
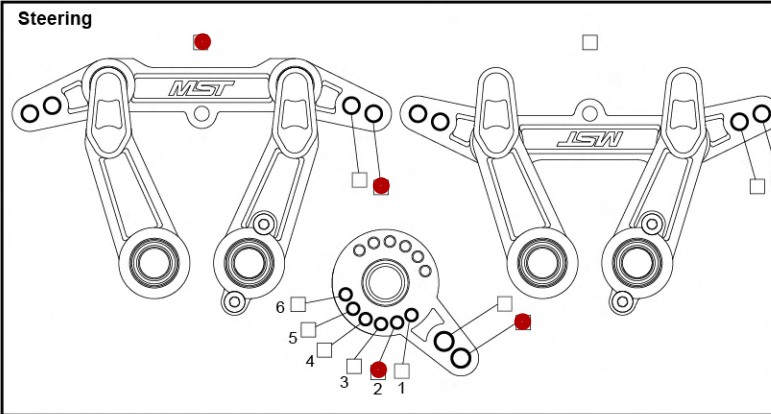
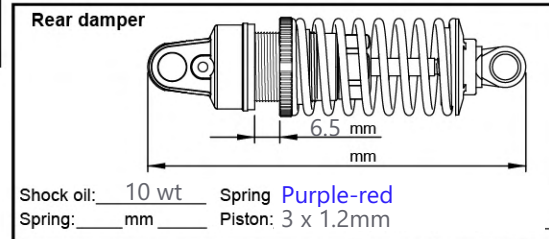
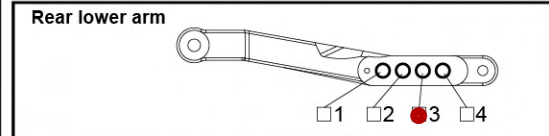
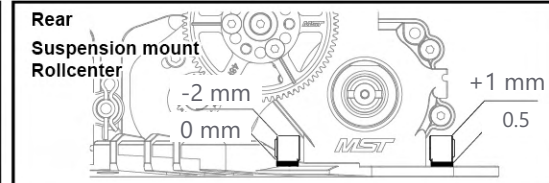
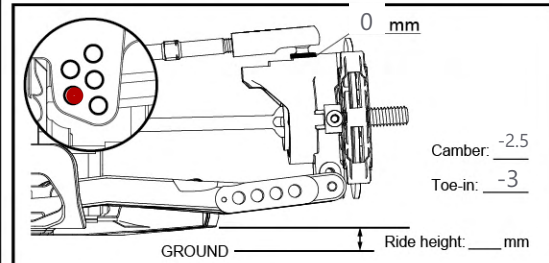
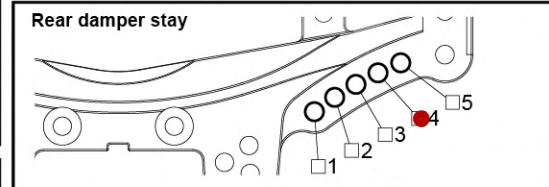

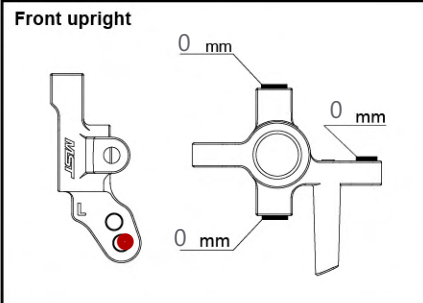
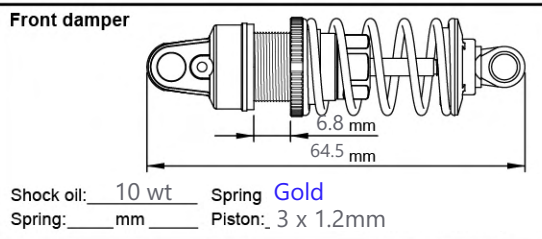
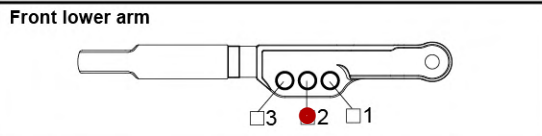
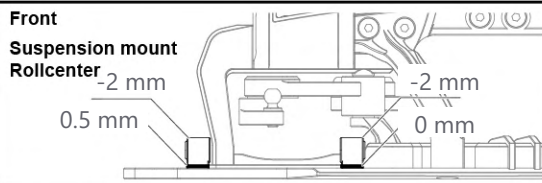
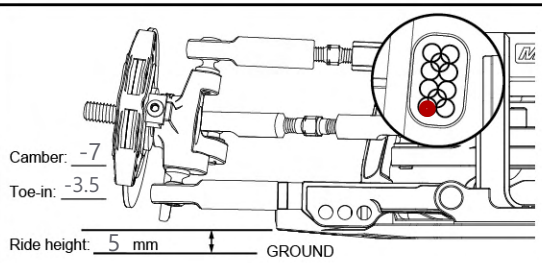
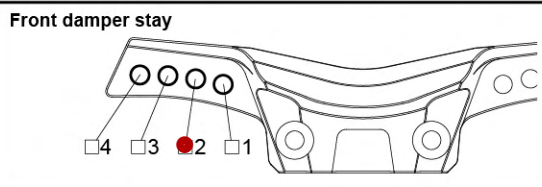
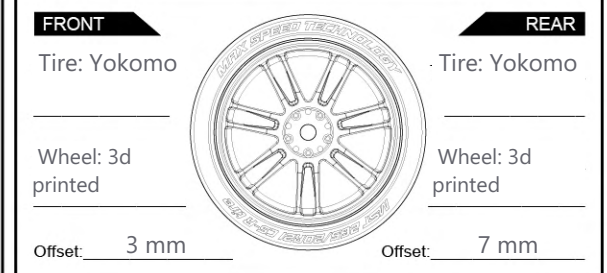

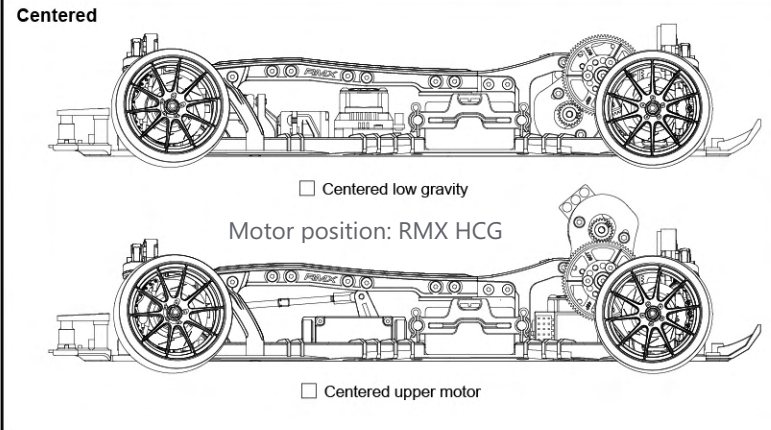



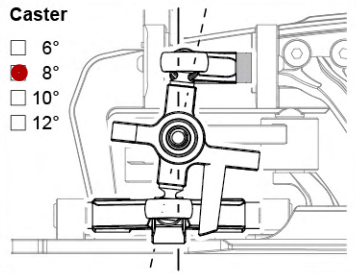


Spur Gear ÷ Pinion Gear × Reduction Gear = Gear ratio


$$115 \div 24 \times 3.00 =$$

Motor Hobbywing 10.5 T ESC: Trinity Battery: Team Powers 6800

Transceiver: Sanwa/Airtronics Gyro: MST mgx Sensitivity: 45 %



☒ Spool
☐ Ball diff.



☐ Alum spool
☐ Alum ball diff.

Transmission type:
 Straight gears

2nd Reduction Gear

- ☐ 32T / 18T - 1.78
☐ 34T / 18T - 1.89
☐ 36T / 17T - 2.12
☐ 40T / 16T - 2.50
☐ 40T / 13T - 3.08
☐ 42T / 11T - 3.82