


Name: _____ Date: _____ Event: _____ Ambient Temp: _____

Track: INDOOR ☐ OUTDOOR ☐ Size: SMALL ☐ MEDIUM ☐ LARGE ☐ Traction: LOW ☐ MEDIUM ☐ HIGH ☐Surface: SMOOTH ☐ BUMPY ☐ RUTTED ☐ Type: LOOSE / LOAMY ☐ HARD PACKED ☐ BLUE GROOVE ☐ CLAY ☐ ASTRO ☐Ackerman/Bumpsteer/Arm Plate/Spindle Height/Servo Saver Condition: DUSTY ☐ DRY ☐ WET ☐ MUDDY ☐

		WASHERS: ☐ PLATE: ☐		L H	SPINDLE PART# TKR9141 (+1,0) TKR9141B (-1, -2)		FULL TURNS FROM FULLY TIGHT	 (FRONT) (REAR) SWAY BAR BUSHINGS
--	--	--	--	------	--	--	---	---

Front End:

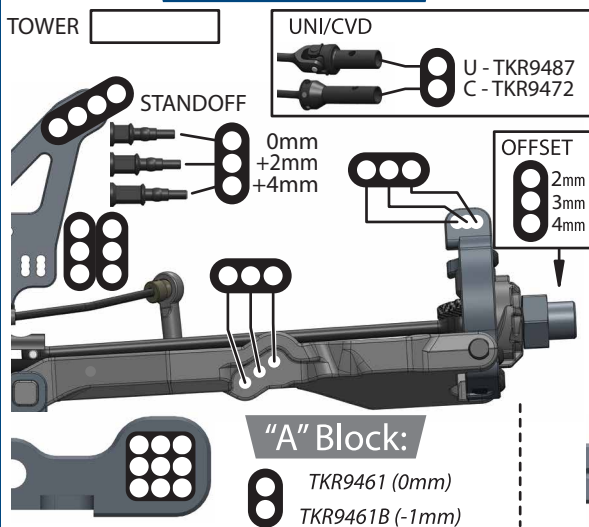

Suspension:


RIDE HEIGHT:	CAMBER:
CASTER BLOCK:	SWEEP:
KICK UP:	TOE:
SWAY BAR:	SHOCK LENGTH:
UP TRAVEL LIMITERS:	DROOP:
OIL:	BRAND:
PISTON:	SPRING:
REBOUND:	BUILD:



Differentials:


OPTION	FRONT	CENTER	REAR
Diff Oil			
(TKR5144B)	☐	☐	☐
(TKR5144)	☐	☐	☐
(TKR5145B)	☐	☐	☐
(TKR9145)	☐	☐	☐
Standard (TKR9114-TKR9112)	☐	☐	☐
Lightened (TKR5114XB-TKR5112x)	☐	☐	☐
(TKR9150)	☐	☐	☐
(TKR9150B)	☐	☐	☐
(TKR9115C)	☐	☐	☐
(TKR9115B)	☐	☐	☐
(TKR9149)	☐	☐	☐
(TKR9149A)	☐	☐	☐

Rear End:

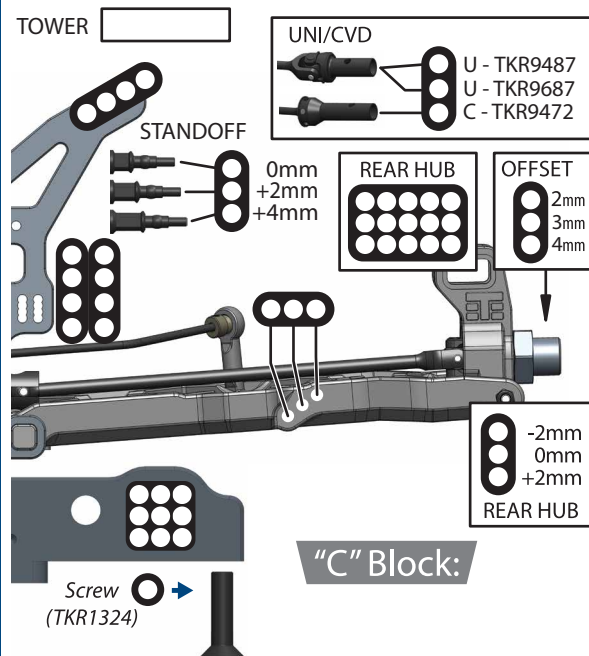

Suspension:

RIDE HEIGHT:	CAMBER:
ANTI-SQUAT:	TOE:
SWAY BAR:	SHOCK LENGTH:
UP TRAVEL LIMITERS:	DROOP:
OIL:	BRAND:
PISTON:	SPRING:
REBOUND:	BUILD:

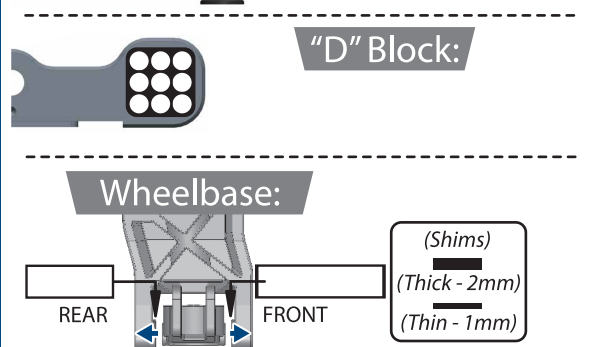

Chassis Braces:

MIDDLE: ☐ REAR: ☐

Tires / Wheels:

BRAND / TREAD:
COMPOUND:
INSERT:
WHEEL:
NOTES:

Body / Wing:

BODY MAKE:
WING MAKE:
WING MOUNT POSITION: 0mm: ☐ +7mm: ☐ +12mm: ☐
NOTES:

Bulkheads:

FRONT	REAR
TKR9416 (0mm) ☐	TKR9416 (0mm) ☐
TKR9416B (-2mm) ☐	TKR9416B (-2mm) ☐

Drivetrain:

PINION / SPUR: _____ / _____ (teeth)

Equipment:

ESC:	MOTOR:
BATTERY:	SERVO:

Notes:

[Open in So Dialed App](#)