
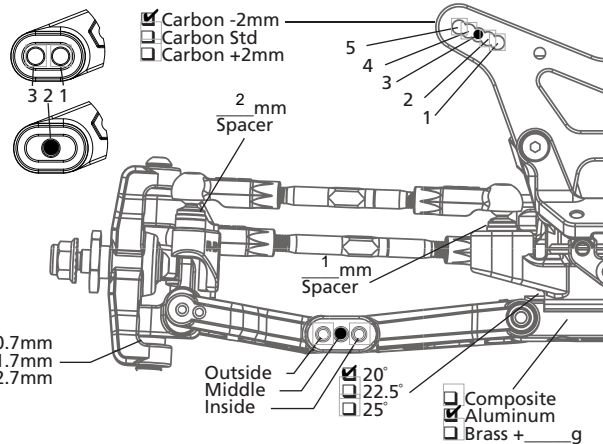
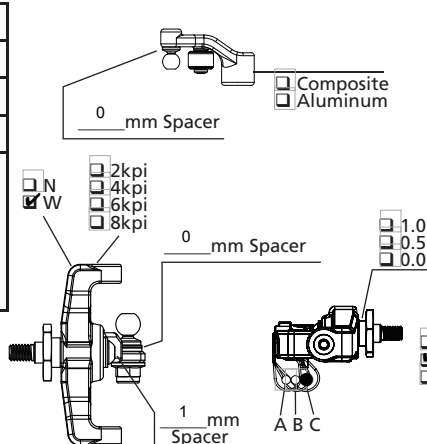


Track Conditions

☒ Indoor	☐ Clay	☒ Carpet	☒ Tight	☒ Smooth	☐ Hard Packed	☐ Blue Groove	☐ Wet	Bite: ☒ Low ☒ Med ☐ High	Setup: AC
☐ Outdoor	☐ Dirt	☐ Astro	☒ Open	☒ Rough	☐ Loose/Loamy	☒ Dry	☐ Dusty	Tread: ☐ Pin ☐ Ghost ☐ Slicks	Open in So Dialed App

Front Suspension




Ride Height	13
Camber	-2.5
Toe	+0.5
Sway Bar	1.3 mm
Titanium Turnbuckles Ceramic Bearings	



Rear Suspension

Ride Height	13
Camber	-2.5
Sway Bar	1.5 mm

Avid -2 C Block
HRC Rear Hubs 0 Height
Rear Shock Eyelet is 0

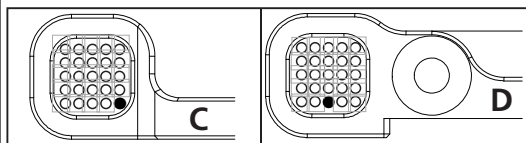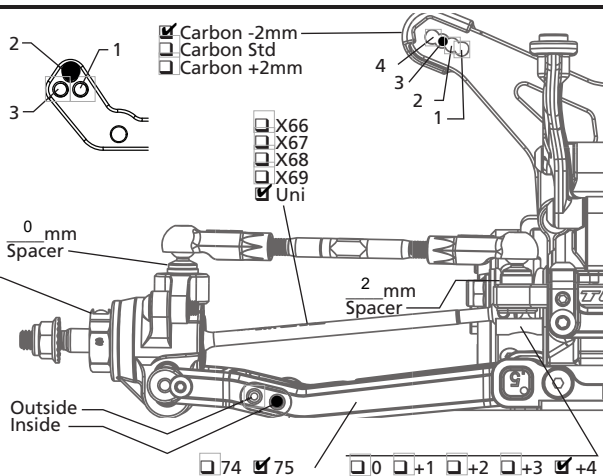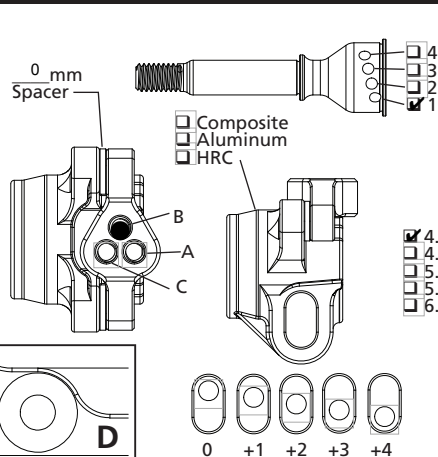


Chassis

Drive Train	
Diff Type	☐ Ball Diff ☒ Gear Diff
Setting/Fluid	100,000
Internal Gears	☒ Steel ☐ Composite
Planet Gears	☒ 2 ☐ 4
Slipper	☒ Slipper ☐ Direct Drive

Aerodynamics	
Body	Kit
Fr Wing	Kit
Rr Wing	PL Air Force 7-inch
Wicker	2nd line
Angle	0 deg
Notes	

Tires		
	Front	Rear
Brand		
Tread		
Compound		
Insert		
Sauce		
Wheel		
Notes		

Shocks



	Front	Rear
Oil	525 cst	425 cst
Piston Holes	3 x 1.5 VRP	3 x 1.6 VRP
Piston	☐ 2mm ☒ 2.5mm	☐ 2mm ☒ 2.5mm
Limiter, Int	4 mm	3 mm
Shaft Dia	☒ 3.0mm ☐ 3.5mm	☒ 3.0mm ☐ 3.5mm
Limiter, Ext	2 mm	0 mm
Stroke	21.5 mm	27.5 mm
Eyelet	☒ Std ☐ +2mm	☐ Std ☒ +2mm
Spring	AEROX Black Responsive	AEROX Blue Responsive
Spring Cup	☐ Low ☒ Mid ☐ High	☒ Low ☐ Mid ☐ High

Electronics

Radio		ESC	
Servo		Thro Prof	
Battery		Timing Adv	
Battery Wt	g	Initial Brake	
Motor		Drag Brake	
Gearing	32 / 72	Thr/Bra EPA	/

