

Setup: My Base Setup

# 1/18 ASPHALT MODIFIED

## SETUP SHEET

Driver : \_\_\_\_\_ carl stevens \_\_\_\_\_ Date: September 20, 2024  
 Track Name: \_\_\_\_\_ City/State: \_\_\_\_\_  
 Surface: \_\_\_\_\_ Indoor Outdoor (circle one)  
 Race: \_\_\_\_\_ Start: \_\_\_\_\_ Finish: \_\_\_\_\_

### Left Front

Tire Compound:  Soft  
 Shock O-Ring: Yes No  
 Shock O-Ring Color: Black Clear  
 Shock Type:  Alum  
 Oil/Grease: \_\_\_\_\_  
 Spring Length:  Short  
 Spring: Soft  Hard  
 Spring Preload: \_\_\_\_\_  
 Caster: \_\_\_\_\_  
 Corner Weight: \_\_\_\_\_  
 Chassis Height: \_\_\_\_\_

### Electronics


Servo: \_\_\_\_\_ 1RC  
 ESC: \_\_\_\_\_ 1RC  
 Tx/RX: Flysky GT2E Flysky GT2E  
 Battery: 4 Cell 5  NiMH  
 Motor: 87  10,000kv

### Left Rear

Tire Compound:  Soft  
 Shock O-Ring: Yes No  
 Shock O-Ring Color: Black Clear  
 Shock Type:  Alum  
 Oil/Grease: \_\_\_\_\_  
 Spring Length:  Short  
 Spring: Soft  Hard  
 Spring Preload: \_\_\_\_\_  
 Caster: \_\_\_\_\_  
 Corner Weight: \_\_\_\_\_  
 Chassis Height: \_\_\_\_\_

### Front

Toe: \_\_\_\_\_  
 Shock caps: Standard  
 Total Car Weight: \_\_\_\_\_

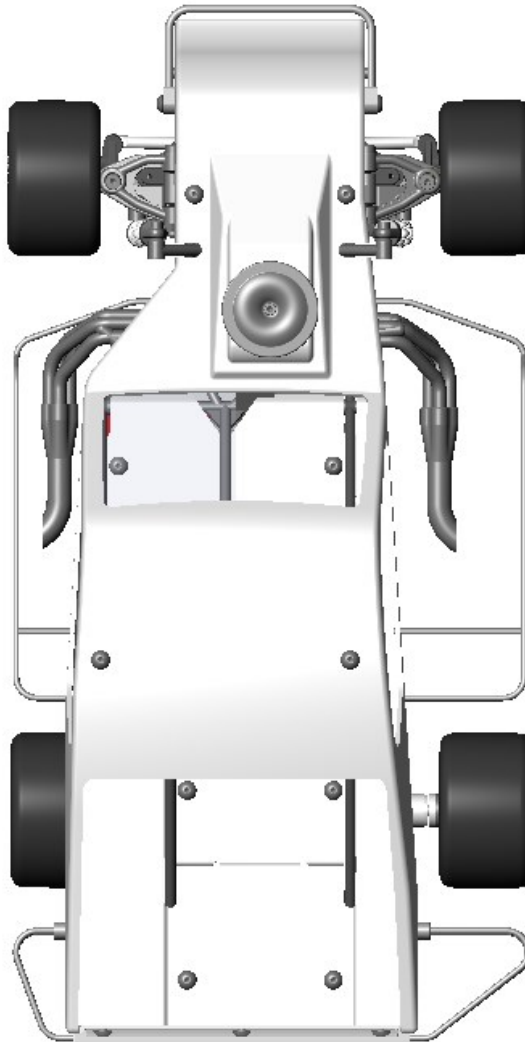

### Rear

Other: \_\_\_\_\_

### Right Front

Tire Compound:  Soft  
 Shock O-Ring: Yes No  
 Shock O-Ring Color: Black Clear  
 Shock Type:  Alum  
 Oil/Grease: \_\_\_\_\_  
 Spring Length:  Short  
 Spring: Soft  Hard  
 Spring Preload: \_\_\_\_\_  
 Caster: \_\_\_\_\_  
 Corner Weight: \_\_\_\_\_  
 Chassis Height: \_\_\_\_\_

### Misc

Servo Arm Hole: Upr Lwr  
 Dual Rate Amount: \_\_\_\_\_  
 Motor Heatsink: Yes No  
 Other: \_\_\_\_\_

### Right Rear

Tire Compound:  Soft  
 Shock O-Ring: Yes No  
 Shock O-Ring Color: Black Clear  
 Shock Type:  Alum  
 Oil/Grease: \_\_\_\_\_  
 Spring Length:  Short  
 Spring: Soft  Hard  
 Spring Preload: \_\_\_\_\_  
 Caster: \_\_\_\_\_  
 Corner Weight: \_\_\_\_\_  
 Chassis Height: \_\_\_\_\_

Notes: \_\_\_\_\_

Full details in app: [sodialed.com/s/jpSh](https://sodialed.com/s/jpSh)