

Tiger Neo N-type 66HL4M-BDV 600-620 Watt

BIFACIAL MODULE WITH
DUAL GLASS

N-Type

Positive power tolerance of 0~+3%

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018

Occupational health and safety management systems



Key Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Higher Power Output

Module power increases 5-25% generally, bringing significantly lower LCOE and higher IRR.



Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.




Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



LINEAR PERFORMANCE WARRANTY

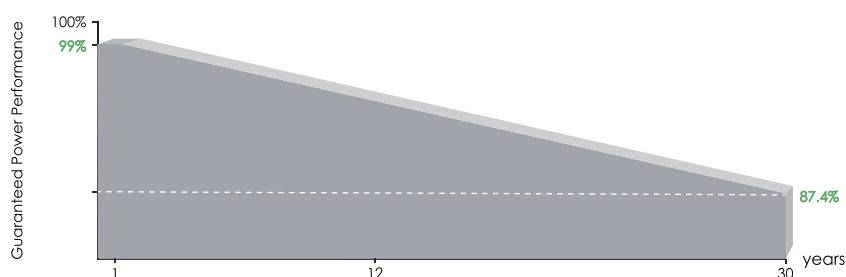


12 Year Product Warranty

30 Year Linear Power Warranty

0.40% Annual Degradation Over 30 years

Engineering Drawings

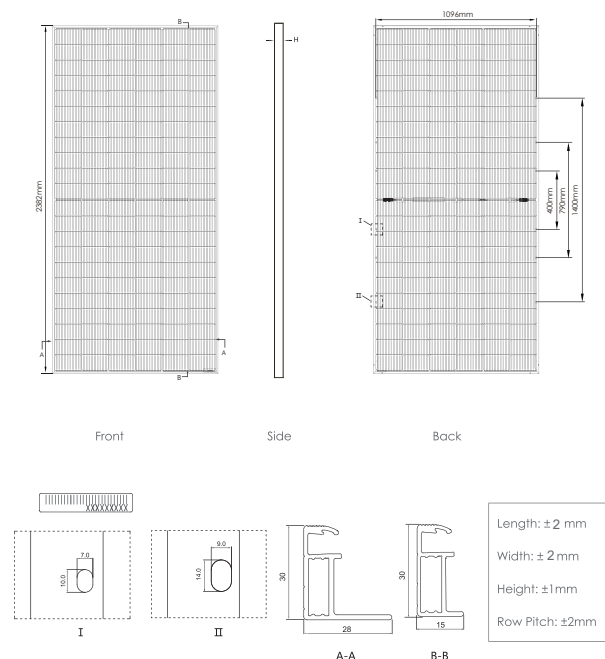


Packaging Configuration

(Two pallets = One stack)

36pcs/pallets, 72pcs/stack, 720pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

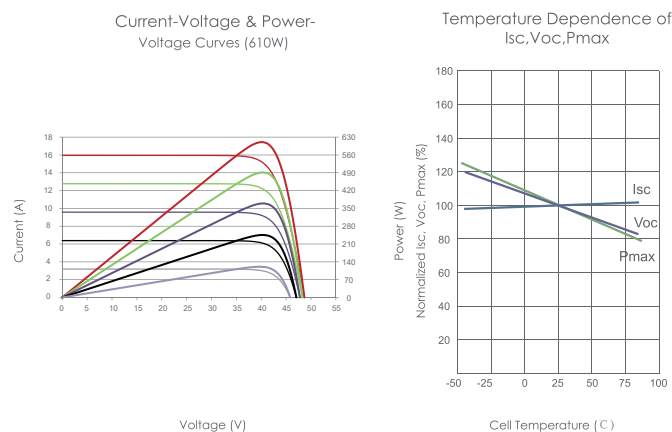

Mechanical Characteristics

Cell Type	N type Mono-crystalline
No. of cells	132 (2×66)
Dimensions	2382×1134×30mm (93.78×44.65×1.18 inch)
Weight	33.4kg (73.63 lbs)
Front Glass	2.0mm, Anti-Reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm ² (+): 400mm , (-): 200mm or Customized Length

SPECIFICATIONS

Module Type	JKM600N-66HL4M-BDV		JKM605N-66HL4M-BDV		JKM610N-66HL4M-BDV		JKM615N-66HL4M-BDV		JKM620N-66HL4M-BDV	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	600Wp	453Wp	605Wp	457Wp	610Wp	461Wp	615Wp	464Wp	620Wp	468Wp
Maximum Power Voltage (Vmp)	40.16V	37.60V	40.31V	37.76V	40.46V	37.92V	40.60V	38.10V	40.74V	38.25V
Maximum Power Current (Imp)	14.94A	12.05A	15.01A	12.10A	15.08A	12.15A	15.15A	12.19A	15.22A	12.24A
Open-circuit Voltage (Voc)	48.28V	45.86V	48.48V	46.05V	48.68V	46.24V	48.88V	46.43V	49.08V	46.62V
Short-circuit Current (Isc)	15.84A	12.79A	15.90A	12.83A	15.96A	12.88A	16.02A	12.93A	16.08A	12.98A
Module Efficiency STC (%)	22.21%		22.40%		22.58%		22.77%		22.95%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1500VDC (IEC)									
Maximum series fuse rating	35A									
Power tolerance	0~+3%									
Temperature coefficient of Pmax	-0.29%/ °C									
Temperature coefficient of Voc	-0.25%/°C									
Temperature coefficient of Isc	0.045%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									
Refer. Bifacial Factor	80±5%									

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	Maximum Power (P_{max})	630Wp	635Wp	641Wp	646Wp	651Wp
	Module Efficiency STC (%)	23.32%	23.52%	23.71%	23.91%	24.10%
15%	Maximum Power (P_{max})	690Wp	696Wp	702Wp	707Wp	713Wp
	Module Efficiency STC (%)	25.54%	25.76%	25.97%	26.18%	26.40%
25%	Maximum Power (P_{max})	750Wp	756Wp	763Wp	769Wp	775Wp
	Module Efficiency STC (%)	27.77%	28.00%	28.23%	28.46%	28.69%

*STC: Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m²

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s