



EFFICIENCY CURVE

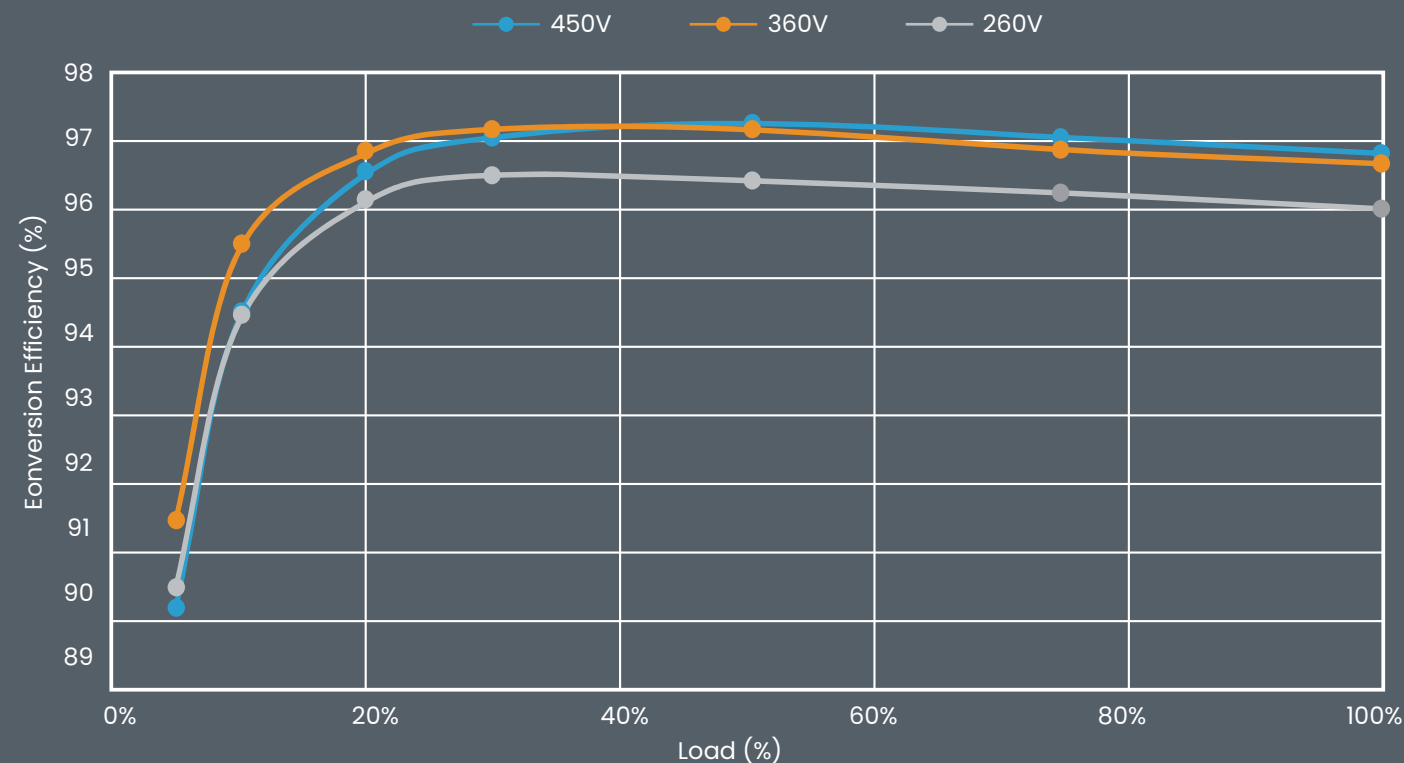

CIRCUIT DIAGRAM

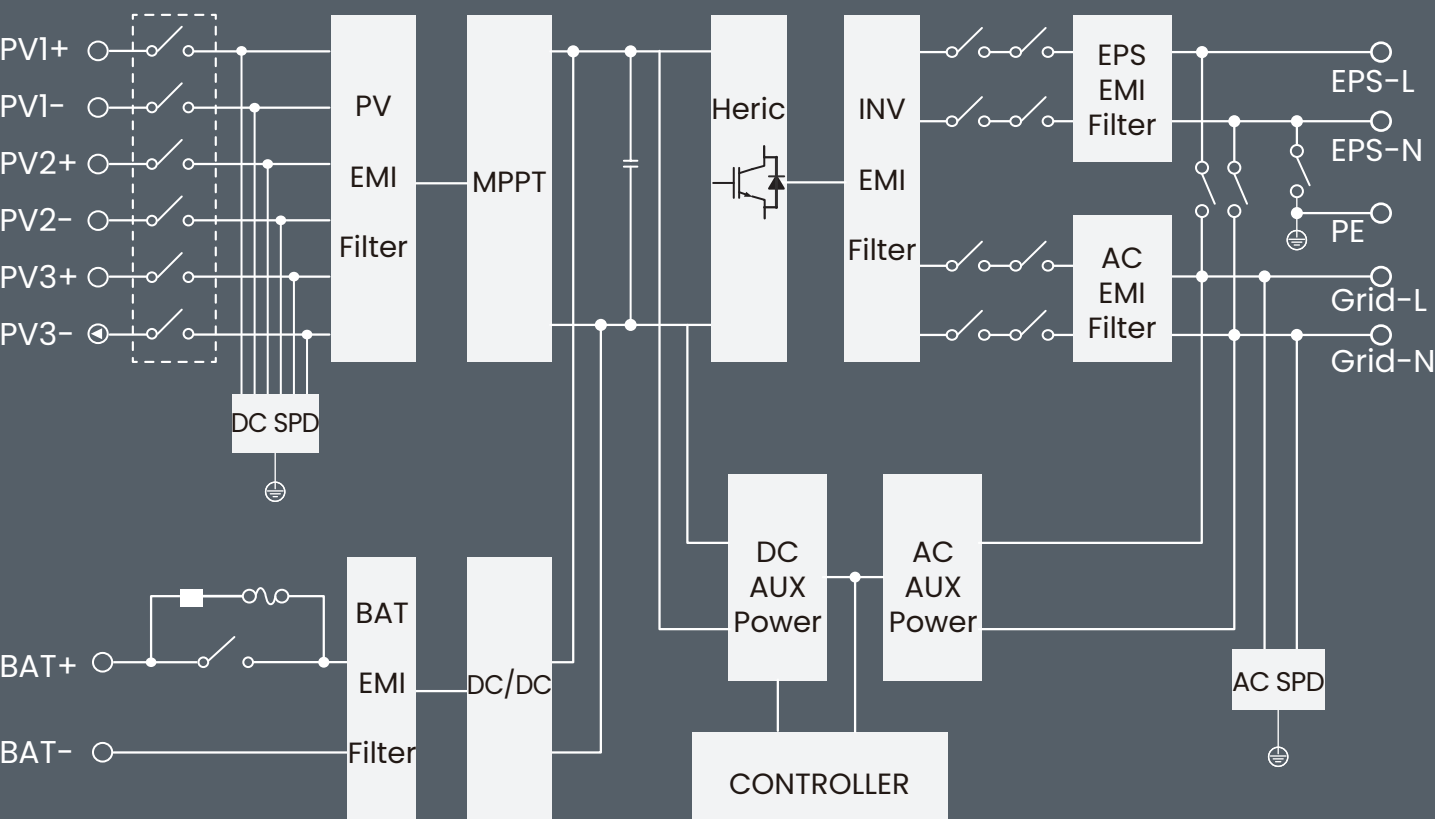

Global: +86 571-56260011
PL: +48 662 430 292

AU: +61 1300 476 529
DE: +49 (0) 6142 4091 664

UK: +44 2476 586998
NED: +31 (0) 8527 37932

info@solaxpower.com
service@solaxpower.com

V1.2. Information may be subject to modify without notice.
650.00040.00



www.solaxpower.com



SOLAX X1-IES

X1-IES
3kW/3.7kW/4.6kW/5kW/6kW/8kW



INTRODUCTION

This is an integrated residential ESS which comes with a 3-8kW hybrid single-phase inverter and extensible battery modules, plug and play, capacity range from 5 to 20 kWh. It has excellent performance in economy, safety and robustness. In addition, intelligent functions like VPP, micro-grid, smart schedule and smart scene are all ready. It would be the best choice for householders.

SolaX IES Features

Economic

- All in one design, plug and play, expandable and installation easily
- Maximum 200% oversize and 200% PV input power
- Maximum 20A DC single string input current, support high power solar panel
- Low start output voltage makes inverter longer working time
- Built-in shadow tracking function
- Maximum Charge / Discharge Current up to 50A

Safe

- IP65 protection level
- AC&DC SPD type II, always guarding the inverter
- AFCI optional

Robust

- Robust back-up ability, switchover time <10ms(UPS level), up to 200% EPS output for 10s
- Battery heating technology, -30°C extreme environment operation

Intelligent

- AI ready, forecasting solar generation and home consumption, smart energy management strategy
- VPP ready, SolaX cloud support resource aggregator(2030.5, OpenADR)
- Micro-grid ready, supporting real-time power balance between PCS and Hybrid in grid-connected and off-grid scenarios.
- Support smart scene function, intelligent loads management (e.g., Heat pump, EV charger)
- Support 7×24h scheduling mode
- Support Wireless meter solution

SYSTEM OVERVIEW

System schematic

Rated output power [kW]	3 / 3.7 / 4.6 / 5 / 6 / 8			
Number of batteries	1	2	3	4
Nominal capacity [kWh] ^①	5.1	10.2	15.3	20.4
Usable energy [kWh] ^②	4.6	9.2	13.8	18.4
Degree of protection	IP65			
Operating temperature range [°C]	-30 to 53			
Allowable relative humidity range [%]	5-95 (No condensation)			
Max. operating altitude [m]	3000			
Net weight [kg] ^③	87.2	134.2	181.2	134.2 / 99.2
Dimension (W x H x D) [mm]	730 x 908 x 210	730 x 1226 x 210	730 x 1544 x 210	730 x 1226 x 210 / 730 x 809 x 150
Display	OLED			
Cooling concept	Natural cooling			
Topology	Transformerless			
Communication	RS485, Pocket-X, USB, CAN, DO, DI			

① Test conditions: 25°C, 100% depth of discharge (DoD), 0.2C charge & discharge.

② System usable energy may vary with inverter different setting.

③ Different inverter models have different weights. The heaviest one is taken as an example.

SPECIFICATIONS

	X1-IES-3K	X1-IES-3.7K	X1-IES-4.6K	X1-IES-5K	X1-IES-6K	X1-IES-8K
INPUT PV						
Max. recommended PV array power [W]	6000	7400	9200	10000	12000	16000
Max. DC voltage [V]	600					
Nominal DC operating voltage [V]	360					
Max. input current (input PV1 / input PV2 / input PV3) [A]	PV1: 20 / PV2: 20	PV1: 20 / PV2: 20	PV1: 20 / PV2: 20 / PV3: 20	PV1: 20 / PV2: 20 / PV3: 20	PV1: 20 / PV2: 20 / PV3: 20	PV1: 20 / PV2: 20 / PV3: 20
Max. short circuit current (input PV1 / input PV2 / input PV3) [A]	PV1: 30 / PV2: 30	PV1: 30 / PV2: 30	PV1: 30 / PV2: 30 / PV3: 30	PV1: 30 / PV2: 30 / PV3: 30	PV1: 30 / PV2: 30 / PV3: 30	PV1: 30 / PV2: 30 / PV3: 30
MPPT voltage range [V]	40 to 560					
Start output voltage [V]	50					
No. of MPP trackers / Strings per MPP tracker	2 / (1 / 1)	2 / (1 / 1)	3 / (1 / 1 / 1)	3 / (1 / 1 / 1)	3 / (1 / 1 / 1)	3 / (1 / 1 / 1)
INPUT AC						
Nominal AC power [VA]	6300	7360	9200	9200	9200	9200
Max. AC current [A]	27.4	32	40.0	40.0	40.0	40.0
Rated grid frequency [Hz]	50 / 60					
Power factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)					
OUTPUT AC (On-Grid)						
Nominal AC power [VA]	3000	3680	4600	5000	6000	8000
Max. apparent AC power [VA]	3300	3680	4600	5000 (4600 for VDE4105, 4999 for AS4777, 5000 for C10111)	6600	8000
Rated grid voltage(AC voltage range) [V]	Single phase, 220 / 230 / 240					
Rated grid frequency [Hz]	50 / 60					
Rated AC output current [A]	13.1	16	20	21.8	26.1	34.8
Max. AC current [A] @230V	14.4	16	20	21.8	28.7	34.8
Displacement power factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)					
Total harmonic distortion (THDi, rated power) [%]	< 3					

	X1-IES-3K	X1-IES-3.7K	X1-IES-4.6K	X1-IES-5K	X1-IES-6K	X1-IES-8K
EPS OUTPUT (With battery)						
EPS peak power [VA]	2Pn, 10s (Full sun)					
EPS rated power [VA]	3000	3680	4600	5000	6000	8000
EPS rated voltage [V], frequency [Hz]	Single phase, 220 / 230 / 240					
EPS rated current [A]	13.1	16	20	21.8	26.1	34.8
Switchover time [ms]	< 10					
Total harmonic distortion (THDv, linear Load) [%]	< 3					
BATTERY						
Battery voltage range [V]	80 ~ 480					
Max.charge / discharge current [A]	50					
Communication interfaces	CAN / RS485					
BMS module	TBMS-MCS0800E					
Battery module	TP-H550E					
Composition	TBMS-MCS0800E + TP-H550E * n + Base Dimensions + Series Box (Required for two columns)					
Battery type	Li-ion (LFP)					
Nominal capacity [kWh] / Nominal capacity [Ah] ^①	5.1 / 50					
Usable energy [kWh] ^②	4.6					
Standard power [kW]	3					
Max power [kW]	5.1					
Max. charge / discharge current [A] ^③	50					
Cycle life [Cycles]	> 6000					
Warranty [Years]	10					
Safety	CE, RCM, TUV (IEC62619), RoHS, REACH					
TBMS-MCS0800E dimensions(L x W x H) [mm] / Weight [kg]	730 x 150 x 165 / 9.3					
TP-H550E dimensions(L x W x H) [mm] / Weight [kg]	730 x 150 x 318 / 47					
Base dimensions(L x W x H) [mm] / Weight [kg]	730 x 150 x 75 / 3.9					
Series box dimensions(L x W x H) [mm] / Weight [kg]	167 x 121 x 91.5 / 1.3					
EFFICIENCY						
Max. efficiency [%] / Euro-efficiency [%]	98 / 97.7					
Rated battery charge [%] / Discharge efficiency [%]	98.5 / 97					
GENERAL DATA (INVERTER)						
Dimensions (W/H/D) [mm]	717 x 350 x 210					
Weight [kg]	< 28					
Operating temperature range [°C]	~ 35 to 60 (derating at 45°C)					
Relative humidity [%]	0 to 100 (condensing)					
Storage temperature [°C]	-40 to 65					
Noise emission (typical) [dB(A)]	< 35					
Internal consumption (night) [W]	< 40W for hot standby, < 5W for cold standby					
PROTECTION						
Anti-islanding protection	Yes					
DC reverse polarity protection	Yes					
Insulation monitoring	Yes					
Residual current monitoring	Yes					
AC overcurrent protection	Yes					
AC short-circuit protection	Yes					
AC overvoltage protection	Yes					
Over-heat protection	Yes					
AFCI	OPT					
Surge protection	Type II , DC and AC					
STANDARD						
Safety	IEC62109-1 / ICE62109-2					
EMC	EN 61000-6-1 / EN 61000-6-2 / EN 61000-6-3					
Certification	VDE 0126-1-1 A1:2012 / VDE-AR-N 4105 / G98/G99/ AS4777 / EN50549 / CEI 0-21					


① Test conditions: 25°C, 100% depth of discharge (DoD), 0.2C charge & discharge.

② System usable energy may vary with inverter different setting.


③ Discharge: In case of battery cell's temperature range of -20°C~10°Cand 45°C~53 °C,the discharge current will be reduced; Charge: In case of battery cell's temperature range of 0°C~25°C and 45°C~53°C, the charge current will be reduced. Product charge or discharge power depends on the actual temperature of battery pack.

TACTICAL SCENARIO


PARTIAL SOLUTION

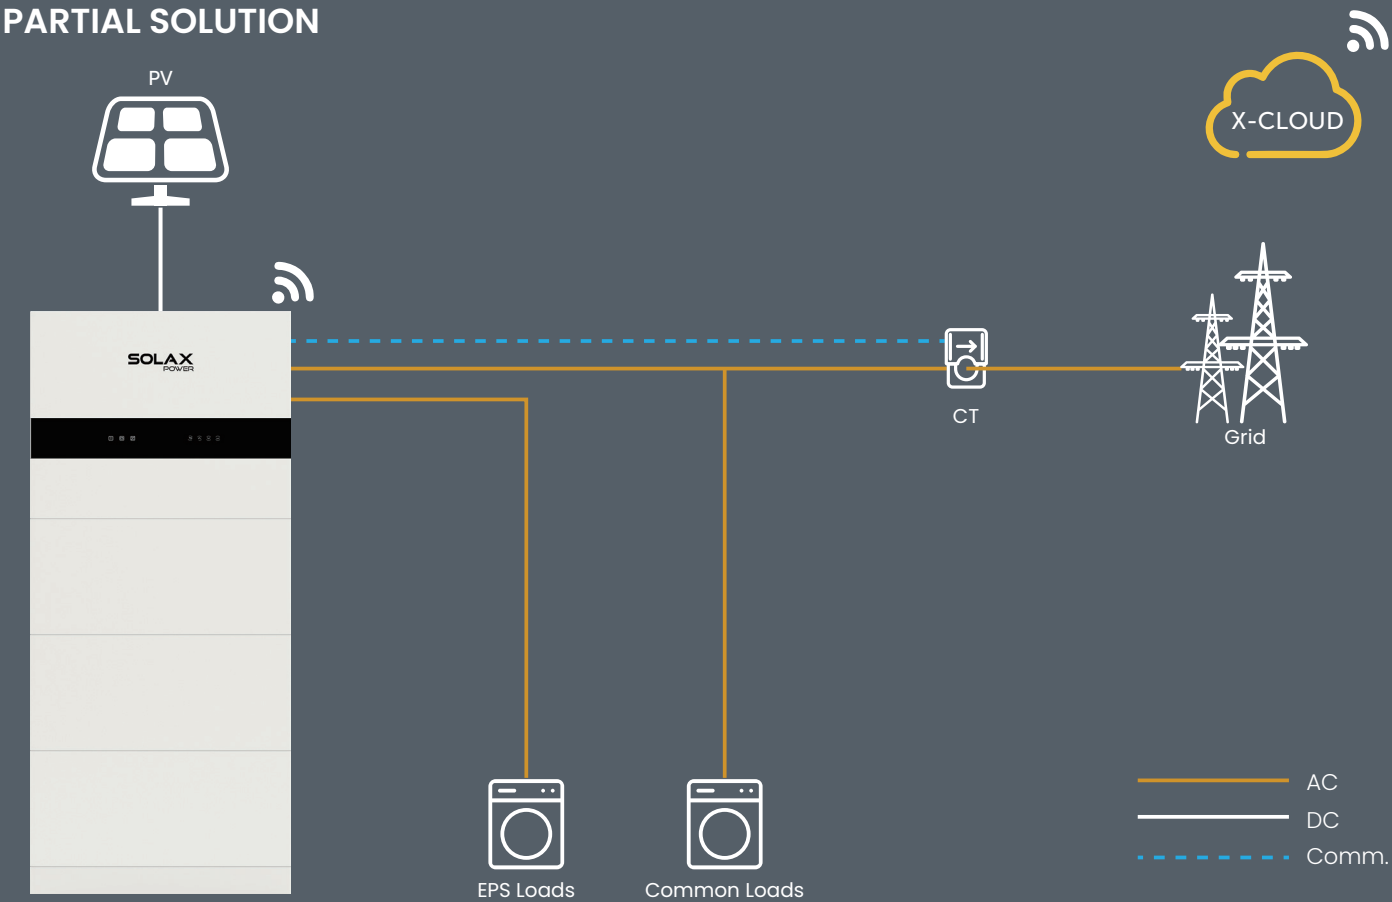

PARALLEL & GENERATOR INTEGRATED SOLUTION

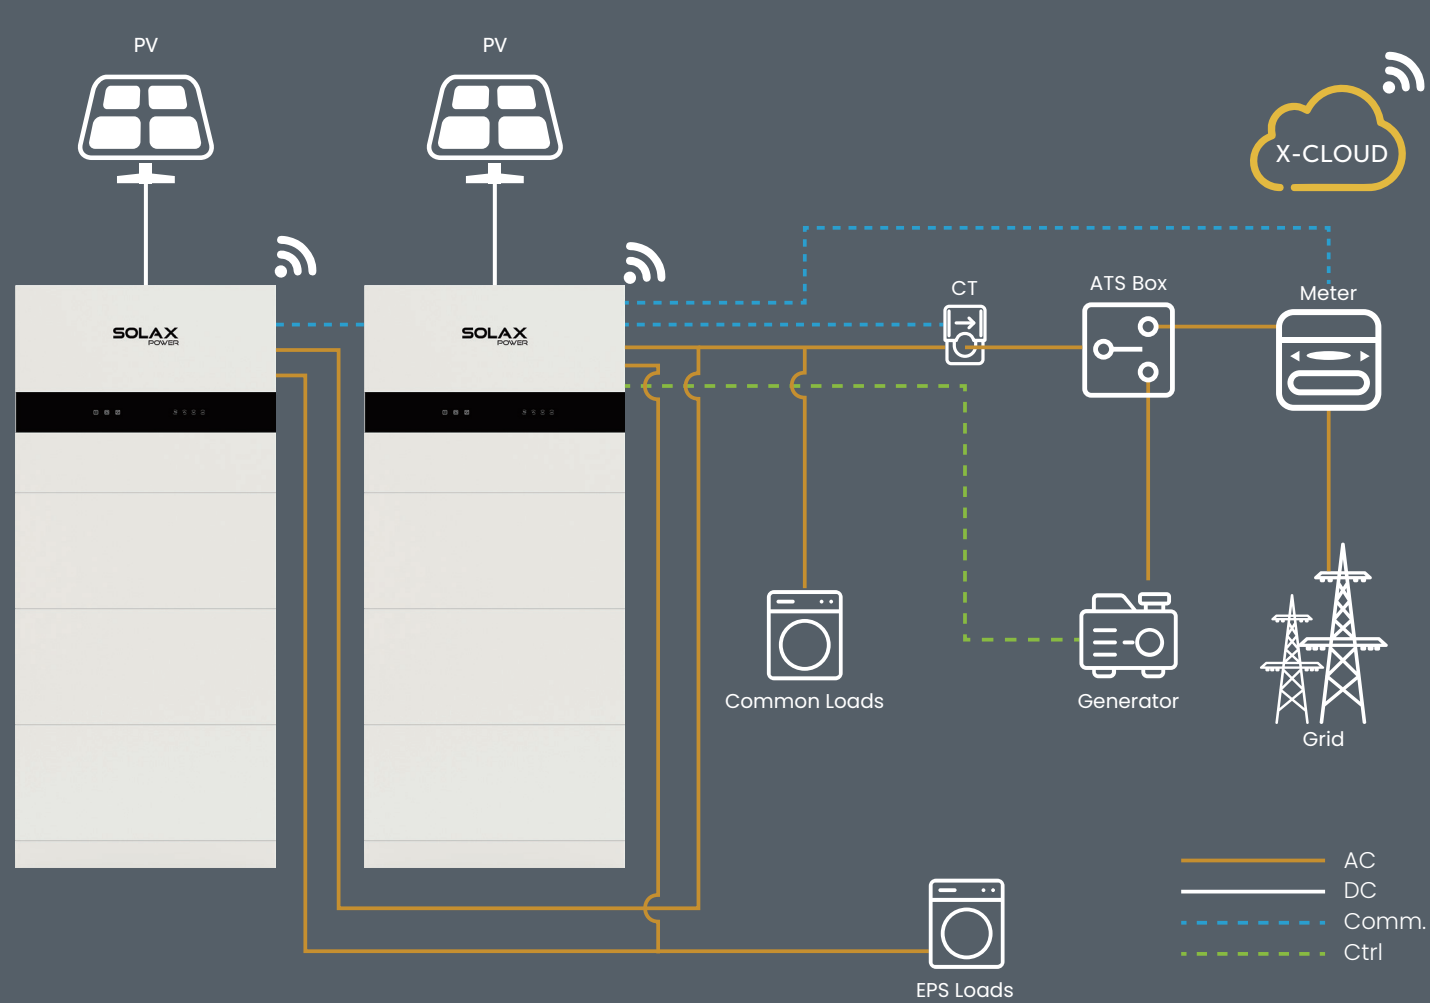

WHOLE HOME BACKUP SOLUTION

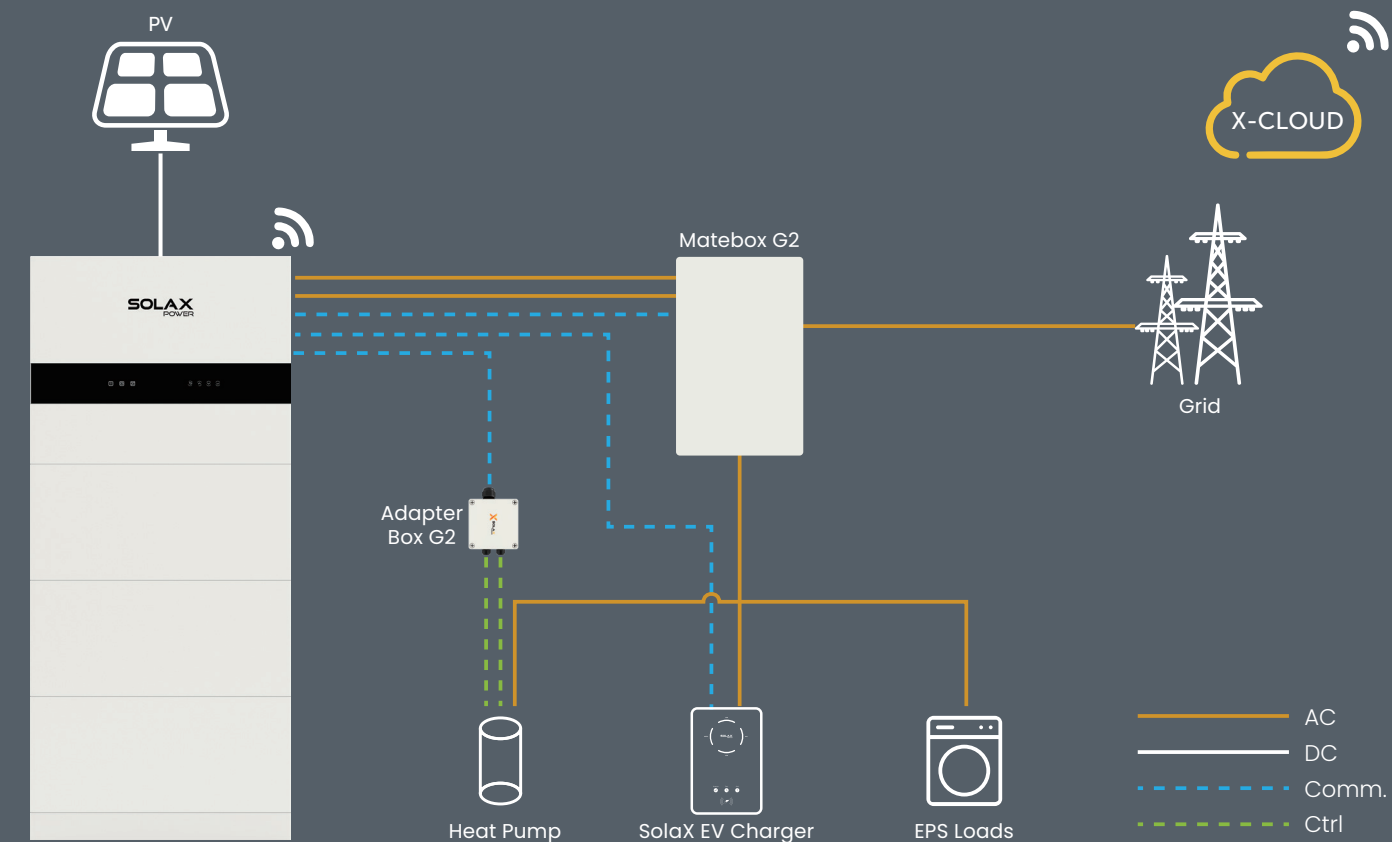

Derating Curve (8kw)

