



R-32 HIGH-EFFICIENCY PACKAGED HEAT PUMP UP TO 15.2 SEER2 / 6.7 HSPF2 2 TO 5 TONS

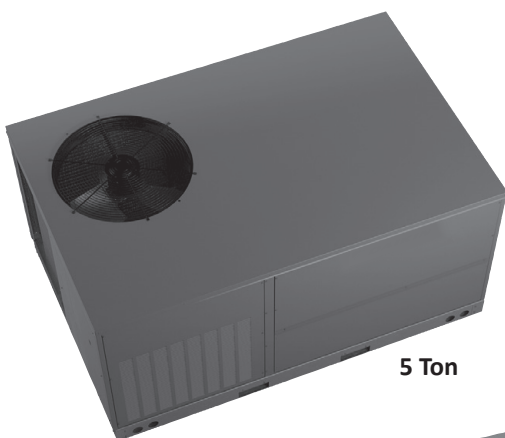

5 Ton

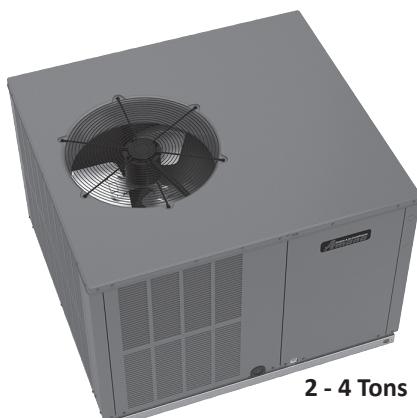

2 - 4 Tons

R32

Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data.....	4
Expanded Heating Data.....	28
Airflow Data.....	30
Heat Kit Electrical Data.....	32
Dimensions.....	34
Wiring Diagrams.....	38
Accessories.....	40

Standard Features

- High-efficiency two-stage scroll compressor
- Variable-speed ECM indoor blower motor
2 to 4-ton units
- Multi-speed ECM indoor blower motor 5-ton units
- Convertible airflow: horizontal or downflow
- Copper tube / aluminum fin condenser coils
- Compressor sound blanket
- All-aluminum evaporator coil on 2- to 4-ton units
- Aluminum-copper evaporator coil on 5-ton units
- Electric heat kit available as a
field-installed option
- AHRI Certified; UL Listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive
two-tone Architectural Gray powder-paint finish
- Aluminum foil-facing internal insulation
reinforced with fiberglass scrim
- Fully insulated air-handling compartment
with convenient access panels
- Louvered condenser coil protection
- Meets cabinet air leakage requirements when
tested in accordance with ASHRAE standard 193
- When properly anchored, meets the 2023 Florida
Building Code unit integrity requirements for
hurricane-type winds (Anchor bracket kits available)



COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV GL
 ■ ISO 9001 ■

COMPANY WITH
 ENVIRONMENTAL SYSTEM
 CERTIFIED BY DNV GL
 ■ ISO 14001 ■

* Complete warranty details available from your local dealer or at www.amana-hac.com. To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home) and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration and some of the additional requirements are not required in Florida, California, or Québec. The duration of warranty coverage in Texas and Florida differs in some cases. Other limitations and exclusions apply; refer to complete warranty details for a full list of limitations and exclusions.

	A	P	H	M	5	24	4	1	A	A		
	1	2	3	4	5	6,7	8	9	10	11		
Brand										Minor Revision		
A Amana brand										A		
Product Category									Major Revision			
P Packaged Unit									A			
Unit Type								Electrical				
C Air Conditioner								1 208/230 V/1 Phase/60 Hz				
H Heat Pump								Refrigerant				
								4 R-32				
Airflow											Nominal Capacity	
H Horizontal												
M Multi-Position												
Efficiency												
3 13.4 SEER2												
5 15.2 SEER2												
						</						

	APHM5 2431	APHM5 3031	APHM5 3631	APHM5 4231	APHM5 4831	APHM5 6031
COOLING CAPACITY						
Total BTU/h	24,000	29,600	36,000	42,000	45,500	60,000
Sensible BTU/h	18,720	22,200	26,640	29,820	34,580	45,000
SEER2	14.4	15.2	15.2	15.0	15.2	15.4
EER2	11.4	11.4	11.4	11.4	11.4	11.6
HEATING CAPACITY						
BTU/h (47°F)	22,600	28,600	35,500	41,000	41,000	59,000
C.O.P. (47°F)	3.64	3.58	3.66	3.60	3.72	3.80
BTU/h (17°F)	12,900	16,900	22,800	23,400	22,600	35,000
C.O.P. (17°F)	2.18	2.34	2.38	2.16	2.14	2.50
HSPF2	6.70	6.70	6.70	6.80	6.80	7.70
EVAPORATOR FAN / COIL						
Type	ECM	ECM	ECM	ECM	ECM	ECM
Wheel (D x W)	10 x 9	10 x 9	10 x 9	10 x 9	10 x 9	11 x 10
Indoor Nominal CFM	800	980	1200	1275	1575	1950
No. of Speeds	5	5	5	5	5	5
Indoor Blower FLA	3.8	3.8	3.8	5.4	5.4	6.9
HORSEPOWER - RPM	1/2	1/2	3/4	3/4	3/4	1
Face Area (ft ²)	4.55	4.55	6.20	6.20	6.20	9.16
Rows Deep / Fins per Inch	4 / 14	4 / 14	4 / 14	4 / 14	4 / 14	4 / 16
Metering Device Type	TXV	TXV	TXV	TXV	TXV	TXV
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	102	124	144	136	137	185
Condenser Fan / Coil						
OUTDOOR FAN FLA	1.3	1.3	1.4	1.4	1.4	3.5
Horsepower	¼	¼	¼	¼	¼	½
Blade Diameter	22	22	22	22	22	22
Face Area (ft ²)	15.24	15.24	19.05	19.05	19.05	19.01
ROWS DEEP / FINS PER INCH	2 / 16	2 / 16	2 / 16	2 / 16	2 / 16	2 / 16
Metering Device Type	TXV	TXV	TXV	TXV	TXV	TXV
Compressor						
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
Stage	1	2	2	2	2	2
RLA	10.62	13.06	18.37	23.23	23.23	27.07
LRA	56.5	88	126	128.4	128.4	178
Electrical Data						
Phase	1	1	1	1	1	1
Voltage (Frequency 60 Hz)	208-230	208-230	208-230	208-230	208-230	208-230
Min. Circuit Ampacity	18.7	21.5	22.8	31.7	33.3	39
MAX. OVERCURRENT PROTECTION	25	30	35	50	50	60
Decibels	76	76	76	78	78	78
Operating / Shipping Weights (lbs)	376	385	492	492	492	688

Note:

Always check the S&R plate for electrical data on the unit being installed.

Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Horizontal duct covers along with either a "Downflow Conversion Kit" or a "Downflow Economizer" is mandatory for all downflow installations. See Accessories table for appropriate kit number(s)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
70	600	MBh	24.1	24.5	25.2	-	23.9	24.3	25.0	-	23.3	23.6	24.4	-	22.2	22.5	23.3	-	20.9	21.2	21.9	-	19.6	20.0	20.7	-											
		S/T	0.53	0.45	0.31	-	0.53	0.46	0.32	-	0.56	0.48	0.34	-	1.00	0.50	0.36	-	1.00	0.52	0.38	-	1.00	0.58	0.44	-											
		ΔT	20.84	19.04	15.68	-	20.79	18.99	15.63	-	21.04	19.24	15.88	-	20.77	18.97	15.61	-	20.53	18.73	15.37	-	21.66	19.86	16.49	-											
		kW	1.61	1.61	1.60	-	1.81	1.80	1.80	-	2.03	2.02	2.02	-	2.26	2.26	2.26	-	2.53	2.53	2.52	-	2.84	2.84	2.84	-											
		Amps	6.07	6.06	6.05	-	6.93	6.92	6.91	-	7.88	7.88	7.86	-	8.92	8.91	8.90	-	10.07	10.07	10.05	-	11.43	11.42	11.41	-											
	Hi PR	250	251	253	-	290	291	293	-	332	333	334	-	377	378	379	-	425	426	428	-	477	478	480	-												
	Lo PR	126	127	130	-	133	135	138	-	140	142	145	-	146	147	151	-	152	153	156	-	159	160	163	-												
	800	MBh	24.7	25.1	25.8	-	24.5	24.9	25.6	-	23.9	24.2	25.0	-	22.8	23.1	23.9	-	21.4	21.8	22.5	-	20.2	20.6	21.3	-											
		S/T	0.68	0.61	0.47	-	0.69	0.61	0.47	-	1.00	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	1.00	0.59	-											
		ΔT	18.38	16.58	13.22	-	18.33	16.53	13.17	-	18.58	16.78	13.42	-	18.31	16.51	13.15	-	18.07	16.27	12.91	-	19.20	17.40	14.04	-											
kW		1.63	1.63	1.63	-	1.83	1.83	1.82	-	2.05	2.05	2.04	-	2.29	2.29	2.28	-	2.55	2.55	2.55	-	2.86	2.86	2.86	-												
Amps		6.17	6.16	6.15	-	7.03	7.02	7.01	-	7.98	7.98	7.96	-	9.02	9.01	9.00	-	10.17	10.17	10.15	-	11.53	11.52	11.51	-												
1000	Hi PR	255	256	257	-	294	295	297	-	336	337	339	-	381	382	384	-	429	431	432	-	481	482	484	-												
	Lo PR	129	131	134	-	137	139	142	-	144	145	149	-	150	151	154	-	155	157	160	-	162	164	167	-												
	MBh	25.6	25.9	26.7	-	25.4	25.7	26.4	-	24.7	25.1	25.8	-	23.6	24.0	24.7	-	22.3	22.6	23.4	-	21.1	21.4	22.1	-												
	S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.55	-	1.00	0.70	0.57	-	1.00	0.73	0.59	-	1.00	1.00	0.64	-												
	ΔT	16.65	14.85	11.49	-	16.60	14.80	11.44	-	16.86	15.06	11.69	-	16.58	14.78	11.42	-	16.34	14.54	11.18	-	17.47	15.67	12.31	-												

IDB		Outdoor Ambient Temperature												115°F																	
		65°F						75°F						85°F						95°F						105°F					
		Entering Indoor Wet Bulb Temperature																													
AIRFLOW	59	63	67	71	71	59	63	67	71	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
600	MBh	24.3	24.6	25.4	26.5	26.3	24.1	24.4	25.1	26.3	23.4	23.8	24.5	25.6	22.3	22.7	23.4	24.5	21.0	21.3	22.1	23.2	19.8	20.1	20.8	22.0	19.8	20.1	20.8	22.0	
	S/T	1.00	0.71	0.57	0.4	0.4	1.00	0.72	0.58	0.4	1.00	0.74	0.60	0.5	1.00	1.00	0.62	0.5	1.00	1.00	0.65	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.70	0.6	
	ΔT	28.78	26.98	23.62	20.1	20.1	28.73	26.93	23.57	20.1	28.99	27.19	23.82	20.3	28.71	26.91	23.55	20.1	28.47	26.67	23.31	19.8	29.60	27.80	24.44	21.0	29.60	27.80	24.44	21.0	
	kW	1.61	1.61	1.60	1.6	1.8	1.81	1.80	1.80	1.8	2.03	2.02	2.02	2.0	2.26	2.26	2.26	2.3	2.53	2.53	2.52	2.5	2.84	2.84	2.84	2.9	2.84	2.84	2.84	2.9	
	Amps	6.07	6.06	6.05	6.1	7.0	6.93	6.92	6.90	7.0	7.88	7.87	7.86	7.9	8.92	8.91	8.89	9.0	10.07	10.07	10.05	10.1	11.43	11.42	11.41	11.5	11.43	11.42	11.41	11.5	
	Hi PR	251	252	254	258.0	297.8	291	292	293	297.8	332	333	335	339.5	377	378	380	384.5	426	427	429	432.9	477	478	480	484.6	477	478	480	484.6	
Lo PR	126	128	131	136.5	144.2	134	136	139	144.2	141	142	146	151.0	147	148	151	156.8	152	154	157	162.4	159	161	164	169.5	159	161	164	169.5		
800	MBh	24.9	25.2	26.0	27.1	26.8	24.7	25.0	25.7	26.8	24.0	24.4	25.1	26.2	22.9	23.3	24.0	25.1	21.6	21.9	22.7	23.8	20.4	20.7	21.4	22.5	20.4	20.7	21.4	22.5	
	S/T	1.00	0.87	0.73	0.6	0.6	1.00	0.87	0.73	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.7	
	ΔT	26.32	24.52	21.16	17.7	17.6	26.27	24.47	21.11	17.6	26.53	24.73	21.37	17.9	26.26	24.46	21.09	17.6	26.02	24.22	20.85	17.4	27.14	25.34	21.98	18.5	27.14	25.34	21.98	18.5	
	kW	1.63	1.63	1.63	1.6	1.8	1.83	1.83	1.82	1.8	2.05	2.05	2.04	2.1	2.29	2.29	2.28	2.3	2.55	2.55	2.55	2.6	2.86	2.86	2.86	2.9	2.86	2.86	2.86	2.9	
	Amps	6.17	6.16	6.15	6.2	7.1	7.03	7.02	7.00	7.1	7.98	7.98	7.96	8.0	9.02	9.01	9.00	9.1	10.17	10.17	10.15	10.2	11.53	11.52	11.51	11.6	11.53	11.52	11.51	11.6	
	Hi PR	255	256	258	262.5	302.3	295	296	298	302.3	337	338	340	344.1	382	383	385	389.0	430	431	433	437.4	482	483	485	489.1	482	483	485	489.1	
Lo PR	130	131	135	140.1	147.9	138	139	142	147.9	144	146	149	154.7	150	152	155	160.4	156	157	161	166.1	163	164	168	173.1	163	164	168	173.1		
1000	MBh	25.7	26.1	26.8	27.9	27.7	25.5	25.9	26.6	27.7	24.9	25.2	25.9	27.1	23.8	24.1	24.8	26.0	22.4	22.8	23.5	24.6	21.2	21.6	22.3	23.4	21.2	21.6	22.3	23.4	
	S/T	1.00	0.91	0.77	0.6	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	
	ΔT	24.60	22.80	19.43	16.0	15.9	24.55	22.75	19.39	15.9	24.80	23.00	19.64	16.2	24.53	22.73	19.37	15.9	24.29	22.49	19.13	15.6	25.42	23.61	20.25	16.8	25.42	23.61	20.25	16.8	
	kW	1.65	1.65	1.64	1.7	1.9	1.85	1.84	1.84	1.9	2.07	2.06	2.06	2.1	2.30	2.30	2.30	2.3	2.57	2.57	2.56	2.6	2.88	2.88	2.88	2.9	2.88	2.88	2.88	2.9	
	Amps	6.24	6.23	6.22	6.3	7.1	7.10	7.09	7.07	7.1	8.05	8.05	8.03	8.1	9.09	9.08	9.07	9.1	10.24	10.24	10.22	10.3	11.60	11.59	11.58	11.6	11.60	11.59	11.58	11.6	
	Hi PR	259	261	262	266.7	306.6	299	300	302	306.6	341	342	344	348.3	386	387	389	393.2	434	435	437	441.7	486	487	489	493.4	486	487	489	493.4	
Lo PR	134	136	139	144.6	152.3	142	144	147	152.3	149	150	154	159.1	155	156	159	164.9	160	162	165	170.5	167	169	172	177.6	167	169	172	177.6		

600	MBh	24.7	25.0	25.8	26.9	24.5	24.8	25.6	26.7	23.8	24.2	24.9	26.0	22.7	23.1	23.8	24.9	21.4	21.7	22.5	23.6	20.2	20.5	21.3	22.4
	S/T	1.00	0.81	0.68	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.73	0.6	1.00	1.00	1.00	0.6	1.00	1.00	1.00	0.7
	ΔT	32.32	30.52	27.15	23.7	32.27	30.47	27.11	23.6	32.52	30.72	27.36	23.9	32.25	30.45	27.09	23.6	32.01	30.21	26.85	23.4	33.14	31.34	27.97	24.5
	kW	1.61	1.61	1.61	1.6	1.81	1.81	1.80	1.8	2.03	2.03	2.02	2.0	2.27	2.27	2.26	2.3	2.53	2.53	2.53	2.5	2.85	2.84	2.84	2.9
	Amps	6.09	6.08	6.06	6.1	6.94	6.94	6.92	7.0	7.90	7.89	7.88	7.9	8.93	8.93	8.91	9.0	10.09	10.08	10.07	10.1	11.44	11.44	11.42	11.5
	Hi PR	252	253	255	259.2	292	293	295	299.0	333	335	336	340.7	378	379	381	385.7	427	428	430	434.1	479	480	481	485.8
	Lo PR	128	130	133	138.4	136	137	141	146.1	143	144	148	152.9	148	150	153	158.7	154	156	159	164.3	161	163	166	171.4
800	MBh	25.3	25.6	26.4	27.5	25.1	25.4	26.1	27.3	24.4	24.8	25.5	26.6	23.3	23.7	24.4	25.5	22.0	22.3	23.1	24.2	20.8	21.1	21.8	23.0
	S/T	1.00	0.97	0.83	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
	ΔT	29.86	28.06	24.70	21.2	29.81	28.01	24.65	21.2	30.06	28.26	24.90	21.4	29.79	27.99	24.63	21.1	29.55	27.75	24.39	20.9	30.68	28.88	25.52	22.0
	kW	1.64	1.63	1.63	1.6	1.83	1.83	1.83	1.8	2.05	2.05	2.05	2.1	2.29	2.29	2.29	2.3	2.56	2.55	2.55	2.6	2.87	2.87	2.86	2.9
	Amps	6.19	6.18	6.16	6.2	7.04	7.04	7.02	7.1	8.00	7.99	7.98	8.0	9.03	9.03	9.01	9.1	10.19	10.18	10.17	10.2	11.55	11.54	11.52	11.6
	Hi PR	256	258	259	263.7	296	297	299	303.5	338	339	341	345.3	383	384	386	390.2	431	432	434	438.6	483	484	486	490.3
	Lo PR	132	133	137	142.1	140	141	144	149.8	146	148	151	156.6	152	154	157	162.3	158	159	163	168.0	165	166	170	175.0
1000	MBh	26.1	26.5	27.2	28.3	25.9	26.3	27.0	28.1	25.3	25.6	26.4	27.5	24.2	24.5	25.3	26.4	22.8	23.2	23.9	25.0	21.6	22.0	22.7	23.8
	S/T	1.00	1.00	0.88	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.91	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9
	ΔT	28.13	26.33	22.97	19.5	28.08	26.28	22.92	19.4	28.33	26.53	23.17	19.7	28.06	26.26	22.90	19.4	27.82	26.02	22.66	19.2	28.95	27.15	23.79	20.3
	kW	1.65	1.65	1.65	1.7	1.85	1.85	1.84	1.9	2.07	2.07	2.06	2.1	2.31	2.31	2.30	2.3	2.57	2.57	2.57	2.6	2.88	2.88	2.88	2.9
	Amps	6.26	6.25	6.23	6.3	7.11	7.11	7.09	7.2	8.07	8.06	8.05	8.1	9.10	9.10	9.08	9.1	10.26	10.25	10.24	10.3	11.62	11.61	11.59	11.7
	Hi PR	261	262	264	267.9	300	302	303	307.7	342	343	345	349.5	387	388	390	394.4	436	437	438	442.8	487	488	490	494.5
	Lo PR	136	138	141	146.5	144	146	149	154.2	151	152	156	161.0	157	158	161	166.8	162	164	167	172.4	169	171	174	179.5

EXPANDED COOLING DATA — APHM53031 (HIGH STAGE)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
800	MBh	30.0	30.4	31.3	-	29.7	30.1	31.0	-	28.9	29.3	30.2	-	27.5	28.0	28.9	-	25.9	26.3	27.2	-	24.4	24.8	25.7	-	24.4	24.8	25.7	-	24.4	24.8	25.7	-				
	S/T	0.56	0.48	0.35	-	0.57	0.49	0.36	-	0.59	0.52	0.38	-	0.61	0.54	0.40	-	1.00	0.56	0.42	-	1.00	0.61	0.47	-	1.00	0.61	0.47	-	1.00	0.61	0.47	-				
	ΔT	19.11	17.40	14.19	-	19.06	17.35	14.15	-	19.31	17.59	14.39	-	19.05	17.33	14.13	-	18.82	17.10	13.90	-	19.89	18.18	14.97	-	19.89	18.18	14.97	-	19.89	18.18	14.97	-				
	kW	1.97	1.97	1.97	-	2.22	2.22	2.22	-	2.50	2.50	2.49	-	2.80	2.80	2.80	-	3.14	3.14	3.13	-	3.53	3.53	3.53	-	3.53	3.53	3.53	-	3.53	3.53	3.53	-				
	Amps	7.45	7.45	7.43	-	8.54	8.53	8.51	-	9.75	9.74	9.72	-	11.05	11.05	11.03	-	12.52	12.51	12.49	-	14.23	14.22	14.20	-	14.23	14.22	14.20	-	14.23	14.22	14.20	-				
	Hi PR	255	257	258	-	296	297	299	-	338	339	341	-	384	385	387	-	433	434	436	-	486	487	489	-	486	487	489	-	486	487	489	-				
Lo PR	123	125	128	-	131	132	135	-	137	139	142	-	143	144	148	-	148	150	153	-	155	157	160	-	155	157	160	-	155	157	160	-					
980	MBh	30.5	30.9	31.8	-	30.2	30.7	31.6	-	29.5	29.9	30.8	-	28.1	28.5	29.4	-	26.4	26.9	27.8	-	24.9	25.4	26.3	-	24.9	25.4	26.3	-	24.9	25.4	26.3	-				
	S/T	0.66	0.58	0.45	-	0.66	0.59	0.45	-	0.69	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.71	0.57	-	1.00	0.71	0.57	-	1.00	0.71	0.57	-				
	ΔT	17.50	15.79	12.59	-	17.46	15.74	12.54	-	17.70	15.98	12.78	-	17.44	15.73	12.52	-	17.21	15.50	12.30	-	18.28	16.57	13.37	-	18.28	16.57	13.37	-	18.28	16.57	13.37	-				
	kW	1.99	1.99	1.99	-	2.24	2.24	2.24	-	2.52	2.52	2.51	-	2.82	2.82	2.82	-	3.16	3.16	3.15	-	3.55	3.55	3.55	-	3.55	3.55	3.55	-	3.55	3.55	3.55	-				
	Amps	7.54	7.53	7.51	-	8.62	8.62	8.60	-	9.83	9.82	9.81	-	11.14	11.13	11.11	-	12.60	12.59	12.58	-	14.32	14.31	14.29	-	14.32	14.31	14.29	-	14.32	14.31	14.29	-				
	Hi PR	259	260	262	-	299	300	302	-	342	343	344	-	387	388	390	-	436	438	439	-	489	490	492	-	489	490	492	-	489	490	492	-				
Lo PR	126	127	130	-	133	135	138	-	140	141	145	-	145	147	150	-	151	152	156	-	158	159	163	-	158	159	163	-	158	159	163	-					
1200	MBh	31.4	31.9	32.8	-	31.2	31.6	32.5	-	30.4	30.8	31.7	-	29.0	29.4	30.3	-	27.4	27.8	28.7	-	25.9	26.3	27.2	-	25.9	26.3	27.2	-	25.9	26.3	27.2	-				
	S/T	0.70	0.63	0.49	-	0.71	0.63	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.75	0.62	-	1.00	0.75	0.62	-	1.00	0.75	0.62	-				
	ΔT	16.01	14.30	11.10	-	15.96	14.25	11.05	-	16.21	14.49	11.29	-	15.95	14.23	11.03	-	15.72	14.00	10.80	-	16.79	15.08	11.88	-	16.79	15.08	11.88	-	16.79	15.08	11.88	-				
	kW	2.01	2.01	2.01	-	2.26	2.26	2.25	-	2.54	2.54	2.53	-	2.84	2.84	2.83	-	3.18	3.17	3.17	-	3.57	3.57	3.56	-	3.57	3.57	3.56	-	3.57	3.57	3.56	-				
	Amps	7.62	7.61	7.59	-	8.70	8.70	8.68	-	9.91	9.90	9.89	-	11.22	11.21	11.19	-	12.68	12.67	12.66	-	14.40	14.39	14.37	-	14.40	14.39	14.37	-	14.40	14.39	14.37	-				
	Hi PR	263	264	265	-	303	304	306	-	345	347	348	-	391	392	394	-	440	441	443	-	493	494	496	-	493	494	496	-	493	494	496	-				
Lo PR	130	131	134	-	137	139	142	-	144	145	148	-	149	151	154	-	155	156	159	-	162	163	166	-	162	163	166	-	162	163	166	-					

75	800	MBh	30.0	30.4	31.3	32.7	29.7	30.1	31.0	32.4	28.9	29.3	30.2	31.6	27.6	28.0	28.9	30.3	25.9	26.3	27.2	28.6	24.4	24.8	25.7	27.1
		S/T	0.69	0.61	0.48	0.3	0.69	0.62	0.48	0.3	1.00	0.64	0.51	0.4	1.00	0.66	0.53	0.4	1.00	0.68	0.55	0.4	1.00	1.00	0.60	0.5
		ΔT	22.88	21.17	17.96	14.6	22.83	21.12	17.92	14.6	23.08	21.36	18.16	14.8	22.82	21.10	17.90	14.6	22.59	20.87	17.67	14.4	23.66	21.95	18.74	15.4
		kW	1.97	1.97	1.97	2.0	2.22	2.22	2.21	2.2	2.50	2.50	2.49	2.5	2.80	2.80	2.79	2.8	3.14	3.13	3.13	3.1	3.53	3.53	3.52	3.5
		Amps	7.45	7.44	7.42	7.5	8.53	8.52	8.50	8.6	9.74	9.73	9.71	9.8	11.05	11.04	11.02	11.1	12.51	12.50	12.48	12.6	14.22	14.21	14.20	14.3
		Hi PR	256	257	259	263.0	296	297	299	303.5	339	340	341	345.9	384	385	387	391.6	433	435	436	440.8	486	487	489	493.3
	Lo PR	123	125	128	133.1	131	132	135	140.6	137	139	142	147.2	143	144	148	152.8	148	150	153	158.3	155	157	160	165.2	
	980	MBh	30.5	31.0	31.9	33.2	30.3	30.7	31.6	33.0	29.5	29.9	30.8	32.2	28.1	28.5	29.4	30.8	26.5	26.9	27.8	29.2	25.0	25.4	26.3	27.7
		S/T	0.79	0.71	0.58	0.4	1.00	0.72	0.58	0.4	1.00	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	1.00	0.70	0.6
		ΔT	21.27	19.56	16.36	13.0	21.23	19.51	16.31	13.0	21.47	19.75	16.55	13.2	21.21	19.50	16.29	13.0	20.98	19.27	16.07	12.7	22.05	20.34	17.14	13.8
kW		1.99	1.99	1.99	2.0	2.24	2.24	2.23	2.3	2.52	2.52	2.51	2.5	2.82	2.82	2.81	2.8	3.16	3.15	3.15	3.2	3.55	3.55	3.54	3.6	
Amps		7.53	7.53	7.51	7.6	8.62	8.61	8.59	8.7	9.83	9.82	9.80	9.9	11.13	11.13	11.11	11.2	12.60	12.59	12.57	12.7	14.31	14.30	14.28	14.4	
Hi PR		259	260	262	266.3	299	301	302	306.8	342	343	345	349.2	387	389	390	394.8	437	438	440	444.1	489	490	492	496.6	
Lo PR	126	127	130	135.7	133	135	138	143.3	140	141	145	149.9	146	147	150	155.5	151	153	156	160.9	158	159	163	167.8		
1200	MBh	31.4	31.9	32.8	34.1	31.2	31.6	32.5	33.9	30.4	30.8	31.7	33.1	29.0	29.5	30.4	31.7	27.4	27.8	28.7	30.1	25.9	26.3	27.2	28.6	
	S/T	0.83	0.75	0.62	0.5	1.00	0.76	0.63	0.5	1.00	0.79	0.65	0.5	1.00	0.80	0.67	0.5	1.00	1.00	0.69	0.6	1.00	1.00	0.74	0.6	
	ΔT	19.78	18.07	14.87	11.5	19.73	18.02	14.82	11.5	19.98	18.26	15.06	11.7	19.72	18.00	14.80	11.5	19.49	17.77	14.57	11.3	20.56	18.85	15.65	12.3	
	kW	2.01	2.01	2.00	2.0	2.26	2.26	2.25	2.3	2.54	2.54	2.53	2.6	2.84	2.84	2.83	2.9	3.17	3.17	3.17	3.2	3.57	3.57	3.56	3.6	
	Amps	7.61	7.61	7.59	7.7	8.70	8.69	8.67	8.8	9.91	9.90	9.88	10.0	11.21	11.21	11.19	11.3	12.68	12.67	12.65	12.7	14.39	14.38	14.36	14.4	
	Hi PR	263	264	266	270.1	303	304	306	310.6	346	347	349	353.0	391	392	394	398.7	441	442	443	447.9	493	494	496	500.4	
Lo PR	130	131	134	139.6	137	139	142	147.1	144	145	148	153.7	149	151	154	159.3	155	156	159	164.8	162	163	166	171.6		

		Outdoor Ambient Temperature																													
		65°F					75°F					85°F					95°F					105°F					115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
800	MBh	30.1	30.6	31.4	32.8	29.9	30.3	31.2	32.6	29.1	29.5	30.4	31.8	27.7	28.1	29.0	30.4	26.1	26.5	27.4	28.8	24.6	25.0	25.9	27.3	24.6	25.0	25.9	27.3		
	S/T	1.00	0.74	0.60	0.5	1.00	0.74	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.73	0.6	1.00	1.00	0.73	0.6		
	ΔT	26.68	24.96	21.76	18.4	26.63	24.92	21.71	18.4	26.87	25.16	21.95	18.6	26.61	24.90	21.70	18.4	26.38	24.67	21.47	18.2	27.46	25.74	22.54	19.2	27.46	25.74	22.54	19.2		
	kW	1.97	1.97	1.97	2.0	2.22	2.22	2.22	2.2	2.50	2.50	2.49	2.5	2.80	2.80	2.79	2.8	3.14	3.14	3.13	3.2	3.53	3.53	3.53	3.5	3.53	3.53	3.53	3.5		
	Amps	7.45	7.44	7.43	7.5	8.54	8.53	8.51	8.6	9.74	9.74	9.72	9.8	11.05	11.04	11.03	11.1	12.51	12.51	12.49	12.6	14.23	14.22	14.20	14.3	14.23	14.22	14.20	14.3		
	Hi PR	256	257	259	263.5	297	298	300	304.0	339	340	342	346.4	385	386	388	392.0	434	435	437	441.3	486	488	489	493.8	486	488	489	493.8		
980	Lo PR	124	125	128	133.6	131	133	136	141.2	138	139	143	147.8	143	145	148	153.4	149	150	154	158.9	156	157	160	165.7	156	157	160	165.7		
	MBh	30.7	31.1	32.0	33.4	30.4	30.8	31.7	33.1	29.6	30.1	31.0	32.3	28.3	28.7	29.6	31.0	26.6	27.0	27.9	29.3	25.1	25.5	26.4	27.8	25.1	25.5	26.4	27.8		
	S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.82	0.7		
	ΔT	25.07	23.36	20.15	16.8	25.02	23.31	20.11	16.8	25.26	23.55	20.35	17.0	25.01	23.29	20.09	16.8	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6	25.85	24.14	20.93	17.6		
	kW	1.99	1.99	1.99	2.0	2.24	2.24	2.24	2.3	2.52	2.52	2.51	2.5	2.82	2.82	2.81	2.8	3.16	3.16	3.15	3.2	3.55	3.55	3.55	3.6	3.55	3.55	3.55	3.6		
	Amps	7.54	7.53	7.51	7.6	8.62	8.61	8.60	8.7	9.83	9.82	9.80	9.9	11.14	11.13	11.11	11.2	12.60	12.59	12.57	12.7	14.32	14.31	14.29	14.4	14.32	14.31	14.29	14.4		
1200	Hi PR	259	260	262	266.8	300	301	303	307.2	342	343	345	349.7	388	389	391	395.3	437	438	440	444.5	490	491	493	497.1	490	491	493	497.1		
	Lo PR	126	128	131	136.3	134	135	139	143.8	140	142	145	150.4	146	148	151	156.0	152	153	156	161.5	158	160	163	168.4	158	160	163	168.4		
	MBh	31.6	32.0	32.9	34.3	31.3	31.8	32.7	34.0	30.5	31.0	31.9	33.2	29.2	29.6	30.5	31.9	27.5	28.0	28.9	30.2	26.0	26.5	27.4	28.7	26.0	26.5	27.4	28.7		
	S/T	1.00	0.88	0.74	0.6	1.00	0.88	0.75	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7		
	ΔT	23.58	21.86	18.66	15.3	23.53	21.82	18.61	15.3	23.77	22.06	18.86	15.5	23.51	21.80	18.60	15.3	23.28	21.57	18.37	15.1	24.36	22.64	19.44	16.1	24.36	22.64	19.44	16.1		
	kW	2.01	2.01	2.01	2.0	2.26	2.26	2.25	2.3	2.54	2.54	2.53	2.6	2.84	2.84	2.83	2.9	3.18	3.17	3.17	3.2	3.57	3.57	3.56	3.6	3.57	3.57	3.56	3.6		
85	Amps	7.62	7.61	7.59	7.7	8.70	8.69	8.68	8.8	9.91	9.90	9.89	10.0	11.22	11.21	11.19	11.3	12.68	12.67	12.65	12.7	14.40	14.39	14.37	14.5	14.40	14.39	14.37	14.5		
	Hi PR	263	264	266	270.6	304	305	307	311.1	346	347	349	353.5	392	393	395	399.1	441	442	444	448.4	494	495	496	500.9	494	495	496	500.9		
	Lo PR	130	132	135	140.1	138	139	142	147.6	144	146	149	154.3	150	151	155	159.8	155	157	160	165.3	162	164	167	172.2	162	164	167	172.2		

800	MBh	30.6	31.1	32.0	33.3	30.4	30.8	31.7	33.1	29.6	30.0	30.9	32.3	28.2	28.6	29.5	30.9	26.6	27.0	27.9	29.3	25.1	25.5	26.4	27.8	25.1	25.5	26.4	27.8
	S/T	1.00	0.84	0.70	0.6	1.00	0.84	0.71	0.6	1.00	1.00	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.73	0.6	1.00	1.00	0.73	0.6
	ΔT	30.04	28.33	25.13	21.8	30.00	28.28	25.08	21.8	30.24	28.52	25.32	22.0	29.98	28.26	25.06	21.7	29.75	28.03	24.83	21.5	30.82	29.11	25.91	22.6	30.82	29.11	25.91	22.6
	kW	1.98	1.98	1.97	2.0	2.23	2.22	2.22	2.2	2.50	2.50	2.50	2.5	2.81	2.80	2.80	2.8	3.14	3.14	3.14	3.2	3.54	3.53	3.53	3.5	3.54	3.53	3.53	3.5
	Amps	7.47	7.46	7.45	7.5	8.56	8.55	8.53	8.6	9.77	9.76	9.74	9.8	11.07	11.06	11.05	11.1	12.53	12.53	12.51	12.6	14.25	14.24	14.22	14.3	14.25	14.24	14.22	14.3
	Hi PR	257	258	260	264.7	298	299	301	305.2	340	341	343	347.6	386	387	389	393.2	435	436	438	442.5	488	489	491	495.0	488	489	491	495.0
980	Lo PR	126	127	130	135.5	133	135	138	143.0	140	141	144	149.6	145	147	150	155.2	151	152	155	160.7	158	159	162	167.6	158	159	162	167.6
	MBh	31.2	31.6	32.5	33.9	30.9	31.3	32.2	33.6	30.1	30.6	31.5	32.8	28.8	29.2	30.1	31.5	27.1	27.6	28.5	29.8	25.6	26.0	26.9	28.3	25.6	26.0	26.9	28.3
	S/T	1.00	0.93	0.80	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.8	1.00	1.00	0.8	1.00	0.8
	ΔT	28.44	26.72	23.52	20.2	28.39	26.68	23.47	20.2	28.63	26.92	23.71	20.4	28.37	26.66	23.46	20.1	28.14	26.43	23.23	19.9	29.22	27.50	24.30	21.0	29.22	27.50	24.30	21.0
	kW	2.00	2.00	1.99	2.0	2.25	2.25	2.24	2.3	2.53	2.52	2.52	2.5	2.83	2.82	2.82	2.8	3.16	3.16	3.16	3.2	3.56	3.55	3.55	3.6	3.56	3.55	3.55	3.6
	Amps	7.56	7.55	7.53	7.6	8.64	8.63	8.62	8.7	9.85	9.84	9.83	9.9	11.16	11.15	11.13	11.2	12.62	12.61	12.60	12.7	14.34	14.33	14.31	14.4	14.34	14.33	14.31	14.4
1200	Hi PR	261	262	264	268.0	301	302	304	308.5	343	345	346	350.9	389	390	392	396.5	438	439	441	445.8	491	492	494	498.3	491	492	494	498.3
	Lo PR	128	130	133	138.1	136	137	140	145.7	142	144	147	152.3	148	149	153	157.9	153	155	158	163.4	160	162	165	170.2	160	162	165	170.2
	MBh	32.1	32.5	33.4	34.8	31.8	32.3	33.2	34.5	31.1	31.5	32.4	33.8	29.7	30.1	31.0	32.4	28.0	28.5	29.4	30.7	26.5	27.0	27.9	29.2	26.5	27.0	27.9	29.2
	S/T	1.00	0.98	0.84	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.89	0.8	1.00	1.00	0.90	0.8	1.00	1.00	0.8	1.00	1.00	0.8	1.00	0.8
	ΔT	26.94	25.23	22.03	18.7	26.90	25.18	21.98	18.7	27.14	25.42	22.22	18.9	26.88	25.16	21.96	18.6	26.65	24.94	21.73	18.4	27.72	26.01	22.81	19.5	27.72	26.01	22.81	19.5
	kW	2.02	2.01	2.01	2.0	2.27	2.26	2.26	2.3	2.54	2.54	2.54	2.6	2.84	2.84	2.84	2.9	3.18	3.18	3.17	3.2	3.57	3.57	3.57	3.6	3.57	3.57	3.57	3.6
85	Amps	7.64	7.63	7.61	7.7	8.72	8.72	8.70	8.8	9.93	9.92	9.91	10.0	11.24	11.23	11.21	11.3	12.70	12.69	12.68	12.8	14.42	14.41	14.39	14.5	14.42	14.41	14.39	14.5
	Hi PR	264	266	267	271.8	305	306	308	312.3	347	348	350	354.7	393	394	396	400.4	442	443	445	449.6	495	496	498	502.1	495	496	498	502.1
	Lo PR	132	134	137	142.0	140	141	144	149.5	146	148	151	156.1	152	153	156	161.7	157	159	162	167.2	164	166	169	174.0	164	166	169	174.0

IDB: Entering Indoor Dry Bulb Temperature

		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		AIRFLOW																								
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	500	MBh	21.4	21.7	22.3	-	21.2	21.5	22.1	-	20.6	20.9	21.6	-	19.7	20.0	20.6	-	18.5	18.8	19.4	-	17.4	17.7	18.3	-
		S/T	0.51	0.43	0.29	-	0.51	0.44	0.30	-	0.54	0.46	0.32	-	1.00	0.48	0.34	-	1.00	0.50	0.37	-	1.00	0.56	0.42	-
		ΔT	19.32	17.67	14.58	-	19.28	17.62	14.53	-	19.51	17.86	14.77	-	19.26	17.61	14.52	-	19.04	17.39	14.30	-	20.08	18.42	15.33	-
		kW	1.23	1.23	1.23	-	1.39	1.39	1.39	-	1.57	1.56	1.56	-	1.75	1.75	1.75	-	1.97	1.97	1.96	-	2.21	2.21	2.21	-
		Amps	4.66	4.65	4.64	-	5.34	5.33	5.32	-	6.10	6.09	6.08	-	6.92	6.92	6.90	-	7.84	7.84	7.82	-	8.92	8.91	8.90	-
		Hi PR	243	244	245	-	281	282	284	-	322	323	325	-	365	367	368	-	413	414	415	-	463	464	466	-
70	680	Lo PR	125	127	130	-	133	135	138	-	140	142	145	-	146	147	150	-	151	153	156	-	158	160	163	-
		MBh	21.9	22.2	22.9	-	21.7	22.0	22.7	-	21.2	21.5	22.1	-	20.2	20.5	21.2	-	19.0	19.3	20.0	-	17.9	18.2	18.9	-
		S/T	0.68	0.60	0.46	-	0.68	0.60	0.47	-	1.00	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.67	0.53	-	1.00	1.00	0.59	-
		ΔT	16.89	15.24	12.15	-	16.85	15.19	12.10	-	17.08	15.42	12.34	-	16.83	15.18	12.09	-	16.61	14.95	11.86	-	17.64	15.99	12.90	-
		kW	1.25	1.25	1.25	-	1.41	1.41	1.41	-	1.59	1.58	1.58	-	1.77	1.77	1.77	-	1.99	1.98	1.98	-	2.23	2.23	2.23	-
		Amps	4.74	4.74	4.73	-	5.42	5.42	5.41	-	6.18	6.18	6.17	-	7.01	7.00	6.99	-	7.93	7.92	7.91	-	9.01	9.00	8.99	-
70	800	Hi PR	247	248	250	-	286	287	289	-	327	328	329	-	370	371	373	-	417	418	420	-	467	469	470	-
		Lo PR	129	131	134	-	137	139	142	-	144	145	149	-	150	151	154	-	155	157	160	-	162	164	167	-
		MBh	22.4	22.7	23.4	-	22.2	22.6	23.2	-	21.7	22.0	22.6	-	20.7	21.0	21.7	-	19.5	19.8	20.5	-	18.4	18.7	19.4	-
		S/T	0.72	0.64	0.50	-	0.72	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.71	0.58	-	1.00	1.00	0.63	-
		ΔT	15.73	14.08	10.99	-	15.69	14.03	10.95	-	15.92	14.27	11.18	-	15.67	14.02	10.93	-	15.45	13.80	10.71	-	16.49	14.83	11.74	-
		kW	1.26	1.26	1.26	-	1.42	1.42	1.42	-	1.59	1.59	1.59	-	1.78	1.78	1.78	-	2.00	1.99	1.99	-	2.24	2.24	2.24	-
800	Amps	4.78	4.78	4.77	-	5.47	5.46	5.45	-	6.23	6.22	6.21	-	7.05	7.04	7.03	-	7.97	7.96	7.95	-	9.05	9.04	9.03	-	
	Hi PR	250	251	253	-	289	290	292	-	329	330	332	-	373	374	376	-	420	421	423	-	470	471	473	-	
	Lo PR	132	134	137	-	140	142	145	-	147	148	152	-	153	154	157	-	158	160	163	-	165	167	170	-	

75	500	MBh	21.4	21.7	22.4	23.3	21.2	21.5	22.2	23.1	20.6	20.9	21.6	22.6	19.7	20.0	20.6	21.6	18.5	18.8	19.4	20.4	17.4	17.7	18.3	19.3
		S/T	0.64	0.56	0.42	0.3	1.00	0.57	0.43	0.3	1.00	0.59	0.45	0.3	1.00	0.61	0.47	0.3	1.00	0.63	0.50	0.4	1.00	1.00	0.55	0.4
		ΔT	22.96	21.31	18.22	15.0	22.92	21.26	18.17	15.0	23.15	21.49	18.40	15.2	22.90	21.24	18.15	15.0	22.68	21.02	17.93	14.7	23.71	22.06	18.97	15.8
		kW	1.23	1.23	1.23	1.2	1.39	1.39	1.39	1.4	1.56	1.56	1.56	1.6	1.75	1.75	1.75	1.8	1.97	1.96	1.96	2.0	2.21	2.21	2.21	2.2
		Amps	4.65	4.65	4.64	4.7	5.33	5.33	5.32	5.4	6.09	6.09	6.08	6.1	6.92	6.91	6.90	7.0	7.84	7.83	7.82	7.9	8.92	8.91	8.90	9.0
		Hi PR	243	244	246	249.9	282	283	284	288.6	322	323	325	329.1	366	367	368	372.8	413	414	416	419.8	463	464	466	470.1
75	680	Lo PR	125	127	130	135.7	133	135	138	143.4	140	142	145	150.2	146	147	151	155.9	151	153	156	161.6	158	160	163	168.6
		MBh	21.9	22.3	22.9	23.9	21.8	22.1	22.7	23.7	21.2	21.5	22.1	23.1	20.2	20.5	21.2	22.2	19.0	19.3	20.0	21.0	17.9	18.2	18.9	19.9
		S/T	0.81	0.73	0.59	0.4	1.00	0.74	0.60	0.5	1.00	0.76	0.62	0.5	1.00	0.78	0.64	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.72	0.6
		ΔT	20.53	18.88	15.79	12.6	20.48	18.83	15.74	12.5	20.72	19.06	15.97	12.8	20.47	18.81	15.72	12.5	20.25	18.59	15.50	12.3	21.28	19.63	16.54	13.3
		kW	1.25	1.25	1.25	1.3	1.41	1.41	1.41	1.4	1.58	1.58	1.58	1.6	1.77	1.77	1.77	1.8	1.99	1.98	1.98	2.0	2.23	2.23	2.23	2.2
		Amps	4.74	4.73	4.72	4.8	5.42	5.41	5.40	5.5	6.18	6.18	6.16	6.2	7.00	7.00	6.99	7.0	7.92	7.92	7.91	8.0	9.00	9.00	8.98	9.0
75	800	Hi PR	248	249	250	254.6	286	287	289	293.3	327	328	330	333.8	370	371	373	377.5	417	419	420	424.5	468	469	470	474.8
		Lo PR	129	131	134	139.5	137	139	142	147.3	144	145	149	154.1	150	151	154	159.8	155	157	160	165.5	162	164	167	172.5
		MBh	22.5	22.8	23.4	24.4	22.3	22.6	23.2	24.2	21.7	22.0	22.6	23.6	20.7	21.0	21.7	22.7	19.5	19.8	20.5	21.5	18.4	18.8	19.4	20.4
		S/T	0.85	0.77	0.63	0.5	1.00	0.78	0.64	0.5	1.00	0.80	0.67	0.5	1.00	0.82	0.69	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.76	0.6
		ΔT	19.37	17.72	14.63	11.4	19.33	17.67	14.58	11.4	19.56	17.91	14.82	11.6	19.31	17.66	14.57	11.4	19.09	17.43	14.35	11.1	20.13	18.47	15.38	12.2
		kW	1.26	1.26	1.26	1.3	1.42	1.42	1.41	1.4	1.59	1.59	1.59	1.6	1.78	1.78	1.78	1.8	1.99	1.99	1.99	2.0	2.24	2.24	2.24	2.3
800	Amps	4.78	4.77	4.76	4.8	5.46	5.46	5.44	5.5	6.22	6.22	6.20	6.3	7.04	7.04	7.03	7.1	7.96	7.96	7.95	8.0	9.04	9.04	9.02	9.1	
	Hi PR	250	251	253	257.4	289	290	292	296.1	330	331	332	336.7	373	374	376	380.3	420	421	423	427.4	471	472	473	477.6	
	Lo PR	132	134	137	142.6	140	142	145	150.3	147	148	152	157.1	153	154	157	162.8	158	160	163	168.5	165	167	170	175.5	

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.
Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions.

kW = Total system power
Amps = outdoor unit amps (comp. + fan)

		OUTDOOR AMBIENT TEMPERATURE																											
		65°F				75°F				85°F				95°F				105°F				115°F							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	21.5	21.8	22.5	23.5	21.3	21.6	22.3	23.3	20.8	21.1	21.7	22.7	19.8	20.1	20.7	21.7	18.6	18.9	19.5	20.5	17.5	17.8	18.5	19.4	17.5	17.8	18.5	19.4
	S/T	1.00	0.69	0.55	0.4	1.00	0.69	0.56	0.4	1.00	0.72	0.58	0.4	1.00	1.00	0.60	0.5	1.00	1.00	0.62	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.68	0.5
	ΔT	26.62	24.97	21.88	18.7	26.58	24.92	21.83	18.6	26.81	25.16	22.07	18.9	26.56	24.91	21.82	18.6	26.34	24.69	21.60	18.4	27.38	25.72	22.63	19.4	27.38	25.72	22.63	19.4
	kW	1.23	1.23	1.23	1.2	1.39	1.39	1.39	1.4	1.57	1.56	1.56	1.6	1.75	1.75	1.75	1.8	1.97	1.96	1.96	2.0	2.21	2.21	2.21	2.2	2.21	2.21	2.21	2.2
	Amps	4.66	4.65	4.64	4.7	5.34	5.33	5.32	5.4	6.10	6.09	6.08	6.1	6.92	6.92	6.90	7.0	7.84	7.83	7.82	7.9	8.92	8.91	8.90	9.0	8.92	8.91	8.90	9.0
	Hi-PR	243	244	246	250.3	282	283	285	289.0	323	324	325	329.6	366	367	369	373.2	413	414	416	420.3	463	465	466	470.5	463	465	466	470.5
	Lo-PR	126	128	131	136.2	134	135	139	144.0	141	142	145	150.8	146	148	151	156.5	152	153	157	162.1	159	161	164	169.2	159	161	164	169.2
80	MBh	22.1	22.4	23.0	24.0	21.9	22.2	22.8	23.8	21.3	21.6	22.3	23.2	20.3	20.6	21.3	22.3	19.1	19.4	20.1	21.1	18.1	18.4	19.0	20.0	18.1	18.4	19.0	20.0
	S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.79	0.6
	ΔT	24.19	22.54	19.45	16.2	24.15	22.49	19.40	16.2	24.38	22.73	19.64	16.4	24.13	22.48	19.39	16.2	23.91	22.26	19.17	16.0	24.95	23.29	20.20	17.0	24.95	23.29	20.20	17.0
	kW	1.25	1.25	1.25	1.3	1.41	1.41	1.41	1.4	1.59	1.58	1.58	1.6	1.77	1.77	1.77	1.8	1.99	1.98	1.98	2.0	2.23	2.23	2.23	2.2	2.23	2.23	2.23	2.2
	Amps	4.74	4.74	4.73	4.8	5.42	5.42	5.41	5.5	6.18	6.18	6.17	6.2	7.01	7.00	6.99	7.0	7.93	7.92	7.91	8.0	9.00	9.00	8.99	9.0	9.00	9.00	8.99	9.0
	Hi-PR	248	249	251	255.0	287	288	289	293.7	327	328	330	334.3	371	372	374	377.9	418	419	421	425.0	468	469	471	475.2	468	469	471	475.2
	Lo-PR	130	131	135	140.1	138	139	142	147.9	144	146	149	154.6	150	152	155	160.4	156	157	161	166.0	163	164	168	173.1	163	164	168	173.1
800	MBh	22.6	22.9	23.5	24.5	22.4	22.7	23.3	24.3	21.8	22.1	22.8	23.7	20.8	21.1	21.8	22.8	19.6	19.9	20.6	21.6	18.6	18.9	19.5	20.5	18.6	18.9	19.5	20.5
	S/T	1.00	0.90	0.76	0.6	1.00	0.90	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7
	ΔT	23.04	21.38	18.29	15.1	22.99	21.34	18.25	15.0	23.22	21.57	18.48	15.3	22.97	21.32	18.23	15.0	22.75	21.10	18.01	14.8	23.79	22.13	19.04	15.8	23.79	22.13	19.04	15.8
	kW	1.26	1.26	1.26	1.3	1.42	1.42	1.42	1.4	1.59	1.59	1.59	1.6	1.78	1.78	1.78	1.8	2.00	1.99	1.99	2.0	2.24	2.24	2.24	2.3	2.24	2.24	2.24	2.3
	Amps	4.78	4.78	4.77	4.8	5.46	5.46	5.45	5.5	6.22	6.22	6.21	6.3	7.05	7.04	7.03	7.1	7.97	7.96	7.95	8.0	9.05	9.04	9.03	9.1	9.05	9.04	9.03	9.1
	Hi-PR	251	252	254	257.9	290	291	292	296.6	330	331	333	337.1	374	375	377	380.8	421	422	424	427.8	471	472	474	478.1	471	472	474	478.1
	Lo-PR	133	134	138	143.1	141	142	145	150.9	147	149	152	157.7	153	155	158	163.4	159	160	164	169.0	166	167	171	176.1	166	167	171	176.1
85	MBh	21.9	22.2	22.8	23.8	21.7	22.0	22.6	23.6	21.1	21.4	22.1	23.1	20.1	20.4	21.1	22.1	19.0	19.3	19.9	20.9	17.9	18.2	18.8	19.8	17.9	18.2	18.8	19.8
	S/T	1.00	0.79	0.65	0.5	1.00	1.00	0.66	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.62	0.6	1.00	1.00	0.68	0.6	1.00	1.00	0.68	0.6
	ΔT	29.87	28.22	25.13	21.9	29.83	28.17	25.08	21.9	30.06	28.41	25.32	22.1	29.81	28.16	25.07	21.9	29.59	27.93	24.85	21.6	30.63	28.97	25.88	22.7	30.63	28.97	25.88	22.7
	kW	1.24	1.24	1.23	1.2	1.39	1.39	1.39	1.4	1.57	1.57	1.56	1.6	1.76	1.76	1.75	1.8	1.97	1.97	1.97	2.0	2.22	2.22	2.21	2.2	2.22	2.22	2.21	2.2
	Amps	4.67	4.66	4.65	4.7	5.35	5.35	5.33	5.4	6.11	6.11	6.09	6.1	6.93	6.93	6.92	7.0	7.85	7.85	7.84	7.9	8.93	8.93	8.91	9.0	8.93	8.93	8.91	9.0
	Hi-PR	244	245	247	251.5	283	284	286	290.2	324	325	326	330.7	367	368	370	374.4	414	415	417	421.4	465	466	467	471.7	465	466	467	471.7
	Lo-PR	128	129	133	138.1	136	137	140	145.9	142	144	147	152.7	148	150	153	158.4	154	155	159	164.1	161	162	166	171.1	161	162	166	171.1
85	MBh	22.4	22.7	23.4	24.4	22.2	22.5	23.2	24.2	21.7	22.0	22.6	23.6	20.7	21.0	21.6	22.6	19.5	19.8	20.5	21.4	18.4	18.7	19.4	20.4	18.4	18.7	19.4	20.4
	S/T	1.00	0.96	0.82	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.80	0.8	1.00	1.00	0.80	0.8	1.00	1.00	0.80	0.8
	ΔT	27.44	25.79	22.70	19.5	27.40	25.74	22.65	19.5	27.63	25.97	22.88	19.7	27.38	25.72	22.64	19.4	27.16	25.50	22.41	19.2	28.19	26.54	23.45	20.2	28.19	26.54	23.45	20.2
	kW	1.26	1.26	1.25	1.3	1.41	1.41	1.41	1.4	1.59	1.59	1.58	1.6	1.78	1.78	1.77	1.8	1.99	1.99	1.99	2.0	2.24	2.24	2.23	2.2	2.24	2.24	2.23	2.2
	Amps	4.76	4.75	4.74	4.8	5.44	5.44	5.43	5.42	6.20	6.19	6.18	6.2	7.02	7.01	7.00	7.1	7.94	7.93	7.92	8.0	9.02	9.01	9.00	9.1	9.02	9.01	9.00	9.1
	Hi-PR	249	250	252	256.2	288	289	291	294.9	328	329	331	335.4	372	373	375	379.1	419	420	422	426.1	469	470	472	476.4	469	470	472	476.4
	Lo-PR	132	133	137	142.0	140	141	144	149.8	146	148	151	156.6	152	154	157	162.3	158	159	163	167.9	165	166	170	175.0	165	166	170	175.0
800	MBh	22.9	23.2	23.9	24.9	22.7	23.0	23.7	24.7	22.2	22.5	23.1	24.1	21.2	21.5	22.1	23.1	20.0	20.3	21.0	21.9	18.9	19.2	19.9	20.9	18.9	19.2	19.9	20.9
	S/T	1.00	1.00	0.86	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.8	1.00	1.00	0.90	0.8	1.00	1.00	0.80	0.8	1.00	1.00	0.80	0.8	1.00	1.00	0.80	0.8
	ΔT	26.28	24.63	21.54	18.3	26.24	24.58	21.49	18.3	26.47	24.82	21.73	18.5	26.22	24.57	21.48	18.3	26.00	24.35	21.26	18.1	27.04	25.38	22.29	19.1	27.04	25.38	22.29	19.1
	kW	1.27	1.26	1.26	1.3	1.42	1.42	1.42	1.4	1.60	1.60	1.59	1.6	1.79	1.79	1.78	1.8	2.00	2.00	1.99	2.0	2.25	2.25	2.24	2.3	2.25	2.25	2.24	2.3
	Amps	4.80	4.79	4.78	4.8	5.48	5.47	5.46	5.5	6.24	6.23	6.22	6.3	7.06															

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																105°F				115°F			
				65°F				75°F				85°F				95°F											
				ENTERING INDOOR WET BULB TEMPERATURE																							
70	1000	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
		S/T	36.5	37.0	38.1	-	36.2	36.7	37.8	-	35.2	35.7	36.8	-	33.6	34.1	35.2	-	31.5	32.1	33.2	-	29.7	30.2	31.3	-	
		ΔT	20.83	18.95	15.42	-	20.78	18.89	15.37	-	21.05	19.16	15.64	-	20.76	18.88	15.35	-	20.51	18.62	15.10	-	21.69	19.80	16.28	-	
		kW	2.42	2.42	2.42	-	2.72	2.72	2.71	-	3.05	3.05	3.04	-	3.41	3.41	3.40	-	3.81	3.81	3.80	-	4.28	4.28	4.27	-	
		Amps	9.00	8.99	8.96	-	10.28	10.27	10.25	-	11.72	11.71	11.69	-	13.28	13.27	13.25	-	15.02	15.01	14.99	-	17.06	17.05	17.03	-	
	1200	Hi PR	258	259	260	-	298	299	301	-	341	342	344	-	387	388	390	-	437	438	439	-	489	491	492	-	
		Lo PR	118	120	123	-	125	127	130	-	132	133	136	-	137	138	141	-	142	144	147	-	149	150	153	-	
		MBh	37.1	37.6	38.7	-	36.8	37.3	38.4	-	35.8	36.3	37.4	-	34.2	34.7	35.8	-	32.2	32.7	33.8	-	30.3	30.8	31.9	-	
		S/T	0.65	0.57	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.62	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	
		ΔT	19.26	17.37	13.85	-	19.20	17.32	13.80	-	19.47	17.58	14.06	-	19.18	17.30	13.78	-	18.93	17.05	13.52	-	20.11	18.23	14.71	-	
1400	kW	2.45	2.44	2.44	-	2.74	2.74	2.73	-	3.07	3.07	3.07	-	3.43	3.43	3.42	-	3.83	3.83	3.82	-	4.30	4.30	4.29	-		
	Amps	9.09	9.08	9.06	-	10.38	10.37	10.35	-	11.82	11.81	11.78	-	13.37	13.36	13.34	-	15.11	15.10	15.08	-	17.15	17.14	17.12	-		
	Hi PR	260	262	263	-	301	302	304	-	344	345	347	-	390	391	393	-	439	441	442	-	492	494	495	-		
	Lo PR	120	122	125	-	128	129	132	-	134	135	138	-	139	141	144	-	145	146	149	-	151	153	156	-		
	MBh	37.9	38.4	39.5	-	37.6	38.1	39.2	-	36.6	37.1	38.2	-	35.0	35.5	36.6	-	33.0	33.5	34.6	-	31.1	31.6	32.7	-		
75	1000	S/T	0.69	0.61	0.48	-	0.69	0.62	0.49	-	0.72	0.64	0.51	-	0.74	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.74	0.60	-	
		ΔT	18.00	16.12	12.60	-	17.95	16.07	12.54	-	18.22	16.33	12.81	-	17.93	16.05	12.52	-	17.68	15.79	12.27	-	18.86	16.97	13.45	-	
		kW	2.46	2.46	2.45	-	2.76	2.76	2.75	-	3.09	3.09	3.08	-	3.45	3.45	3.44	-	3.85	3.85	3.84	-	4.32	4.31	4.31	-	
		Amps	9.16	9.15	9.13	-	10.45	10.44	10.42	-	11.89	11.88	11.86	-	13.45	13.44	13.41	-	15.19	15.18	15.15	-	17.23	17.22	17.19	-	
		Hi PR	263	264	266	-	304	305	307	-	347	348	350	-	393	394	396	-	442	443	445	-	495	496	498	-	
	1200	Lo PR	123	125	128	-	130	132	135	-	137	138	141	-	142	143	146	-	147	149	152	-	154	155	158	-	
		MBh	37.1	37.6	38.7	40.4	36.8	37.3	38.4	40.1	35.8	36.4	37.5	39.1	34.2	34.7	35.8	37.5	32.2	32.7	33.8	35.5	30.4	30.9	32.0	33.6	
		S/T	0.77	0.70	0.57	0.4	0.78	0.71	0.57	0.4	1.00	0.73	0.60	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	0.82	0.69	0.6	
		ΔT	23.40	21.52	17.99	14.3	23.35	21.46	17.94	14.3	23.62	21.73	18.21	14.6	23.33	21.45	17.92	14.3	23.08	21.19	17.67	14.0	24.26	22.37	18.85	15.2	
		kW	2.44	2.44	2.44	2.5	2.74	2.74	2.73	2.8	3.07	3.07	3.06	3.1	3.43	3.43	3.42	3.4	3.83	3.83	3.82	3.8	4.30	4.30	4.29	4.3	
1400	Amps	9.08	9.07	9.05	9.1	10.37	10.36	10.34	10.4	11.81	11.80	11.78	11.9	13.36	13.35	13.33	13.4	15.10	15.09	15.07	15.2	17.14	17.13	17.11	17.2		
	Hi PR	261	262	264	268.2	301	303	304	308.9	344	345	347	351.6	390	391	393	397.6	440	441	443	447.2	493	494	496	500.1		
	Lo PR	120	122	125	130.0	128	129	132	137.2	134	135	138	143.5	139	141	144	148.9	145	146	149	154.1	151	153	156	160.7		
	MBh	37.9	38.4	39.5	41.2	37.6	38.1	39.2	40.9	36.6	37.2	38.3	39.9	35.0	35.5	36.6	38.3	33.0	33.5	34.6	36.3	31.1	31.7	32.8	34.4		
	S/T	0.81	0.74	0.61	0.5	0.82	0.75	0.61	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.73	0.6		
1400	ΔT	22.15	20.26	16.74	13.1	22.10	20.21	16.69	13.0	22.36	20.48	16.96	13.3	22.08	20.19	16.67	13.0	21.83	19.94	16.42	12.8	23.01	21.12	17.60	14.0		
	kW	2.46	2.46	2.45	2.5	2.76	2.75	2.75	2.8	3.09	3.09	3.08	3.1	3.45	3.44	3.44	3.5	3.85	3.84	3.84	3.9	4.31	4.31	4.31	4.3		
	Amps	9.15	9.14	9.12	9.2	10.44	10.43	10.41	10.5	11.88	11.87	11.85	11.9	13.44	13.43	13.41	13.5	15.18	15.17	15.14	15.2	17.22	17.21	17.19	17.3		
	Hi PR	264	265	266	271.0	304	305	307	311.8	347	348	350	354.5	393	394	396	400.4	443	444	446	450.0	495	497	498	502.9		
	Lo PR	123	125	128	132.6	130	132	135	139.8	137	138	141	146.2	142	143	146	151.5	147	149	152	156.8	154	155	158	163.3		
IDB: Entering Indoor Dry Bulb Temperature Shaded area reflects ACCA (TVIA) conditions. kW = Total system power Amps = outdoor unit amps (comp.+fan)																											

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1000	MBh	36.7	37.2	38.3	40.0	36.4	36.9	38.0	39.6	35.4	35.9	37.0	38.7	33.8	34.3	35.4	37.0	31.8	32.3	33.4	35.0	29.9	30.4	31.5	33.2	29.9	30.4	31.5	33.2							
		S/T	0.81	0.74	0.61	0.5	1.00	0.77	0.64	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.73	0.6	1.00	1.00	0.73	0.6							
		ΔT	29.15	27.27	23.75	20.1	29.10	27.22	23.70	20.0	29.37	27.48	23.96	20.3	29.08	27.20	23.68	20.0	28.83	26.95	23.42	19.8	30.01	28.13	24.61	21.0	30.01	28.13	24.61	21.0							
		kW	2.42	2.42	2.42	2.4	2.72	2.72	2.71	2.7	3.05	3.05	3.04	3.1	3.41	3.41	3.40	3.4	3.81	3.81	3.80	3.8	4.28	4.28	4.27	4.3	4.28	4.28	4.27	4.3							
		Amps	8.99	8.98	8.96	9.1	10.28	10.27	10.25	10.3	11.72	11.71	11.69	11.8	13.28	13.27	13.25	13.3	15.02	15.01	14.99	15.1	17.06	17.05	17.03	17.1	17.06	17.05	17.03	17.1							
		Hi PR	258	259	261	265.7	299	300	302	306.4	342	343	345	349.1	388	389	391	395.1	437	438	440	444.7	490	491	493	497.6	490	491	493	497.6							
80	1200	Lo PR	119	120	123	128.2	126	127	130	135.4	132	134	137	141.7	138	139	142	147.1	143	144	147	152.3	149	151	154	158.9	149	151	154	158.9							
		MBh	37.3	37.8	38.9	40.6	37.0	37.5	38.6	40.3	36.0	36.6	37.6	39.3	34.4	34.9	36.0	37.7	32.4	32.9	34.0	35.7	30.5	31.1	32.2	33.8	30.5	31.1	32.2	33.8							
		S/T	0.90	0.82	0.69	0.6	1.00	0.85	0.72	0.6	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.81	0.7							
		ΔT	27.58	25.69	22.17	18.5	27.53	25.64	22.12	18.5	27.79	25.90	22.38	18.7	27.51	25.62	22.10	18.5	27.25	25.37	21.85	18.2	28.44	26.55	23.03	19.4	28.44	26.55	23.03	19.4							
		kW	2.45	2.44	2.44	2.5	2.74	2.74	2.73	2.8	3.07	3.07	3.06	3.1	3.43	3.43	3.42	3.4	3.83	3.83	3.82	3.8	4.30	4.30	4.29	4.3	4.30	4.30	4.29	4.3							
		Amps	9.09	9.08	9.06	9.2	10.38	10.37	10.34	10.4	11.81	11.80	11.78	11.9	13.37	13.36	13.34	13.4	15.11	15.10	15.08	15.2	17.15	17.14	17.12	17.2	17.15	17.14	17.12	17.2							
1400	1400	Hi PR	261	262	264	268.6	302	303	305	309.4	345	346	348	352.1	391	392	394	398.1	440	441	443	447.6	493	494	496	500.5	493	494	496	500.5							
		Lo PR	121	122	125	130.5	128	130	133	137.7	135	136	139	144.1	142	144	147	149.4	145	147	150	154.6	152	153	156	161.2	152	153	156	161.2							
		MBh	38.1	38.6	39.7	41.4	37.8	38.3	39.4	41.1	36.8	37.3	38.4	40.1	35.2	35.7	36.8	38.5	33.2	33.7	34.8	36.5	31.3	31.9	32.9	34.6	31.3	31.9	32.9	34.6							
		S/T	1.00	0.86	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.6	1.00	0.91	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.85	0.7							
		ΔT	26.33	24.44	20.92	17.3	26.27	24.39	20.87	17.2	26.54	24.65	21.13	17.5	26.25	24.37	20.85	17.2	26.00	24.12	20.59	16.9	27.18	25.30	21.78	18.1	27.18	25.30	21.78	18.1							
		kW	2.46	2.46	2.45	2.5	2.76	2.76	2.75	2.8	3.09	3.09	3.08	3.1	3.45	3.44	3.44	3.5	3.85	3.84	3.84	3.9	4.32	4.31	4.31	4.3	4.32	4.31	4.31	4.3							
85	1000	Amps	9.16	9.15	9.13	9.2	10.45	10.44	10.42	10.5	11.89	11.88	11.86	12.0	13.44	13.43	13.41	13.5	15.18	15.17	15.15	15.2	17.22	17.21	17.19	17.3	17.22	17.21	17.19	17.3							
		Hi PR	264	265	267	271.5	305	306	308	312.2	347	349	350	354.9	393	395	396	400.9	443	444	446	450.5	496	497	499	503.4	496	497	499	503.4							
		Lo PR	124	125	128	133.1	131	132	135	140.4	137	139	142	146.7	142	144	147	152.0	148	149	152	157.3	154	156	159	163.8	154	156	159	163.8							
		MBh	37.3	37.8	38.9	40.6	37.0	37.5	38.6	40.3	36.0	36.5	37.6	39.3	34.4	34.9	36.0	37.7	32.4	32.9	34.0	35.7	30.5	31.1	32.1	33.8	30.5	31.1	32.1	33.8							
		S/T	1.00	0.84	0.70	0.6	1.00	0.84	0.71	0.6	1.00	0.87	0.74	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7							
		ΔT	32.86	30.97	27.45	23.8	32.81	30.92	27.40	23.8	33.07	31.19	27.66	24.0	32.79	30.90	27.38	23.7	32.54	30.65	27.13	23.5	33.72	31.83	28.31	24.7	33.72	31.83	28.31	24.7							
85	1200	kW	2.43	2.43	2.42	2.4	2.73	2.72	2.72	2.7	3.06	3.05	3.05	3.1	3.41	3.41	3.41	3.4	3.81	3.81	3.81	3.8	4.28	4.28	4.28	4.3	4.28	4.28	4.28	4.3							
		Amps	9.02	9.01	8.99	9.1	10.31	10.30	10.28	10.4	11.75	11.74	11.71	11.8	13.30	13.29	13.27	13.4	15.04	15.03	15.01	15.1	17.08	17.07	17.05	17.1	17.08	17.07	17.05	17.1							
		Hi PR	259	261	262	266.9	300	301	303	307.6	343	344	346	350.3	389	390	392	396.3	438	440	441	445.9	491	492	494	498.8	491	492	494	498.8							
		Lo PR	120	122	125	130.0	128	129	132	137.2	134	135	138	143.5	139	141	144	148.9	145	146	149	154.1	151	153	156	160.7	151	153	156	160.7							
		MBh	37.9	38.5	39.5	41.2	37.6	38.1	39.2	40.9	36.7	37.2	38.3	39.9	35.0	35.5	36.6	38.3	33.0	33.5	34.6	36.3	31.2	31.7	32.8	34.4	31.2	31.7	32.8	34.4							
		S/T	1.00	0.92	0.79	0.7	1.00	0.93	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.91	0.8	1.00	1.00	0.91	0.8							
85	1400	ΔT	31.28	29.39	25.87	22.2	31.23	29.34	25.82	22.2	31.49	29.61	26.09	22.4	31.21	29.32	25.80	22.2	30.96	29.07	25.55	21.9	32.14	30.25	26.73	23.1	32.14	30.25	26.73	23.1							
		kW	2.45	2.45	2.44	2.5	2.75	2.74	2.74	2.8	3.08	3.08	3.07	3.1	3.44	3.43	3.43	3.5	3.84	3.83	3.83	3.9	4.31	4.30	4.30	4.3	4.31	4.30	4.30	4.3							
		Amps	9.11	9.10	9.08	9.2	10.40	10.39	10.37	10.5	11.84	11.83	11.81	11.9	13.40	13.39	13.36	13.5	15.14	15.12	15.10	15.2	17.18	17.17	17.14	17.2	17.18	17.17	17.14	17.2							
		Hi PR	262	264	265	269.8	303	304	306	310.6	346	347	349	353.3	392	393	395	399.3	441	443	444	448.9	494	495	497	501.8	494	495	497	501.8							
		Lo PR	123	124	127	132.3	130	131	134	139.5	136	138	141	145.8	142	143	146	151.2	147	148	151	156.4	153	155	158	163.0	153	155	158	163.0							
		MBh	38.7	39.2	40.3	42.0	38.4	38.9	40.0	41.7	37.4	38.0	39.1	40.7	35.8	36.3	37.4	39.1	33.8	34.3	35.4	37.1	32.0	32.5	33.6	35.2	32.0	32.5	33.6	35.2							
1400	1400	S/T	1.00	0.96	0.83	0.7	1.00	0.97	0.83	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.90	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8							
		ΔT	30.03	28.14	24.62	21.0	29.98	28.09	24.57	20.9	30.24	28.36	24.83	21.2	29.96	28.07	24.55	20.9	29.71	27.82	24.30	20.6	30.89	29.00	25.48	21.8	30.89	29.00	25.48	21.8							
		kW	2.47	2.47	2.46	2.5	2.76	2.76	2.76	2.8	3.09	3.09	3.09	3.1	3.45	3.45	3.45	3.5	3.85	3.85	3.85	3.9	4.32	4.32	4.31	4.3	4.32	4.32	4.31	4.3							
		Amps	9.19	9.17	9.15	9.3	10.47	10.46	10.44	10.5	11.91	11.90	11.88	12.0	13.47	13.46	13.44	13.5	15.21	15.20	15.18	15.3	17.25	17.24	17.22	17.3	17.25	17.24	17.22	17.3							
		Hi PR	265	266	268	272.7	306	307	309	313.4	349	350	352	356.1	395	396	398	402.1	444	445	447	451.7	497	498	500	504.6	497	498	500	504.6							
		Lo PR	125	127	130	134.9	133	134	137	142.1	139	140	143	148.5	144	146	149	153.8	150	151	154	159.1	156	158	161	165.6	156	158	161	165.6							
IDB: Entering Indoor Dry Bulb Temperature		Shaded area reflects AHRI conditions.																		kW = Total system power																	
High and low pressures are measured at the liquid and suction access fittings.		Amps = outdoor unit amps (comp.+fan)																																			

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	26.3	26.6	27.4	-	26.0	26.4	27.2	-	25.3	25.7	26.5	-	24.2	24.5	25.3	-	22.7	23.1	23.9	-	21.4	21.8	22.6	-	21.4	21.8	22.6	-	21.4	21.8	22.6	-				
	S/T	0.59	0.51	0.38	-	0.60	0.52	0.38	-	0.62	0.55	0.41	-	0.64	0.56	0.43	-	1.00	0.59	0.45	-	1.00	0.64	0.50	-	1.00	0.64	0.50	-	1.00	0.64	0.50	-				
	ΔT	19.95	18.13	14.73	-	19.90	18.08	14.68	-	20.15	18.33	14.93	-	19.88	18.06	14.66	-	19.63	17.81	14.42	-	20.77	18.95	15.56	-	20.77	18.95	15.56	-	20.77	18.95	15.56	-				
	kW	1.53	1.52	1.52	-	1.71	1.71	1.71	-	1.92	1.92	1.92	-	2.15	2.14	2.14	-	2.40	2.40	2.39	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-	2.69	2.69	2.69	-				
	Amps	5.66	5.66	5.64	-	6.48	6.47	6.46	-	7.38	7.37	7.36	-	8.36	8.35	8.34	-	9.45	9.45	9.43	-	10.74	10.73	10.72	-	10.74	10.73	10.72	-	10.74	10.73	10.72	-				
	Hi PR	246	248	249	-	285	286	288	-	326	327	329	-	370	371	373	-	418	419	420	-	468	469	471	-	468	469	471	-	468	469	471	-				
825	Lo PR	122	123	126	-	129	131	134	-	136	137	140	-	141	143	146	-	146	148	151	-	153	155	158	-	153	155	158	-	153	155	158	-				
	MBh	26.7	27.1	27.8	-	26.4	26.8	27.6	-	25.8	26.1	26.9	-	24.6	24.9	25.7	-	23.1	23.5	24.3	-	21.8	22.2	23.0	-	21.8	22.2	23.0	-	21.8	22.2	23.0	-				
	S/T	0.67	0.59	0.45	-	0.67	0.60	0.46	-	0.70	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-				
	ΔT	18.58	16.76	13.36	-	18.53	16.71	13.31	-	18.79	16.97	13.57	-	18.51	16.69	13.29	-	18.27	16.45	13.05	-	19.41	17.59	14.19	-	19.41	17.59	14.19	-	19.41	17.59	14.19	-				
	kW	1.54	1.54	1.53	-	1.72	1.72	1.72	-	1.93	1.93	1.93	-	2.16	2.16	2.15	-	2.41	2.41	2.40	-	2.70	2.70	2.70	-	2.70	2.70	2.70	-	2.70	2.70	2.70	-				
	Amps	5.72	5.71	5.70	-	6.53	6.52	6.51	-	7.43	7.43	7.41	-	8.41	8.41	8.39	-	9.51	9.50	9.49	-	10.79	10.78	10.77	-	10.79	10.78	10.77	-	10.79	10.78	10.77	-				
1000	Hi PR	249	250	252	-	288	289	291	-	329	330	332	-	373	374	376	-	420	421	423	-	471	472	474	-	471	472	474	-	471	472	474	-				
	Lo PR	124	125	128	-	131	133	136	-	138	139	142	-	143	145	148	-	149	150	153	-	155	157	160	-	155	157	160	-	155	157	160	-				
	MBh	27.4	27.8	28.6	-	27.2	27.6	28.4	-	26.5	26.9	27.7	-	25.3	25.7	26.5	-	23.9	24.3	25.0	-	22.6	22.9	23.7	-	22.6	22.9	23.7	-	22.6	22.9	23.7	-				
	S/T	0.71	0.63	0.50	-	0.72	0.64	0.50	-	0.74	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-	1.00	0.76	0.62	-	1.00	0.76	0.62	-				
	ΔT	17.08	15.26	11.86	-	17.03	15.21	11.81	-	17.28	15.46	12.06	-	17.01	15.19	11.79	-	16.76	14.94	11.55	-	17.90	16.08	12.68	-	17.90	16.08	12.68	-	17.90	16.08	12.68	-				
	kW	1.55	1.55	1.55	-	1.74	1.74	1.73	-	1.95	1.94	1.94	-	2.17	2.17	2.17	-	2.42	2.42	2.42	-	2.72	2.72	2.71	-	2.72	2.72	2.71	-	2.72	2.72	2.71	-				
700	Amps	5.77	5.77	5.75	-	6.58	6.58	6.56	-	7.49	7.48	7.47	-	8.47	8.46	8.45	-	9.56	9.56	9.54	-	10.85	10.84	10.83	-	10.85	10.84	10.83	-	10.85	10.84	10.83	-				
	Hi PR	253	254	255	-	291	293	294	-	332	333	335	-	376	377	379	-	424	425	426	-	474	475	477	-	474	475	477	-	474	475	477	-				
	Lo PR	127	129	132	-	135	136	139	-	141	143	146	-	147	148	151	-	152	154	157	-	159	160	163	-	159	160	163	-	159	160	163	-				
	MBh	26.3	26.7	27.4	28.6	26.0	26.4	27.2	28.4	25.4	25.7	26.5	27.7	24.2	24.5	25.3	26.5	22.7	23.1	23.9	25.1	21.4	21.8	22.6	23.8	22.7	23.1	23.9	25.1	21.4	21.8	22.6	23.8				
	S/T	0.72	0.64	0.51	0.4	0.73	0.65	0.51	0.4	1.00	0.67	0.54	0.4	1.00	0.69	0.56	0.4	1.00	0.72	0.58	0.4	1.00	1.00	0.63	0.5	1.00	0.72	0.58	0.4	1.00	1.00	0.63	0.5				
	ΔT	23.95	22.13	18.73	15.2	23.90	22.08	18.68	15.2	24.15	22.33	18.94	15.4	23.88	22.06	18.66	15.1	23.64	21.82	18.42	14.9	24.78	22.96	19.56	16.0	23.64	21.82	18.42	14.9	24.78	22.96	19.56	16.0				
825	kW	1.52	1.52	1.52	1.5	1.71	1.71	1.71	1.7	1.92	1.92	1.91	1.9	2.14	2.14	2.14	2.2	2.40	2.39	2.39	2.4	2.69	2.69	2.69	2.7	2.40	2.39	2.39	2.4	2.69	2.69	2.69	2.7				
	Amps	5.66	5.65	5.64	5.7	6.47	6.46	6.45	6.5	7.37	7.37	7.35	7.4	8.35	8.35	8.33	8.4	9.45	9.44	9.43	9.5	10.73	10.73	10.71	10.8	9.45	9.44	9.43	9.5	10.73	10.73	10.71	10.8				
	Hi PR	247	248	249	253.8	286	287	288	292.8	326	328	329	333.6	370	371	373	377.5	418	419	421	424.9	468	469	471	475.5	418	419	421	424.9	468	469	471	475.5				
	Lo PR	122	123	126	131.5	129	131	134	138.9	136	137	140	145.4	141	143	146	150.9	146	148	151	156.3	153	155	158	163.0	146	148	151	156.3	153	155	158	163.0				
	MBh	26.7	27.1	27.9	29.1	26.5	26.8	27.6	28.8	25.8	26.1	26.9	28.1	24.6	25.0	25.7	26.9	23.1	23.5	24.3	25.5	21.8	22.2	23.0	24.2	23.1	23.5	24.3	25.5	21.8	22.2	23.0	24.2				
	S/T	0.80	0.72	0.58	0.4	0.80	0.73	0.59	0.4	1.00	0.75	0.62	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.66	0.5	1.00	1.00	0.71	0.6	1.00	0.79	0.66	0.5	1.00	1.00	0.71	0.6				
1000	ΔT	22.58	20.76	17.36	13.8	22.53	20.71	17.31	13.8	22.79	20.97	17.57	14.0	22.51	20.69	17.30	13.8	22.27	20.45	17.05	13.5	23.41	21.59	18.19	14.7	22.27	20.45	17.05	13.5	23.41	21.59	18.19	14.7				
	kW	1.54	1.54	1.53	1.5	1.72	1.72	1.72	1.7	1.93	1.93	1.93	1.9	2.16	2.16	2.15	2.2	2.41	2.41	2.40	2.4	2.70	2.70	2.70	2.7	2.41	2.41	2.40	2.4	2.70	2.70	2.70	2.7				
	Amps	5.71	5.71	5.69	5.8	6.52	6.52	6.50	6.6	7.43	7.42	7.41	7.5	8.41	8.40	8.39	8.4	9.50	9.49	9.48	9.5	10.78	10.78	10.76	10.8	9.50	9.49	9.48	9.5	10.78	10.78	10.76	10.8				
	Hi PR	249	250	252	256.4	288	289	291	295.3	329	330	332	336.1	373	374	376	380.1	420	421	423	427.5	471	472	474	478.1	420	421	423	427.5	471	472	474	478.1				
	Lo PR	124	125	128	133.6	131	133	136	141.0	138	139	142	147.5	143	145	148	153.0	149	150	153	158.4	155	157	160	165.2	149	150	153	158.4	155	157	160	165.2				
	MBh	27.4	27.8	28.6	29.8	27.2	27.6	28.4	29.6	26.5	26.9	27.7	28.9	25.3	25.7	26.5																					

		OUTDOOR AMBIENT TEMPERATURE																													
		65°F					75°F					85°F					95°F					105°F					115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71						
80		MBh	26.4	26.8	27.6	28.8	26.2	26.6	27.3	28.5	25.5	25.9	26.7	27.9	24.3	24.7	25.5	26.7	22.9	23.2	24.0	25.2	21.5	21.9	22.7	23.9					
	700	S/T	0.84	0.77	0.63	0.5	1.00	0.77	0.64	0.5	1.00	0.80	0.66	0.5	1.00	0.82	0.68	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.76	0.6					
		ΔT	27.98	26.16	22.76	19.2	27.93	26.11	22.71	19.2	28.18	26.36	22.96	19.4	27.91	26.09	22.69	19.2	27.67	25.85	22.45	18.9	28.80	26.98	23.59	20.1					
		kW	1.53	1.52	1.52	1.5	1.71	1.71	1.71	1.7	1.92	1.92	1.92	1.9	2.15	2.14	2.14	2.2	2.40	2.40	2.39	2.4	2.69	2.69	2.69	2.7					
	Amps	5.66	5.66	5.64	5.7	6.47	6.47	6.45	6.5	7.38	7.37	7.36	7.4	8.36	8.35	8.34	8.4	9.45	9.45	9.43	9.5	10.74	10.73	10.72	10.8						
	Hi-PR	247	248	250	254.2	286	287	289	293.2	327	328	330	334.0	371	372	374	378.0	418	419	421	425.4	469	470	472	476.0						
	Lo-PR	122	124	127	132.0	130	131	134	139.4	136	138	141	145.9	142	143	146	151.4	147	149	152	156.8	154	155	158	163.6						
825		MBh	26.8	27.2	28.0	29.2	26.6	27.0	27.8	29.0	25.9	26.3	27.1	28.3	24.7	25.1	25.9	27.1	23.3	23.7	24.4	25.6	22.0	22.3	23.1	24.3					
	700	S/T	1.00	0.85	0.71	0.6	1.00	0.85	0.72	0.6	1.00	0.88	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.7					
		ΔT	26.61	24.79	21.39	17.9	26.56	24.74	21.34	17.8	26.82	25.00	21.60	18.1	26.54	24.72	21.33	17.8	26.30	24.48	21.08	17.6	27.44	25.62	22.22	18.7					
		kW	1.54	1.54	1.53	1.5	1.72	1.72	1.72	1.7	1.93	1.93	1.93	1.9	2.16	2.16	2.15	2.2	2.41	2.41	2.40	2.4	2.70	2.70	2.70	2.7					
	Amps	5.72	5.71	5.70	5.8	6.53	6.52	6.51	6.6	7.43	7.42	7.41	7.5	8.41	8.40	8.39	8.5	9.50	9.50	9.48	9.5	10.79	10.78	10.77	10.8						
	Hi-PR	250	251	253	256.8	289	290	291	295.8	329	331	332	336.6	373	375	376	380.5	421	422	424	427.9	471	472	474	478.5						
	Lo-PR	124	126	129	134.2	132	133	136	141.6	138	140	143	148.1	144	145	148	153.6	149	151	154	159.0	156	157	161	165.7						
1000		MBh	27.6	28.0	28.7	29.9	27.3	27.7	28.5	29.7	26.7	27.0	27.8	29.0	25.5	25.9	26.6	27.8	24.0	24.4	25.2	26.4	22.7	23.1	23.9	25.1					
	700	S/T	1.00	0.89	0.75	0.6	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.88	0.7					
		ΔT	25.11	23.29	19.89	16.4	25.06	23.24	19.84	16.3	25.31	23.49	20.09	16.6	25.04	23.22	19.82	16.3	24.79	22.97	19.58	16.1	25.93	24.11	20.72	17.2					
		kW	1.55	1.55	1.55	1.6	1.74	1.74	1.73	1.7	1.95	1.94	1.94	2.0	2.17	2.17	2.17	2.2	2.42	2.42	2.42	2.4	2.72	2.72	2.71	2.7					
	Amps	5.77	5.77	5.75	5.8	6.58	6.58	6.56	6.6	7.49	7.48	7.47	7.5	8.47	8.46	8.45	8.5	9.56	9.56	9.54	9.6	10.85	10.84	10.83	10.9						
	Hi-PR	253	254	256	260.3	292	293	295	299.3	333	334	336	340.1	377	378	380	384.0	424	425	427	431.4	475	476	478	482.0						
	Lo-PR	128	129	132	137.7	135	137	140	145.1	142	143	146	151.6	147	149	152	157.1	153	154	157	162.5	159	161	164	169.3						
85		MBh	26.9	27.2	28.0	29.2	26.6	27.0	27.8	29.0	25.9	26.3	27.1	28.3	24.8	25.1	25.9	27.1	23.3	23.7	24.5	25.7	22.0	22.4	23.1	24.4					
	700	S/T	1.00	0.87	0.73	0.6	1.00	0.88	0.74	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	1.00	0.7					
		ΔT	31.55	29.73	26.33	22.8	31.50	29.68	26.28	22.8	31.76	29.94	26.54	23.0	31.48	29.66	26.26	22.7	31.24	29.42	26.02	22.5	32.38	30.56	27.16	23.6					
		kW	1.53	1.53	1.52	1.5	1.72	1.71	1.71	1.7	1.92	1.92	1.92	1.9	2.15	2.15	2.14	2.2	2.40	2.40	2.40	2.4	2.70	2.69	2.69	2.7					
	Amps	5.68	5.67	5.66	5.7	6.49	6.48	6.47	6.5	7.39	7.39	7.37	7.4	8.37	8.37	8.35	8.4	9.47	9.46	9.45	9.5	10.75	10.74	10.73	10.8						
	Hi-PR	248	249	251	255.4	287	288	290	294.4	328	329	331	335.2	372	373	375	379.1	419	420	422	426.5	470	471	473	477.1						
	Lo-PR	124	126	129	133.8	131	133	136	141.3	138	139	143	147.8	143	145	148	153.2	149	150	153	158.6	156	157	160	165.4						
825		MBh	27.3	27.6	28.4	29.6	27.0	27.4	28.2	29.4	26.4	26.7	27.5	28.7	25.2	25.5	26.3	27.5	23.7	24.1	24.9	26.1	22.4	22.8	23.6	24.8					
	700	S/T	1.00	0.95	0.81	0.7	1.00	0.95	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.8					
		ΔT	30.19	28.37	24.97	21.4	30.14	28.32	24.92	21.4	30.39	28.57	25.17	21.7	30.12	28.30	24.90	21.4	29.87	28.05	24.66	21.1	31.01	29.19	25.80	22.3					
		kW	1.54	1.54	1.54	1.6	1.73	1.73	1.73	1.7	1.94	1.93	1.93	1.9	2.16	2.16	2.16	2.2	2.41	2.41	2.41	2.4	2.71	2.71	2.70	2.7					
	Amps	5.73	5.73	5.71	5.8	6.54	6.54	6.52	6.6	7.45	7.44	7.43	7.5	8.43	8.42	8.41	8.5	9.52	9.51	9.50	9.6	10.80	10.80	10.78	10.8						
	Hi-PR	251	252	254	258.0	290	291	293	296.9	331	332	333	337.8	375	376	377	381.7	422	423	425	429.1	473	474	475	479.7						
	Lo-PR	126	128	131	136.0	134	135	138	143.4	140	142	145	149.9	146	147	150	155.4	151	153	156	160.8	158	159	162	167.6						
1000		MBh	28.0	28.4	29.2	30.4	27.8	28.2	29.0	30.2	27.1	27.5	28.3	29.5	25.9	26.3	27.1	28.3	24.5	24.8	25.6	26.8	23.2	23.5	24.3	25.5					
	700	S/T	1.00	0.99	0.85	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.91	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8					
		ΔT	28.68	26.86	23.46	19.9	28.63	26.81	23.41	19.9	28.89	27.07	23.67	20.1	28.61	26.79	23.39	19.9	28.37	26.55	23.15	19.6	29.51	27.69	24.29	20.8					
		kW	1.55	1.55	1.55	1.6	1.74	1.74	1.74	1.8	1.95	1.95	1.94	2.0	2.17	2.17	2.17	2.2	2.43	2.42	2.42	2.4	2.72	2.72	2.72	2.7					
	Amps	5.79	5.78	5.77	5.8	6.60	6.59	6.58	6.6	7.50	7.50	7.48	7.5	8.48	8.48	8.46	8.5	9.58	9.57	9.56	9.6	10.86	10.85	10.84	10.9						
	Hi-PR	254	255	257	261.5	293	294	296	300.4	334	335	337	341.2	378	379	381	385.2	425	427	428	432.6	476	477	479	483.2						
	Lo-PR	130	131	134	139.5	137	139	142	146.9	144	145	148	153.4	149	151	154	158.9	155	156	159	164.3	161	163	166	171.1						
IDB: Entering Indoor Dry Bulb Temperature		kW = Total system power																													
High and low pressures are measured at the liquid and suction access fittings.		Shaded area reflects AHRI conditions.																													
		Amps = outdoor unit amps (comp.+fan)																													

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	1000	MBh	42.4	43.0	44.3	-	42.0	42.6	43.9	-	40.9	41.5	42.8	-	39.0	39.6	40.8	-	36.6	37.2	38.5	-	34.5	35.1	36.4	-											
		S/T	0.51	0.44	0.31	-	0.51	0.44	0.32	-	0.54	0.47	0.34	-	0.55	0.48	0.36	-	0.58	0.50	0.38	-	0.62	0.55	0.43	-											
		ΔT	20.42	18.62	15.26	-	20.38	18.57	15.21	-	20.63	18.83	15.47	-	20.36	18.56	15.19	-	20.12	18.32	14.95	-	21.24	19.44	16.08	-											
		kW	2.78	2.78	2.77	-	3.14	3.13	3.13	-	3.54	3.53	3.53	-	3.97	3.97	3.96	-	4.45	4.45	4.44	-	5.02	5.02	5.01	-											
		Amps	10.60	10.59	10.56	-	12.16	12.15	12.12	-	13.90	13.89	13.86	-	15.78	15.77	15.74	-	17.88	17.87	17.84	-	20.34	20.33	20.31	-											
		Hi PR	258	259	261	-	299	300	302	-	342	343	345	-	388	390	391	-	438	439	441	-	492	493	495	-											
		Lo PR	113	114	117	-	120	121	124	-	126	127	130	-	131	133	135	-	136	138	141	-	143	144	147	-											
		MBh	43.3	43.9	45.2	-	42.9	43.5	44.8	-	41.8	42.4	43.7	-	39.9	40.5	41.8	-	37.5	38.1	39.4	-	35.4	36.0	37.3	-											
		S/T	0.62	0.55	0.42	-	0.63	0.56	0.43	-	0.65	0.58	0.45	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	1.00	0.67	0.54	-											
		ΔT	18.38	16.58	13.22	-	18.33	16.53	13.17	-	18.58	16.78	13.42	-	18.31	16.51	13.15	-	18.07	16.27	12.91	-	19.20	17.40	14.04	-											
70	1275	kW	2.81	2.81	2.80	-	3.17	3.17	3.16	-	3.57	3.57	3.56	-	4.00	4.00	4.00	-	4.49	4.48	4.48	-	5.05	5.05	5.05	-											
		Amps	10.75	10.74	10.72	-	12.31	12.30	12.27	-	14.05	14.04	14.01	-	15.93	15.92	15.89	-	18.03	18.02	17.99	-	20.50	20.48	20.46	-											
		Hi PR	262	263	265	-	303	304	306	-	346	347	349	-	392	394	395	-	442	443	445	-	496	497	499	-											
		Lo PR	116	117	120	-	123	124	127	-	129	130	133	-	134	135	138	-	139	140	143	-	145	147	150	-											
		MBh	44.3	44.9	46.2	-	43.9	44.5	45.8	-	42.8	43.4	44.7	-	40.9	41.5	42.7	-	38.5	39.1	40.4	-	36.4	37.0	38.3	-											
		S/T	0.66	0.59	0.46	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	0.73	0.66	0.53	-	1.00	0.71	0.58	-											
		ΔT	17.12	15.32	11.96	-	17.07	15.27	11.91	-	17.32	15.52	12.16	-	17.05	15.25	11.89	-	16.81	15.01	11.65	-	17.94	16.14	12.78	-											
		kW	2.84	2.83	2.83	-	3.19	3.19	3.18	-	3.59	3.59	3.58	-	4.03	4.02	4.02	-	4.51	4.51	4.50	-	5.08	5.07	5.07	-											
		Amps	10.85	10.84	10.81	-	12.40	12.39	12.37	-	14.14	14.13	14.10	-	16.02	16.01	15.98	-	18.12	18.11	18.09	-	20.59	20.58	20.55	-											
		Hi PR	265	266	268	-	306	307	309	-	349	350	352	-	395	397	398	-	445	446	448	-	499	500	502	-											
Lo PR	119	120	123	-	125	127	130	-	132	133	136	-	137	138	141	-	142	143	146	-	148	149	152	-													

75	1000	MBh	42.4	43.0	44.3	46.2	42.0	42.6	43.9	45.9	40.9	41.5	42.8	44.7	39.0	39.6	40.9	42.8	36.6	37.2	38.5	40.5	34.5	35.1	36.4	38.3
		S/T	0.63	0.56	0.43	0.3	0.63	0.56	0.44	0.3	0.66	0.59	0.46	0.3	0.68	0.60	0.48	0.3	1.00	0.62	0.50	0.4	1.00	0.67	0.55	0.4
		ΔT	24.38	22.58	19.22	15.7	24.33	22.53	19.17	15.7	24.59	22.79	19.42	15.9	24.32	22.52	19.15	15.7	24.07	22.27	18.91	15.4	25.20	23.40	20.04	16.6
		kW	2.78	2.77	2.77	2.8	3.13	3.13	3.13	3.2	3.53	3.53	3.53	3.6	3.97	3.96	3.96	4.0	4.45	4.45	4.44	4.5	5.02	5.01	5.01	5.0
		Amps	10.59	10.58	10.55	10.7	12.15	12.14	12.11	12.2	13.89	13.88	13.85	14.0	15.77	15.76	15.73	15.8	17.87	17.86	17.83	17.9	20.33	20.32	20.30	20.4
		Hi PR	258	260	261	265.9	299	301	302	306.9	342	344	345	349.9	389	390	392	396.2	439	440	442	446.1	492	493	495	499.3
	Lo PR	113	114	117	122.2	120	121	124	129.1	126	127	130	135.2	131	133	136	140.4	136	138	141	145.4	143	144	147	151.7	
	1275	MBh	43.3	43.9	45.2	47.1	42.9	43.5	44.8	46.8	41.8	42.4	43.7	45.6	39.9	40.5	41.8	43.7	37.6	38.2	39.4	41.4	35.4	36.0	37.3	39.2
		S/T	0.74	0.67	0.55	0.4	0.75	0.68	0.55	0.4	0.77	0.70	0.57	0.4	1.00	0.72	0.59	0.5	1.00	0.74	0.61	0.5	1.00	0.79	0.66	0.5
		ΔT	22.34	20.54	17.18	13.7	22.29	20.49	17.13	13.6	22.54	20.74	17.38	13.9	22.27	20.47	17.11	13.6	22.03	20.23	16.87	13.4	23.16	21.36	18.00	14.5
kW		2.81	2.81	2.80	2.8	3.17	3.17	3.16	3.2	3.57	3.57	3.56	3.6	4.00	4.00	3.99	4.0	4.48	4.48	4.48	4.5	5.05	5.05	5.04	5.1	
Amps		10.74	10.73	10.71	10.8	12.30	12.29	12.26	12.4	14.04	14.03	14.00	14.1	15.92	15.91	15.88	16.0	18.02	18.01	17.98	18.1	20.49	20.47	20.45	20.6	
Hi PR		262	264	265	269.9	303	305	306	310.9	346	348	349	353.9	393	394	396	400.1	443	444	445	450.0	496	497	499	503.3	
Lo PR	116	117	120	125.0	123	124	127	132.0	129	130	133	138.1	134	135	138	143.2	139	140	143	148.3	145	147	150	154.6		
1500	MBh	44.3	44.9	46.2	48.1	43.9	44.5	45.8	47.8	42.8	43.4	44.7	46.6	40.9	41.5	42.8	44.7	38.5	39.1	40.4	42.4	36.4	37.0	38.3	40.2	
	S/T	0.78	0.71	0.58	0.5	0.79	0.72	0.59	0.5	0.81	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	0.83	0.70	0.6	
	ΔT	21.08	19.28	15.92	12.4	21.03	19.23	15.87	12.4	21.28	19.48	16.12	12.6	21.01	19.21	15.85	12.4	20.77	18.97	15.61	12.1	21.90	20.10	16.74	13.3	
	kW	2.83	2.83	2.82	2.9	3.19	3.19	3.18	3.2	3.59	3.59	3.58	3.6	4.02	4.02	4.01	4.0	4.51	4.50	4.50	4.5	5.07	5.07	5.06	5.1	
	Amps	10.84	10.83	10.80	10.9	12.39	12.38	12.36	12.5	14.13	14.12	14.09	14.2	16.01	16.00	15.97	16.1	18.11	18.10	18.08	18.2	20.58	20.57	20.54	20.7	
	Hi PR	265	267	268	272.9	306	308	309	313.9	349	351	352	356.9	396	397	399	403.2	446	447	449	453.1	499	500	502	506.3	
Lo PR	119	120	123	127.7	126	127	130	134.7	132	133	136	140.8	137	138	141	145.9	142	143	146	151.0	148	150	152	157.3		

		OUTDOOR AMBIENT TEMPERATURE																													
		65°F					75°F					85°F					95°F					105°F					115°F				
IDB	AIRFLOW	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	
80	1000	MBh	42.6	43.2	44.5	46.5	42.2	42.8	44.1	46.1	41.1	41.7	43.0	45.0	39.2	39.8	41.1	43.0	36.9	37.5	38.7	40.7	34.7	35.3	36.6	38.5					
		S/T	0.75	0.67	0.55	0.4	0.75	0.68	0.55	0.4	1.00	0.70	0.58	0.4	1.00	0.72	0.59	0.5	1.00	0.74	0.62	0.5	1.00	0.79	0.66	0.5					
		ΔT	28.37	26.57	23.21	19.7	28.32	26.52	23.16	19.7	28.57	26.77	23.41	19.9	28.30	26.50	23.14	19.7	28.06	26.26	22.90	19.4	29.19	27.39	24.03	20.5					
		kW	2.78	2.78	2.77	2.8	3.14	3.13	3.13	3.2	3.54	3.53	3.53	3.6	3.97	3.97	3.96	4.0	4.45	4.45	4.44	4.5	5.02	5.02	5.01	5.0					
		Amps	10.60	10.59	10.56	10.7	12.16	12.15	12.12	12.2	13.90	13.88	13.86	14.0	15.78	15.76	15.74	15.9	17.88	17.87	17.84	18.0	20.34	20.33	20.30	20.4					
		Hi PR	259	260	262	266.4	300	301	303	307.4	343	344	346	350.4	389	390	392	396.7	439	440	442	446.5	492	493	495	499.8					
		Lo PR	114	115	118	122.7	120	122	125	129.7	127	128	131	135.7	132	133	136	140.9	137	138	141	145.9	143	144	147	152.2					
1275		MBh	43.5	44.1	45.4	47.4	43.2	43.8	45.0	47.0	42.0	42.6	43.9	45.9	40.1	40.7	42.0	43.9	37.8	38.4	39.7	41.6	35.6	36.2	37.5	39.5					
		S/T	0.86	0.79	0.66	0.5	1.00	0.80	0.67	0.5	1.00	0.82	0.69	0.6	1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	1.00	0.78	0.6					
		ΔT	26.32	24.52	21.16	17.7	26.27	24.47	21.11	17.6	26.53	24.73	21.37	17.9	26.26	24.46	21.09	17.6	26.02	24.22	20.85	17.4	27.14	25.34	21.98	18.5					
		kW	2.81	2.81	2.80	2.8	3.17	3.17	3.16	3.2	3.57	3.57	3.56	3.6	4.00	4.00	3.99	4.0	4.49	4.48	4.48	4.5	5.05	5.05	5.04	5.1					
		Amps	10.75	10.74	10.71	10.8	12.31	12.30	12.27	12.4	14.05	14.04	14.01	14.1	15.93	15.92	15.89	16.0	18.03	18.02	17.99	18.1	20.49	20.48	20.46	20.6					
		Hi PR	263	264	266	270.3	304	305	307	311.4	347	348	350	354.3	393	394	396	400.6	443	444	446	450.5	496	497	499	503.7					
		Lo PR	116	118	121	125.6	123	125	128	132.5	129	131	134	138.6	135	136	139	143.7	140	141	144	148.8	146	147	150	155.1					
1500		MBh	44.5	45.1	46.4	48.4	44.1	44.7	46.0	48.0	43.0	43.6	44.9	46.9	41.1	41.7	43.0	44.9	38.8	39.4	40.6	42.6	36.6	37.2	38.5	40.5					
		S/T	0.90	0.83	0.70	0.6	1.00	0.83	0.71	0.6	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.6	1.00	0.90	0.77	0.6	1.00	1.00	0.82	0.7					
		ΔT	25.06	23.26	19.90	16.4	25.02	23.21	19.85	16.4	25.27	23.47	20.11	16.6	25.00	23.20	19.83	16.4	24.76	22.96	19.59	16.1	25.88	24.08	20.72	17.2					
		kW	2.83	2.83	2.83	2.9	3.19	3.19	3.18	3.2	3.59	3.59	3.58	3.6	4.02	4.02	4.02	4.0	4.51	4.51	4.50	4.5	5.08	5.07	5.07	5.1					
		Amps	10.85	10.83	10.81	10.9	12.40	12.39	12.36	12.5	14.14	14.13	14.10	14.2	16.02	16.01	15.98	16.1	18.12	18.11	18.08	18.2	20.59	20.58	20.55	20.7					
		Hi PR	266	267	269	273.4	307	308	310	314.4	350	351	353	357.4	396	397	399	403.6	446	447	449	453.5	499	500	502	506.8					
		Lo PR	119	120	123	128.2	126	127	130	135.2	132	134	136	141.3	137	139	142	146.4	142	144	147	151.5	149	150	153	157.8					

85	1000	MBh	43.3	43.9	45.2	47.2	43.0	43.6	44.8	46.8	41.8	42.5	43.7	45.7	39.9	40.5	41.8	43.8	37.6	38.2	39.5	41.4	35.4	36.0	37.3	39.3
		S/T	1.00	0.77	0.64	0.5	1.00	0.77	0.65	0.5	1.00	0.80	0.67	0.5	1.00	0.82	0.69	0.6	1.00	1.00	0.71	0.6	1.00	1.00	0.76	0.6
		ΔT	31.90	30.10	26.74	23.3	31.85	30.05	26.69	23.2	32.11	30.31	26.95	23.5	31.84	30.04	26.67	23.2	31.60	29.79	26.43	23.0	32.72	30.92	27.56	24.1
		kW	2.79	2.78	2.78	2.8	3.14	3.14	3.13	3.2	3.54	3.54	3.53	3.6	3.98	3.97	3.97	4.0	4.46	4.46	4.45	4.5	5.03	5.02	5.02	5.0
		Amps	10.63	10.62	10.59	10.7	12.19	12.18	12.15	12.3	13.93	13.91	13.89	14.0	15.81	15.79	15.77	15.9	17.91	17.90	17.87	18.0	20.37	20.36	20.33	20.5
	Hi PR	260	261	263	267.6	301	302	304	308.6	344	345	347	351.6	390	392	393	397.9	440	441	443	447.8	494	495	496	501.0	
	Lo PR	115	117	120	124.4	122	124	127	131.4	128	130	133	137.4	133	135	138	142.6	138	140	143	147.6	145	146	149	154.0	
	1275	MBh	44.3	44.9	46.1	48.1	43.9	44.5	45.8	47.7	42.8	43.4	44.6	46.6	40.8	41.4	42.7	44.7	38.5	39.1	40.4	42.3	36.4	37.0	38.2	40.2
		S/T	1.00	0.88	0.76	0.6	1.00	0.89	0.76	0.6	1.00	0.91	0.79	0.7	1.00	1.00	0.80	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.87	0.7
		ΔT	29.86	28.06	24.70	21.2	29.81	28.01	24.65	21.2	30.06	28.26	24.90	21.4	29.79	27.99	24.63	21.1	29.55	27.75	24.39	20.9	30.68	28.88	25.52	22.0
kW		2.82	2.82	2.81	2.8	3.18	3.18	3.17	3.2	3.58	3.58	3.57	3.6	4.01	4.01	4.00	4.0	4.49	4.49	4.48	4.5	5.06	5.06	5.05	5.1	
Amps		10.78	10.77	10.74	10.9	12.34	12.33	12.30	12.4	14.08	14.07	14.04	14.2	15.96	15.95	15.92	16.0	18.06	18.05	18.02	18.1	20.52	20.51	20.49	20.6	
Hi PR	264	265	267	271.6	305	306	308	312.6	348	349	351	355.6	394	395	397	401.8	444	445	447	451.7	497	499	500	505.0		
Lo PR	118	119	122	127.3	125	126	129	134.2	131	133	135	140.3	136	138	141	145.4	141	143	146	150.5	148	149	152	156.8		
1500	MBh	45.2	45.9	47.1	49.1	44.9	45.5	46.7	48.7	43.7	44.4	45.6	47.6	41.8	42.4	43.7	45.7	39.5	40.1	41.4	43.3	37.3	37.9	39.2	41.2	
	S/T	1.00	0.92	0.80	0.7	1.00	0.93	0.80	0.7	1.00	0.95	0.83	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.91	0.8	
	ΔT	28.60	26.80	23.44	20.0	28.55	26.75	23.39	19.9	28.80	27.00	23.64	20.2	28.53	26.73	23.37	19.9	28.29	26.49	23.13	19.6	29.42	27.62	24.26	20.8	
	kW	2.84	2.84	2.83	2.9	3.20	3.20	3.19	3.2	3.60	3.60	3.59	3.6	4.03	4.03	4.02	4.1	4.52	4.51	4.51	4.5	5.08	5.08	5.07	5.1	
	Amps	10.88	10.86	10.84	11.0	12.43	12.42	12.39	12.5	14.17	14.16	14.13	14.3	16.05	16.04	16.01	16.1	18.15	18.14	18.11	18.2	20.62	20.61	20.58	20.7	
Hi PR	267	268	270	274.6	308	309	311	315.6	351	352	354	358.6	397	399	400	404.9	447	448	450	454.8	501	502	503	508.0		
Lo PR	121	122	125	130.0	128	129	132	136.9	134	135	138	143.0	139	140	143	148.1	144	145	148	153.2	150	152	155	159.5		

DB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI conditions.

Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	30.5	30.9	31.9	-	30.2	30.7	31.6	-	29.4	29.9	30.8	-	28.1	28.5	29.4	-	26.4	26.8	27.7	-	24.8	25.3	26.2	-
	S/T	0.53	0.46	0.33	-	0.54	0.47	0.34	-	0.56	0.49	0.36	-	0.58	0.51	0.38	-	0.60	0.53	0.40	-	1.00	0.58	0.45	-
	ΔT	19.54	17.80	14.56	-	19.49	17.75	14.51	-	19.73	18.00	14.75	-	19.47	17.73	14.49	-	19.24	17.50	14.26	-	20.33	18.59	15.35	-
	kW	1.75	1.75	1.74	-	1.97	1.97	1.97	-	2.23	2.22	2.22	-	2.50	2.50	2.49	-	2.80	2.80	2.80	-	3.16	3.16	3.15	-
	Amps	6.68	6.67	6.65	-	7.66	7.65	7.63	-	8.75	8.74	8.73	-	9.93	9.93	9.91	-	11.25	11.25	11.23	-	12.81	12.80	12.78	-
	Hi PR	247	248	250	-	286	287	289	-	327	329	330	-	372	373	374	-	419	420	422	-	470	471	473	-
1000	Lo PR	116	118	121	-	124	125	128	-	130	131	134	-	135	136	139	-	140	142	145	-	147	148	151	-
	MBh	31.1	31.6	32.5	-	30.9	31.3	32.2	-	30.0	30.5	31.4	-	28.7	29.1	30.0	-	27.0	27.4	28.3	-	25.4	25.9	26.8	-
	S/T	0.64	0.57	0.44	-	0.65	0.57	0.44	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.69	0.56	-
	ΔT	17.74	16.00	12.76	-	17.69	15.95	12.71	-	17.93	16.20	12.95	-	17.67	15.93	12.69	-	17.44	15.70	12.46	-	18.53	16.79	13.55	-
	kW	1.77	1.77	1.76	-	2.00	1.99	1.99	-	2.25	2.24	2.24	-	2.52	2.52	2.51	-	2.82	2.82	2.82	-	3.18	3.18	3.17	-
	Amps	6.76	6.76	6.74	-	7.74	7.74	7.72	-	8.84	8.83	8.81	-	10.02	10.01	10.00	-	11.34	11.33	11.32	-	12.89	12.88	12.87	-
1200	Hi PR	251	252	253	-	290	291	293	-	331	332	334	-	375	376	378	-	423	424	426	-	474	475	477	-
	Lo PR	119	121	124	-	126	128	131	-	132	134	137	-	138	139	142	-	143	144	147	-	149	151	154	-
	MBh	31.9	32.4	33.3	-	31.7	32.1	33.0	-	30.9	31.3	32.2	-	29.5	29.9	30.8	-	27.8	28.2	29.2	-	26.3	26.7	27.6	-
	S/T	0.68	0.61	0.48	-	0.69	0.61	0.48	-	0.71	0.64	0.51	-	0.73	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-
	ΔT	16.37	14.64	11.39	-	16.33	14.59	11.35	-	16.57	14.83	11.59	-	16.31	14.57	11.33	-	16.08	14.34	11.10	-	17.16	15.43	12.18	-
	kW	1.78	1.78	1.78	-	2.01	2.01	2.00	-	2.26	2.26	2.26	-	2.53	2.53	2.53	-	2.84	2.84	2.83	-	3.19	3.19	3.19	-
1500	Amps	6.83	6.82	6.81	-	7.81	7.80	7.79	-	8.90	8.90	8.88	-	10.09	10.08	10.06	-	11.41	11.40	11.38	-	12.96	12.95	12.93	-
	Hi PR	254	255	257	-	293	294	296	-	334	335	337	-	378	380	381	-	426	427	429	-	477	478	480	-
	Lo PR	122	124	127	-	129	131	134	-	136	137	140	-	141	142	145	-	146	148	151	-	153	154	157	-

75	MBh	30.5	31.0	31.9	33.3	30.3	30.7	31.6	33.0	29.5	29.9	30.8	32.2	28.1	28.5	29.4	30.8	26.4	26.8	27.7	29.1	24.8	25.3	26.2	27.6
	S/T	0.66	0.58	0.45	0.3	0.66	0.59	0.46	0.3	0.69	0.61	0.48	0.3	1.00	0.63	0.50	0.4	1.00	0.65	0.52	0.4	1.00	0.70	0.57	0.4
	ΔT	23.36	21.62	18.38	15.0	23.31	21.57	18.33	15.0	23.55	21.82	18.57	15.2	23.29	21.55	18.31	14.9	23.06	21.32	18.08	14.7	24.15	22.41	19.17	15.8
	kW	1.75	1.75	1.74	1.8	1.97	1.97	1.97	2.0	2.22	2.22	2.22	2.2	2.50	2.50	2.49	2.5	2.80	2.80	2.80	2.8	3.16	3.16	3.15	3.2
	Amps	6.67	6.66	6.65	6.7	7.65	7.64	7.63	7.7	8.74	8.74	8.72	8.8	9.93	9.92	9.90	10.0	11.25	11.24	11.22	11.3	12.80	12.79	12.77	12.8
	Hi PR	247	248	250	254.5	287	288	289	293.7	328	329	330	334.8	372	373	375	379.0	420	421	422	426.7	470	472	473	477.6
1000	Lo PR	116	118	121	125.8	124	125	128	133.0	130	131	134	139.2	135	137	140	144.5	140	142	145	149.7	147	148	151	156.2
	MBh	31.1	31.6	32.5	33.9	30.9	31.3	32.2	33.6	30.1	30.5	31.4	32.8	28.7	29.1	30.0	31.4	27.0	27.4	28.4	29.8	25.5	25.9	26.8	28.2
	S/T	0.76	0.69	0.56	0.4	0.77	0.70	0.57	0.4	0.79	0.72	0.59	0.5	1.00	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.81	0.68	0.5
	ΔT	21.56	19.82	16.58	13.2	21.51	19.77	16.53	13.2	21.75	20.02	16.77	13.4	21.49	19.75	16.51	13.1	21.26	19.52	16.28	12.9	22.35	20.61	17.37	14.0
	kW	1.77	1.77	1.76	1.8	1.99	1.99	1.99	2.0	2.24	2.24	2.24	2.3	2.52	2.52	2.51	2.5	2.82	2.82	2.82	2.8	3.18	3.18	3.17	3.2
	Amps	6.76	6.75	6.73	6.8	7.74	7.73	7.71	7.8	8.83	8.82	8.81	8.9	10.01	10.01	9.99	10.1	11.34	11.33	11.31	11.4	12.89	12.88	12.86	12.9
1200	Hi PR	251	252	254	258.0	290	291	293	297.2	331	332	334	338.3	375	376	378	382.5	423	424	426	430.2	474	475	477	481.1
	Lo PR	119	121	124	128.5	126	128	131	135.7	133	134	137	141.9	138	139	142	147.2	143	144	147	152.4	149	151	154	158.9
	MBh	32.0	32.4	33.3	34.7	31.7	32.1	33.0	34.4	30.9	31.3	32.2	33.6	29.5	29.9	30.9	32.3	27.8	28.3	29.2	30.6	26.3	26.7	27.6	29.0
	S/T	0.81	0.73	0.60	0.5	0.81	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	0.80	0.67	0.5	1.00	0.85	0.72	0.6
	ΔT	20.19	18.46	15.21	11.9	20.15	18.41	15.17	11.8	20.39	18.65	15.41	12.0	20.13	18.39	15.15	11.8	19.90	18.16	14.92	11.6	20.98	19.25	16.00	12.6
	kW	1.78	1.78	1.78	1.8	2.01	2.01	2.00	2.0	2.26	2.26	2.25	2.3	2.53	2.53	2.53	2.5	2.84	2.83	2.83	2.8	3.19	3.19	3.19	3.2
1500	Amps	6.82	6.82	6.80	6.9	7.80	7.80	7.78	7.9	8.90	8.89	8.87	8.9	10.08	10.07	10.05	10.1	11.40	11.39	11.38	11.5	12.95	12.94	12.93	13.0
	Hi PR	254	255	257	261.3	293	294	296	300.5	334	336	337	341.6	379	380	381	385.8	426	427	429	433.5	477	478	480	484.4
	Lo PR	122	124	127	131.7	129	131	134	138.9	136	137	140	145.1	141	142	145	150.4	146	148	151	155.6	153	154	157	162.1

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.
 Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHR1 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions.

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	30.7	31.1	32.0	33.4	30.4	30.8	31.8	33.2	29.6	30.0	31.0	32.4	28.2	28.7	29.6	31.0	26.5	27.0	27.9	29.3	25.0	25.4	26.4	27.8
	S/T	0.78	0.70	0.57	0.4	1.00	0.71	0.58	0.4	1.00	0.73	0.60	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	1.00	0.69	0.6
	ΔT	27.20	25.47	22.22	18.9	27.16	25.42	22.17	18.8	27.40	25.66	22.42	19.1	27.14	25.40	22.16	18.8	26.91	25.17	21.92	18.6	27.99	26.26	23.01	19.7
	kW	1.75	1.75	1.74	1.8	1.97	1.97	1.97	2.0	2.23	2.22	2.22	2.2	2.50	2.50	2.49	2.5	2.80	2.80	2.80	2.8	3.16	3.16	3.15	3.2
	Amps	6.68	6.67	6.65	6.7	7.66	7.65	7.63	7.7	8.75	8.74	8.72	8.8	9.93	9.92	9.91	10.0	11.25	11.25	11.23	11.3	12.80	12.80	12.78	12.9
	Hi PR	248	249	251	255.0	287	288	290	294.2	328	329	331	335.3	372	373	375	379.5	420	421	423	427.2	471	472	474	478.1
1000	Lo PR	117	118	121	126.4	124	126	128	133.5	130	132	135	139.7	136	137	140	145.0	141	142	145	150.2	147	149	152	156.7
	MBh	31.3	31.7	32.7	34.1	31.0	31.5	32.4	33.8	30.2	30.7	31.6	33.0	28.8	29.3	30.2	31.6	27.2	27.6	28.5	29.9	25.6	26.1	27.0	28.4
	S/T	0.88	0.81	0.68	0.5	1.00	0.82	0.69	0.5	1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.6	1.00	1.00	0.80	0.7
	ΔT	25.40	23.67	20.42	17.1	25.36	23.62	20.37	17.0	25.60	23.86	20.62	17.3	25.34	23.60	20.36	17.0	25.11	23.37	20.12	16.8	26.19	24.46	21.21	17.9
	kW	1.77	1.77	1.76	1.8	1.99	1.99	1.99	2.0	2.25	2.24	2.24	2.3	2.52	2.52	2.51	2.5	2.82	2.82	2.82	2.8	3.18	3.18	3.17	3.2
	Amps	6.76	6.76	6.74	6.8	7.74	7.74	7.72	7.8	8.84	8.83	8.81	8.9	10.02	10.01	9.99	10.1	11.34	11.33	11.32	11.4	12.89	12.88	12.87	12.9
1200	Hi PR	251	252	254	258.5	291	292	293	297.7	332	333	334	338.7	376	377	379	383.0	424	425	426	430.7	474	475	477	481.6
	Lo PR	120	121	124	129.1	127	128	131	136.2	133	134	137	142.5	138	140	143	147.7	144	145	148	152.9	150	151	154	159.4
	MBh	32.1	32.6	33.5	34.9	31.9	32.3	33.2	34.6	31.0	31.5	32.4	33.8	29.7	30.1	31.0	32.4	28.0	28.4	29.3	30.7	26.4	26.9	27.8	29.2
	S/T	1.00	0.85	0.72	0.6	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.6	1.00	0.90	0.77	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.7
	ΔT	24.04	22.30	19.06	15.7	23.99	22.26	19.01	15.7	24.24	22.50	19.26	15.9	23.97	22.24	18.99	15.6	23.74	22.01	18.76	15.4	24.83	23.09	19.85	16.5
	kW	1.78	1.78	1.78	1.8	2.01	2.01	2.00	2.0	2.26	2.26	2.26	2.3	2.53	2.53	2.53	2.5	2.84	2.84	2.83	2.8	3.19	3.19	3.19	3.2
85	Amps	6.83	6.82	6.80	6.9	7.81	7.80	7.78	7.9	8.90	8.89	8.88	9.0	10.08	10.08	10.06	10.1	11.41	11.40	11.38	11.5	12.96	12.95	12.93	13.0
	Hi PR	255	256	257	261.7	294	295	297	301.0	335	336	338	342.0	379	380	382	386.3	427	428	430	434.0	478	479	481	484.9
	Lo PR	123	124	127	132.2	130	131	134	139.4	136	138	141	145.6	141	143	146	150.9	147	148	151	156.1	153	155	158	162.6
	MBh	31.2	31.6	32.6	34.0	30.9	31.4	32.3	33.7	30.1	30.6	31.5	32.9	28.7	29.2	30.1	31.5	27.1	27.5	28.4	29.8	25.5	26.0	26.9	28.3
	S/T	1.00	0.80	0.67	0.5	1.00	0.81	0.68	0.5	1.00	0.83	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.7
	ΔT	30.61	28.88	25.63	22.3	30.57	28.83	25.59	22.2	30.81	29.07	25.83	22.5	30.55	28.81	25.57	22.2	30.32	28.58	25.34	22.0	31.40	29.67	26.42	23.1
1000	kW	1.75	1.75	1.75	1.8	1.98	1.98	1.97	2.0	2.23	2.23	2.22	2.2	2.50	2.50	2.50	2.5	2.81	2.80	2.80	2.8	3.16	3.16	3.16	3.2
	Amps	6.70	6.69	6.67	6.7	7.67	7.67	7.65	7.7	8.77	8.76	8.74	8.8	9.95	9.94	9.93	10.0	11.27	11.26	11.25	11.3	12.82	12.81	12.80	12.9
	Hi PR	249	250	252	256.1	288	289	291	295.4	329	330	332	336.4	374	375	376	380.7	421	422	424	428.4	472	473	475	479.3
	Lo PR	119	120	123	128.1	126	127	130	135.3	132	134	137	141.5	137	139	142	146.8	143	144	147	152.0	149	150	153	158.5
	MBh	31.8	32.3	33.2	34.6	31.5	32.0	32.9	34.3	30.7	31.2	32.1	33.5	29.4	29.8	30.7	32.1	27.7	28.1	29.0	30.4	26.1	26.6	27.5	28.9
	S/T	1.00	0.91	0.78	0.6	1.00	0.91	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.8
1200	ΔT	28.81	27.08	23.83	20.5	28.77	27.03	23.78	20.4	29.01	27.27	24.03	20.7	28.75	27.01	23.77	20.4	28.52	26.78	23.53	20.2	29.60	27.87	24.62	21.3
	kW	1.77	1.77	1.77	1.8	2.00	2.00	1.99	2.0	2.25	2.25	2.24	2.3	2.52	2.52	2.52	2.5	2.83	2.82	2.82	2.8	3.18	3.18	3.18	3.2
	Amps	6.78	6.77	6.76	6.8	7.76	7.75	7.74	7.8	8.85	8.85	8.83	8.9	10.04	10.03	10.01	10.1	11.36	11.35	11.33	11.4	12.91	12.90	12.89	13.0
	Hi PR	252	254	255	259.6	292	293	295	298.8	333	334	336	339.9	377	378	380	384.2	425	426	428	431.8	476	477	478	482.7
	Lo PR	121	123	126	130.8	129	130	133	138.0	135	136	139	144.2	140	142	145	149.5	145	147	150	154.7	152	153	156	161.2
	MBh	32.6	33.1	34.0	35.4	32.4	32.8	33.7	35.1	31.6	32.0	32.9	34.3	30.2	30.6	31.5	32.9	28.5	28.9	29.9	31.3	27.0	27.4	28.3	29.7
85	S/T	1.00	0.95	0.82	0.7	1.00	0.96	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.89	0.8	1.00	1.00	1.00	0.8
	ΔT	27.45	25.71	22.47	19.1	27.40	25.67	22.42	19.1	27.65	25.91	22.67	19.3	27.39	25.65	22.40	19.0	27.15	25.42	22.17	18.8	28.24	26.50	23.26	19.9
	kW	1.79	1.79	1.78	1.8	2.01	2.01	2.01	2.0	2.27	2.26	2.26	2.3	2.54	2.54	2.53	2.5	2.84	2.84	2.84	2.9	3.20	3.20	3.19	3.2
	Amps	6.85	6.84	6.82	6.9	7.83	7.82	7.80	7.9	8.92	8.91	8.90	9.0	10.10	10.10	10.08	10.2	11.42	11.42	11.40	11.5	12.98	12.97	12.95	13.0
	Hi PR	256	257	259	262.9	295	296	298	302.1	336	337	339	343.2	380	381	383	387.4	428	429	431	435.1	479	480	482	486.0
	Lo PR	125	126	129	134.0	132	133	136	141.1	138	139	142	147.4	143	145	148	152.7	148	150	153	157.9	155	156	159	164.4

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI conditions.

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		ENTERING INDOOR WET BULB TEMPERATURE																								
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1300	MBh	46.1	46.7	48.1	-	45.7	46.3	47.7	-	44.5	45.1	46.5	-	42.4	43.0	44.4	-	39.8	40.5	41.9	-	37.5	38.2	39.5	-
		S/T	0.57	0.50	0.36	-	0.58	0.50	0.37	-	0.61	0.53	0.39	-	0.62	0.55	0.41	-	1.00	0.57	0.44	-	1.00	0.62	0.49	-
		ΔT	19.02	17.30	14.10	-	18.97	17.26	14.06	-	19.21	17.50	14.30	-	18.95	17.24	14.04	-	18.72	17.01	13.81	-	19.80	18.08	14.88	-
		kW	3.07	3.07	3.06	-	3.44	3.44	3.43	-	3.86	3.86	3.85	-	4.31	4.30	4.30	-	4.81	4.81	4.80	-	5.40	5.40	5.39	-
		Amps	11.06	11.04	11.01	-	12.67	12.66	12.63	-	14.48	14.46	14.44	-	16.43	16.42	16.39	-	18.61	18.60	18.57	-	21.17	21.16	21.13	-
	Hi PR	265	266	268	-	307	308	310	-	351	352	354	-	398	399	401	-	449	450	452	-	503	505	506	-	
	Lo PR	122	124	127	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	
	1575	MBh	46.9	47.6	48.9	-	46.5	47.1	48.5	-	45.3	45.9	47.3	-	43.2	43.9	45.2	-	40.7	41.3	42.7	-	38.3	39.0	40.4	-
		S/T	0.67	0.59	0.45	-	0.67	0.60	0.46	-	0.70	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-
		ΔT	17.50	15.79	12.59	-	17.46	15.74	12.54	-	17.70	15.98	12.78	-	17.44	15.73	12.52	-	17.21	15.50	12.30	-	18.28	16.57	13.37	-
kW		3.10	3.10	3.09	-	3.47	3.47	3.46	-	3.89	3.88	3.88	-	4.34	4.33	4.33	-	4.84	4.83	4.83	-	5.43	5.42	5.42	-	
Amps		11.18	11.17	11.14	-	12.79	12.78	12.75	-	14.60	14.59	14.56	-	16.55	16.54	16.51	-	18.73	18.72	18.69	-	21.29	21.28	21.25	-	
Hi PR	268	269	271	-	310	311	313	-	354	355	357	-	401	402	404	-	452	453	455	-	507	508	510	-		
Lo PR	125	127	130	-	132	134	137	-	139	141	144	-	145	146	149	-	150	152	155	-	157	158	162	-		
1900	MBh	48.2	48.8	50.2	-	47.8	48.4	49.8	-	46.6	47.2	48.6	-	44.5	45.1	46.5	-	41.9	42.6	44.0	-	39.6	40.3	41.7	-	
	S/T	0.71	0.63	0.50	-	0.72	0.64	0.50	-	0.74	0.67	0.53	-	1.00	0.68	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-	
	ΔT	16.12	14.41	11.21	-	16.07	14.36	11.16	-	16.32	14.60	11.40	-	16.06	14.34	11.14	-	15.83	14.11	10.91	-	16.90	15.19	11.99	-	
	kW	3.13	3.12	3.12	-	3.50	3.49	3.49	-	3.91	3.91	3.90	-	4.36	4.36	4.35	-	4.86	4.86	4.85	-	5.45	5.45	5.44	-	
	Amps	11.29	11.28	11.25	-	12.91	12.89	12.87	-	14.71	14.70	14.67	-	16.66	16.65	16.62	-	18.84	18.83	18.80	-	21.40	21.39	21.36	-	
Hi PR	272	273	275	-	314	315	317	-	358	359	361	-	405	406	408	-	456	457	459	-	510	511	513	-		
Lo PR	128	130	133	-	136	137	141	-	142	144	147	-	148	150	153	-	153	155	158	-	160	162	165	-		

75	1300	MBh	46.1	46.8	48.1	50.3	45.7	46.3	47.7	49.8	44.5	45.1	46.5	48.6	42.4	43.1	44.4	46.6	39.9	40.5	41.9	44.0	37.5	38.2	39.6	41.7
		S/T	0.70	0.63	0.49	0.3	0.71	0.63	0.50	0.4	1.00	0.66	0.52	0.4	1.00	0.68	0.54	0.4	1.00	0.70	0.56	0.4	1.00	1.00	0.62	0.5
		ΔT	22.79	21.07	17.87	14.6	22.74	21.03	17.83	14.5	22.98	21.27	18.07	14.7	22.72	21.01	17.81	14.5	22.49	20.78	17.58	14.3	23.57	21.85	18.65	15.3
		kW	3.07	3.07	3.06	3.1	3.44	3.44	3.43	3.5	3.86	3.85	3.85	3.9	4.31	4.30	4.30	4.3	4.81	4.80	4.80	4.8	5.40	5.39	5.39	5.4
		Amps	11.04	11.03	11.00	11.1	12.66	12.65	12.62	12.7	14.47	14.45	14.43	14.5	16.42	16.41	16.38	16.5	18.60	18.59	18.56	18.7	21.16	21.15	21.12	21.2
		Hi PR	265	266	268	272.7	307	308	310	314.6	351	352	354	358.6	398	399	401	405.9	449	450	452	456.9	504	505	507	511.3
		Lo PR	123	124	127	132.4	130	132	135	139.9	137	138	141	146.5	142	144	147	152.0	148	149	152	157.5	154	156	159	164.3
		MBh	46.9	47.6	49.0	51.1	46.5	47.2	48.5	50.7	45.3	46.0	47.3	49.5	43.2	43.9	45.3	47.4	40.7	41.3	42.7	44.8	38.4	39.0	40.4	42.5
		S/T	0.80	0.72	0.58	0.4	0.80	0.73	0.59	0.4	1.00	0.75	0.62	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.66	0.5	1.00	1.00	0.71	0.6
		ΔT	21.27	19.56	16.36	13.0	21.23	19.51	16.31	13.0	21.47	19.75	16.55	13.2	21.21	19.50	16.29	13.0	20.98	19.27	16.07	12.7	22.05	20.34	17.14	13.8
1575		kW	3.10	3.09	3.09	3.1	3.47	3.47	3.46	3.5	3.88	3.88	3.87	3.9	4.33	4.33	4.32	4.4	4.84	4.83	4.83	4.9	5.42	5.42	5.41	5.4
		Amps	11.17	11.15	11.13	11.3	12.78	12.77	12.74	12.9	14.59	14.58	14.55	14.7	16.54	16.53	16.50	16.6	18.72	18.71	18.68	18.8	21.28	21.27	21.24	21.4
		Hi PR	268	269	271	275.9	310	311	313	317.8	354	355	357	361.8	401	403	404	409.1	452	454	455	460.1	507	508	510	514.5
		Lo PR	125	127	130	134.9	133	134	137	142.4	139	141	144	149.0	145	146	149	154.5	150	152	155	160.0	157	158	162	166.8
		MBh	48.2	48.9	50.2	52.4	47.8	48.4	49.8	51.9	46.6	47.2	48.6	50.7	44.5	45.2	46.5	48.7	42.0	42.6	44.0	46.1	39.6	40.3	41.7	43.8
		S/T	0.84	0.76	0.63	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.66	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.6
1900		ΔT	19.89	18.18	14.98	11.7	19.84	18.13	14.93	11.6	20.09	18.37	15.17	11.9	19.83	18.11	14.91	11.6	19.60	17.88	14.68	11.4	20.67	18.96	15.76	12.4
		kW	3.12	3.12	3.11	3.1	3.49	3.49	3.49	3.5	3.91	3.91	3.90	3.9	4.36	4.36	4.35	4.4	4.86	4.86	4.85	4.9	5.45	5.45	5.44	5.5
		Amps	11.28	11.27	11.24	11.4	12.90	12.88	12.85	13.0	14.70	14.69	14.66	14.8	16.65	16.64	16.61	16.7	18.83	18.82	18.79	18.9	21.39	21.38	21.35	21.5
		Hi PR	272	273	275	279.5	314	315	317	321.5	358	359	361	365.4	405	406	408	412.7	456	457	459	463.7	511	512	514	518.2
		Lo PR	128	130	133	138.4	136	137	141	145.9	143	144	147	152.4	148	150	153	158.0	154	155	158	163.4	160	162	165	170.2
		MBh	48.2	48.9	50.2	52.4	47.8	48.4	49.8	51.9	46.6	47.2	48.6	50.7	44.5	45.2	46.5	48.7	42.0	42.6	44.0	46.1	39.6	40.3	41.7	43.8

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions.

kW = Total system power

Amps = outdoor unit amps (comp.+fan)

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE										ENTERING INDOOR WET BULB TEMPERATURE																			
				65°F					75°F					85°F					95°F					105°F					115°F				
				59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
80	1300	MBh	46.3	47.0	48.4	50.5	45.9	46.6	48.0	50.1	44.7	45.4	46.8	48.9	42.6	43.3	44.7	46.8	40.1	40.8	42.1	44.2	37.8	38.4	39.8	41.9	37.8	38.4	39.8	41.9	44.2		
		S/T	1.00	0.75	0.62	0.5	1.00	0.76	0.62	0.5	1.00	0.78	0.65	0.5	1.00	0.80	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.74	0.6	1.00	1.00	0.74	0.6	0.5		
		ΔT	26.58	24.87	21.67	18.4	26.54	24.82	21.62	18.3	26.78	25.06	21.86	18.5	26.52	24.80	21.60	18.3	26.29	24.58	21.37	18.1	27.36	25.65	22.45	19.1	27.36	25.65	22.45	19.1	18.1		
		kW	3.07	3.07	3.06	3.1	3.44	3.44	3.43	3.5	3.86	3.86	3.85	3.9	4.31	4.30	4.30	4.3	4.81	4.81	4.80	4.8	5.40	5.39	5.39	5.4	5.40	5.39	5.39	5.4	4.8		
		Amps	11.05	11.04	11.01	11.1	12.67	12.66	12.63	12.8	14.47	14.46	14.43	14.6	16.43	16.41	16.39	16.5	18.61	18.60	18.57	18.7	21.17	21.15	21.13	21.3	21.17	21.15	21.13	21.3	18.7		
		Hi PR	266	267	269	273.2	307	309	310	315.1	351	353	354	359.1	399	400	402	406.4	450	451	453	457.4	504	505	507	511.8	504	505	507	511.8	457.4		
	Lo PR	123	125	128	133.0	131	132	135	140.5	137	139	142	147.0	143	144	147	152.6	148	150	153	158.0	155	156	160	164.8	155	156	160	164.8	158.0			
	1575	MBh	47.2	47.8	49.2	51.3	46.8	47.4	48.8	50.9	45.5	46.2	47.6	49.7	43.5	44.1	45.5	47.6	40.9	41.6	43.0	45.1	38.6	39.3	40.6	42.8	38.6	39.3	40.6	42.8	45.1		
		S/T	1.00	0.85	0.71	0.6	1.00	0.85	0.72	0.6	1.00	0.88	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7	0.6		
		ΔT	25.07	23.36	20.15	16.8	25.02	23.31	20.11	16.8	25.26	23.55	20.35	17.0	25.01	23.29	20.09	16.8	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6	25.85	24.14	20.93	17.6	16.5		
		kW	3.10	3.10	3.09	3.1	3.47	3.47	3.46	3.5	3.89	3.88	3.88	3.9	4.34	4.33	4.33	4.4	4.84	4.83	4.83	4.9	5.43	5.42	5.42	5.4	5.43	5.42	5.42	5.4	4.9		
		Amps	11.18	11.16	11.14	11.3	12.79	12.78	12.75	12.9	14.60	14.58	14.56	14.7	16.55	16.54	16.51	16.6	18.73	18.72	18.69	18.8	21.29	21.28	21.25	21.4	21.29	21.28	21.25	21.4	18.8		
Hi PR		269	270	272	276.4	311	312	314	318.3	355	356	358	362.3	402	403	405	409.6	453	454	456	460.6	507	509	510	515.0	507	509	510	515.0	460.6			
Lo PR	126	127	130	135.5	133	135	138	143.0	140	141	144	149.5	145	147	150	155.1	151	152	155	160.5	157	159	162	167.3	157	159	162	167.3	160.5				
1900	MBh	48.4	49.1	50.5	52.6	48.0	48.7	50.1	52.2	46.8	47.5	48.9	51.0	44.7	45.4	46.8	48.9	42.2	42.9	44.2	46.4	39.9	40.5	41.9	44.0	39.9	40.5	41.9	44.0	46.4			
	S/T	1.00	0.89	0.75	0.6	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.88	0.7	0.6			
	ΔT	23.69	21.97	18.77	15.5	23.64	21.93	18.72	15.4	23.88	22.17	18.96	15.6	23.62	21.91	18.71	15.4	23.39	21.68	18.48	15.2	24.47	22.75	19.55	16.2	24.47	22.75	19.55	16.2	15.2			
	kW	3.13	3.12	3.12	3.1	3.50	3.49	3.49	3.5	3.91	3.91	3.90	3.9	4.36	4.36	4.35	4.4	4.86	4.86	4.85	4.9	5.45	5.45	5.44	5.5	5.45	5.45	5.44	5.5	4.9			
	Amps	11.29	11.27	11.25	11.4	12.90	12.89	12.86	13.0	14.71	14.70	14.67	14.8	16.66	16.65	16.62	16.7	18.84	18.83	18.80	18.9	21.40	21.39	21.36	21.5	21.40	21.39	21.36	21.5	18.9			
	Hi PR	272	274	275	280.0	314	315	317	322.0	358	359	361	365.9	406	407	409	413.2	457	458	460	464.2	511	512	514	518.7	511	512	514	518.7	464.2			
Lo PR	129	131	134	138.9	137	138	141	146.4	143	145	148	153.0	149	150	153	158.5	154	156	159	164.0	161	162	166	170.8	161	162	166	170.8	164.0				

85	AIRFLOW	MBh	47.1	47.8	49.2	51.3	46.7	47.4	48.7	50.9	45.5	46.2	47.5	49.7	43.4	44.1	45.5	47.6	40.9	41.5	42.9	45.0	38.6	39.2	40.6	42.7	38.6	39.2	40.6	42.7	45.0
		S/T	1.00	0.85	0.72	0.6	1.00	0.86	0.72	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.83	0.7	1.00	1.00	0.83	0.7	0.6
		ΔT	29.95	28.24	25.03	21.7	29.90	28.19	24.99	21.7	30.14	28.43	25.23	21.9	29.89	28.17	24.97	21.7	29.66	27.94	24.74	21.4	30.73	29.02	25.81	22.5	30.73	29.02	25.81	22.5	21.4
		kW	3.08	3.08	3.07	3.1	3.45	3.45	3.44	3.5	3.87	3.86	3.86	3.9	4.31	4.31	4.30	4.3	4.82	4.81	4.81	4.8	5.40	5.40	5.40	5.4	5.40	5.40	5.40	5.4	4.8
		Amps	11.08	11.07	11.04	11.2	12.70	12.69	12.66	12.8	14.50	14.49	14.46	14.6	16.46	16.44	16.42	16.5	18.64	18.63	18.60	18.7	21.20	21.19	21.16	21.3	21.20	21.19	21.16	21.3	18.7
		Hi PR	267	268	270	274.4	309	310	312	316.4	353	354	356	360.3	400	401	403	407.6	451	452	454	458.6	505	507	508	513.0	505	507	508	513.0	458.6
		Lo PR	125	126	130	134.8	132	134	137	142.3	139	140	144	148.9	145	146	149	154.4	150	151	155	159.9	157	158	161	166.7	157	158	161	166.7	154.4
		MBh	47.9	48.6	50.0	52.1	47.5	48.2	49.6	51.7	46.3	47.0	48.4	50.5	44.2	44.9	46.3	48.4	41.7	42.4	43.7	45.9	39.4	40.0	41.4	43.5	39.4	40.0	41.4	43.5	45.9
		S/T	1.00	0.95	0.81	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.91	0.8	1.00	1.00	0.91	0.8	0.7
		ΔT	28.44	26.72	23.52	20.2	28.39	26.68	23.47	20.2	28.63	26.92	23.71	20.4	28.37	26.66	23.46	20.1	28.14	26.43	23.23	19.9	29.22	27.50	24.30	21.0	29.22	27.50	24.30	21.0	19.9
		kW	3.11	3.10	3.10	3.1	3.48	3.48	3.47	3.5	3.89	3.89	3.88	3.9	4.34	4.34	4.33	4.4	4.84	4.84	4.83	4.9	5.43	5.43	5.42	5.5	5.43	5.43	5.42	5.5	4.9

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI conditions.

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																
70	900	MBh	33.1	33.5	34.5	-	32.8	33.2	34.2	-	31.9	32.4	33.4	-	30.4	30.9	31.9	-	28.6	29.0	30.0	-	26.9	27.4	28.4	-	26.9	27.4	28.4	-	26.9	27.4	28.4	-															
		S/T	0.57	0.49	0.35	-	0.58	0.50	0.36	-	0.60	0.52	0.38	-	1.00	0.54	0.40	-	1.00	0.57	0.43	-	1.00	0.62	0.48	-	1.00	0.62	0.48	-	1.00	0.62	0.48	-															
		ΔT	18.61	16.95	13.86	-	18.56	16.91	13.82	-	18.79	17.14	14.05	-	18.54	16.89	13.80	-	18.32	16.67	13.58	-	19.36	17.71	14.62	-	19.36	17.71	14.62	-	19.36	17.71	14.62	-															
		kW	1.93	1.93	1.92	-	2.16	2.16	2.16	-	2.42	2.42	2.42	-	2.71	2.70	2.70	-	3.02	3.02	3.02	-	3.39	3.39	3.39	-	3.39	3.39	3.39	-	3.39	3.39	3.39	-															
		Amps	6.94	6.93	6.91	-	7.96	7.95	7.93	-	9.09	9.08	9.07	-	10.32	10.31	10.29	-	11.69	11.68	11.67	-	13.30	13.29	13.28	-	13.30	13.29	13.28	-	13.30	13.29	13.28	-															
		Hi PR	253	254	256	-	293	294	296	-	335	336	338	-	380	381	383	-	429	430	432	-	481	482	484	-	481	482	484	-	481	482	484	-															
		Lo PR	126	127	130	-	133	135	138	-	140	142	145	-	146	147	150	-	151	153	156	-	158	160	163	-	158	160	163	-	158	160	163	-															
1125		MBh	33.7	34.2	35.2	-	33.4	33.9	34.9	-	32.6	33.0	34.0	-	31.1	31.5	32.5	-	29.2	29.7	30.7	-	27.6	28.0	29.0	-	27.6	28.0	29.0	-	27.6	28.0	29.0	-															
		S/T	0.68	0.61	0.47	-	0.69	0.61	0.47	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.73	0.59	-	1.00	0.73	0.59	-	1.00	0.73	0.59	-															
		ΔT	16.89	15.24	12.15	-	16.85	15.19	12.10	-	17.08	15.42	12.34	-	16.83	15.18	12.09	-	16.61	14.95	11.86	-	17.64	15.99	12.90	-	17.64	15.99	12.90	-	17.64	15.99	12.90	-															
		kW	1.95	1.95	1.94	-	2.18	2.18	2.18	-	2.44	2.44	2.44	-	2.73	2.73	2.72	-	3.04	3.04	3.04	-	3.41	3.41	3.41	-	3.41	3.41	3.41	-	3.41	3.41	3.41	-															
		Amps	7.03	7.02	7.01	-	8.05	8.04	8.02	-	9.18	9.17	9.16	-	10.41	10.40	10.39	-	11.78	11.77	11.76	-	13.39	13.38	13.37	-	13.39	13.38	13.37	-	13.39	13.38	13.37	-															
		Hi PR	256	257	259	-	296	297	299	-	338	339	341	-	384	385	386	-	432	433	435	-	484	485	487	-	484	485	487	-	484	485	487	-															
		Lo PR	128	130	133	-	136	138	141	-	143	145	148	-	149	150	153	-	154	156	159	-	161	163	166	-	161	163	166	-	161	163	166	-															
1400		MBh	34.8	35.3	36.3	-	34.5	35.0	36.0	-	33.7	34.1	35.1	-	32.2	32.7	33.6	-	30.4	30.8	31.8	-	28.7	29.2	30.2	-	28.7	29.2	30.2	-	28.7	29.2	30.2	-															
		S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.55	-	1.00	0.70	0.57	-	1.00	0.73	0.59	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-															
		ΔT	15.34	13.68	10.59	-	15.29	13.64	10.55	-	15.52	13.87	10.78	-	15.27	13.62	10.53	-	15.05	13.40	10.31	-	16.09	14.43	11.34	-	16.09	14.43	11.34	-	16.09	14.43	11.34	-															
		kW	1.97	1.97	1.96	-	2.20	2.20	2.20	-	2.46	2.46	2.46	-	2.75	2.74	2.74	-	3.06	3.06	3.06	-	3.43	3.43	3.43	-	3.43	3.43	3.43	-	3.43	3.43	3.43	-															
		Amps	7.11	7.10	7.09	-	8.13	8.12	8.10	-	9.26	9.26	9.24	-	10.49	10.48	10.47	-	11.86	11.86	11.84	-	13.47	13.47	13.45	-	13.47	13.47	13.45	-	13.47	13.47	13.45	-															
		Hi PR	260	261	263	-	300	302	303	-	342	344	345	-	388	389	391	-	436	438	439	-	488	490	491	-	488	490	491	-	488	490	491	-															
		Lo PR	133	134	138	-	140	142	145	-	147	149	152	-	153	155	158	-	159	160	163	-	166	167	170	-	166	167	170	-	166	167	170	-															

75	900	MBh	33.1	33.5	34.5	36.1	32.8	33.2	34.2	35.8	31.9	32.4	33.4	34.9	30.4	30.9	31.9	33.4	28.6	29.1	30.0	31.6	26.9	27.4	28.4	29.9
		S/T	0.70	0.62	0.49	0.3	1.00	0.63	0.49	0.3	1.00	0.66	0.52	0.4	1.00	0.68	0.54	0.4	1.00	0.70	0.56	0.4	1.00	1.00	0.61	0.5
		ΔT	22.25	20.59	17.50	14.3	22.20	20.55	17.46	14.3	22.43	20.78	17.69	14.5	22.18	20.53	17.44	14.2	21.96	20.31	17.22	14.0	23.00	21.34	18.25	15.1
		kW	1.93	1.93	1.92	1.9	2.16	2.16	2.16	2.2	2.42	2.42	2.42	2.4	2.70	2.70	2.70	2.7	3.02	3.02	3.01	3.0	3.39	3.39	3.38	3.4
		Amps	6.93	6.93	6.91	7.0	7.95	7.94	7.92	8.0	9.09	9.08	9.06	9.1	10.31	10.31	10.29	10.4	11.69	11.68	11.66	11.7	13.30	13.29	13.27	13.3
		Hi PR	253	254	256	260.2	293	294	296	300.3	335	336	338	342.3	380	381	383	387.5	429	430	432	436.3	481	482	484	488.3
		Lo PR	126	127	130	135.8	133	135	138	143.5	140	142	145	150.2	146	147	151	155.9	151	153	156	161.5	158	160	163	168.5
		MBh	33.7	34.2	35.2	36.7	33.4	33.9	34.9	36.4	32.6	33.0	34.0	35.6	31.1	31.5	32.5	34.1	29.3	29.7	30.7	32.2	27.6	28.1	29.0	30.6
75	1125	S/T	0.82	0.74	0.60	0.5	1.00	0.75	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.73	0.6
		ΔT	20.53	18.88	15.79	12.6	20.48	18.83	15.74	12.5	20.72	19.06	15.97	12.8	20.47	18.81	15.72	12.5	20.25	18.59	15.50	12.3	21.28	19.63	16.54	13.3
		kW	1.95	1.95	1.94	2.0	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.5	2.73	2.72	2.72	2.7	3.04	3.04	3.04	3.1	3.41	3.41	3.41	3.4
		Amps	7.02	7.02	7.00	7.1	8.04	8.03	8.02	8.1	9.18	9.17	9.15	9.2	10.40	10.40	10.38	10.5	11.78	11.77	11.75	11.8	13.39	13.38	13.36	13.4
		Hi PR	256	258	259	263.8	297	298	299	303.9	339	340	341	345.9	384	385	387	391.1	433	434	435	439.8	485	486	487	491.9
		Lo PR	129	130	133	138.7	136	138	141	146.4	143	145	148	153.1	149	150	153	158.9	154	156	159	164.5	161	163	166	171.5
		MBh	34.9	35.3	36.3	37.8	34.6	35.0	36.0	37.6	33.7	34.2	35.2	36.7	32.2	32.7	33.7	35.2	30.4	30.8	31.8	33.4	28.7	29.2	30.2	31.7
		S/T	0.86	0.79	0.65	0.5	1.00	0.79	0.65	0.5	1.00	0.82	0.68	0.5	1.00	0.84	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.77	0.6
1400	1400	ΔT	18.97	17.32	14.23	11.0	18.93	17.27	14.18	11.0	19.16	17.51	14.42	11.2	18.91	17.26	14.17	11.0	18.69	17.04	13.95	10.7	19.73	18.07	14.98	11.8
		kW	1.97	1.97	1.96	2.0	2.20	2.20	2.20	2.2	2.46	2.46	2.46	2.5	2.74	2.74	2.74	2.8	3.06	3.06	3.05	3.1	3.47	3.43	3.42	3.4
		Amps	7.11	7.10	7.08	7.2	8.12	8.11	8.10	8.2	9.26	9.25	9.23	9.3	10.49	10.48	10.46	10.5	11.86	11.85	11.83	11.9	13.47	13.46	13.44	13.5
		Hi PR	261	262	263	267.9	301	302	304	308.0	343	344	346	350.0	388	389	391	395.2	437	438	440	444.0	489	490	492	496.0
		Lo PR	133	134	138	143.0	141	142	145	150.7	147	149	152	157.4	153	155	158	163.2	159	160	163	168.7	166	167	170	175.8

		OUTDOOR AMBIENT TEMPERATURE																ENTERING INDOOR WET BULB TEMPERATURE							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	33.2	33.7	34.7	36.2	32.9	33.4	34.4	35.9	32.1	32.5	33.5	35.1	30.6	31.1	32.0	33.6	28.8	29.2	30.2	31.7	27.1	27.6	28.6	30.1
	S/T	1.00	0.75	0.61	0.5	1.00	0.76	0.62	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.74	0.6
	ΔT	25.91	24.25	21.16	18.0	25.86	24.21	21.12	17.9	26.10	24.44	21.35	18.2	25.85	24.19	21.10	17.9	25.62	23.97	20.88	17.7	26.66	25.01	21.92	18.7
	kW	1.93	1.93	1.93	1.9	2.16	2.16	2.16	2.2	2.42	2.42	2.42	2.4	2.71	2.70	2.70	2.7	3.02	3.02	3.02	3.0	3.39	3.39	3.39	3.4
	Amps	6.94	6.93	6.91	7.0	7.96	7.95	7.93	8.0	9.09	9.08	9.07	9.1	10.32	10.31	10.29	10.4	11.69	11.68	11.67	11.7	13.30	13.29	13.28	13.4
	Hi PR	253	254	256	260.7	293	295	296	300.8	335	337	338	342.8	381	382	384	388.0	429	431	432	436.8	481	483	484	488.8
	Lo PR	126	128	131	136.3	134	135	139	144.0	141	142	145	150.8	146	148	151	156.5	152	153	157	162.1	159	160	164	169.1
	MBh	33.9	34.4	35.4	36.9	33.6	34.1	35.1	36.6	32.7	33.2	34.2	35.7	31.2	31.7	32.7	34.2	29.4	29.9	30.9	32.4	27.8	28.2	29.2	30.7
	S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.86	0.7
	ΔT	24.19	22.54	19.45	16.2	24.15	22.49	19.40	16.2	24.38	22.73	19.64	16.4	24.13	22.48	19.39	16.2	23.91	22.26	19.17	16.0	24.95	23.29	20.20	17.0
1400	kW	1.95	1.95	1.94	2.0	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.5	2.73	2.73	2.72	2.7	3.04	3.04	3.04	3.1	3.41	3.41	3.41	3.4
	Amps	7.03	7.02	7.00	7.1	8.05	8.04	8.02	8.1	9.18	9.17	9.16	9.2	10.41	10.40	10.38	10.5	11.78	11.77	11.76	11.8	13.39	13.38	13.37	13.4
	Hi PR	257	258	260	264.2	297	298	300	304.3	339	340	342	346.3	384	385	387	391.6	433	434	436	440.3	485	486	488	492.3
	Lo PR	129	131	134	139.3	137	138	142	147.0	144	145	148	153.7	149	151	154	159.4	155	156	160	165.0	162	163	167	172.0
	MBh	35.0	35.5	36.5	38.0	34.7	35.2	36.2	37.7	33.9	34.3	35.3	36.9	32.4	32.8	33.8	35.4	30.5	31.0	32.0	33.5	28.9	29.3	30.3	31.9
	S/T	1.00	0.91	0.78	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.8
	ΔT	22.64	20.98	17.89	14.7	22.59	20.94	17.85	14.6	22.82	21.17	18.08	14.9	22.57	20.92	17.83	14.6	22.35	20.70	17.61	14.4	23.39	21.74	18.65	15.4
	kW	1.97	1.97	1.96	2.0	2.20	2.20	2.20	2.2	2.46	2.46	2.46	2.5	2.75	2.74	2.74	2.8	3.06	3.06	3.06	3.1	3.43	3.43	3.43	3.4
	Amps	7.11	7.10	7.09	7.2	8.13	8.12	8.10	8.2	9.26	9.25	9.24	9.3	10.49	10.48	10.47	10.5	11.86	11.86	11.84	11.9	13.47	13.47	13.45	13.5
	Hi PR	261	262	264	268.4	301	302	304	308.5	343	344	346	350.5	388	389	391	395.7	437	438	440	444.5	489	490	492	496.5
	Lo PR	133	135	138	143.6	141	143	146	151.3	148	149	153	158.0	154	155	158	163.7	159	161	164	169.3	166	168	171	176.3

900	MBh	33.8	34.3	35.3	36.8	33.5	34.0	35.0	36.5	32.6	33.1	34.1	35.6	31.1	31.6	32.6	34.1	29.3	29.8	30.8	32.3	27.6	28.1	29.1	30.6
	S/T	1.00	0.86	0.72	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	1.00	0.6	1.00	1.00	1.00	0.7
	ΔT	29.16	27.50	24.41	21.2	29.11	27.46	24.37	21.2	29.34	27.69	24.60	21.4	29.09	27.44	24.35	21.1	28.87	27.22	24.13	20.9	29.91	28.25	25.17	22.0
	kW	1.93	1.93	1.93	1.9	2.17	2.17	2.16	2.2	2.43	2.43	2.42	2.4	2.71	2.71	2.70	2.7	3.03	3.02	3.02	3.0	3.40	3.39	3.39	3.4
	Amps	6.96	6.95	6.93	7.0	7.98	7.97	7.95	8.0	9.11	9.10	9.08	9.2	10.34	10.33	10.31	10.4	11.71	11.70	11.69	11.8	13.32	13.31	13.30	13.4
	Hi PR	255	256	257	261.9	295	296	298	302.0	337	338	340	344.0	382	383	385	389.2	431	432	434	438.0	483	484	486	490.0
	Lo PR	128	130	133	138.2	136	137	141	145.9	142	144	147	152.7	148	150	153	158.4	154	155	159	164.0	161	162	166	171.0
	MBh	34.5	34.9	35.9	37.5	34.2	34.6	35.6	37.2	33.3	33.8	34.8	36.3	31.8	32.3	33.3	34.8	30.0	30.5	31.4	33.0	28.3	28.8	29.8	31.3
	S/T	1.00	0.97	0.83	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
	ΔT	27.44	25.79	22.70	19.5	27.40	25.74	22.65	19.5	27.63	25.97	22.88	19.7	27.38	25.72	22.64	19.4	27.16	25.50	22.41	19.2	28.19	26.54	23.45	20.2
1125	kW	1.95	1.95	1.95	2.0	2.19	2.19	2.18	2.2	2.45	2.45	2.44	2.5	2.73	2.73	2.73	2.7	3.05	3.05	3.04	3.1	3.42	3.42	3.41	3.4
	Amps	7.05	7.04	7.02	7.1	8.07	8.06	8.04	8.1	9.20	9.19	9.18	9.3	10.43	10.42	10.40	10.5	11.80	11.79	11.78	11.9	13.41	13.40	13.39	13.5
	Hi PR	258	259	261	265.4	298	299	301	305.5	340	341	343	347.5	385	387	388	392.7	434	435	437	441.5	486	487	489	493.5
	Lo PR	131	133	136	141.2	139	140	143	148.9	145	147	150	155.6	151	153	156	161.3	157	158	162	166.9	164	165	169	173.9
	MBh	35.6	36.1	37.1	38.6	35.3	35.8	36.8	38.3	34.4	34.9	35.9	37.4	32.9	33.4	34.4	35.9	31.1	31.6	32.6	34.1	29.4	29.9	30.9	32.4
	S/T	1.00	1.00	0.88	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.91	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.9
	ΔT	25.89	24.23	21.14	17.9	25.84	24.19	21.10	17.9	26.07	24.42	21.33	18.1	25.82	24.17	21.08	17.9	25.60	23.95	20.86	17.7	26.64	24.98	21.89	18.7
	kW	1.97	1.97	1.97	2.0	2.21	2.20	2.20	2.2	2.47	2.47	2.46	2.5	2.75	2.75	2.74	2.8	3.07	3.06	3.06	3.1	3.44	3.43	3.43	3.4
	Amps	7.13	7.12	7.11	7.2	8.15	8.14	8.12	8.2	9.28	9.27	9.26	9.3	10.51	10.50	10.49	10.6	11.88	11.87	11.86	11.9	13.49	13.48	13.47	13.5
	Hi PR	262	263	265	269.6	302	303	305	309.7	344	345	347	351.7	390	391	392	396.9	438	439	441	445.7	490	491	493	497.7
	Lo PR	135	137	140	145.5	143	145	148	153.2	150	151	155	159.9	155	157	160	165.6	161	163	166	171.2	168	170	173	178.2

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI conditions.

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	60.5	61.3	63.1	63.1	-	59.9	60.8	62.6	-	58.3	59.2	61.0	-	55.6	56.4	58.3	-	52.2	53.1	54.9	-	49.2	50.0	51.9
	S/T	0.54	0.46	0.3	0.3	-	0.54	0.47	0.3	-	0.57	0.49	0.4	-	1.00	0.51	0.4	-	1.00	0.53	0.4	-	1.00	0.59	0.4
	ΔT	20.93	19.10	15.7	15.7	-	20.88	19.05	15.6	-	21.13	19.30	15.9	-	20.86	19.03	15.6	-	20.61	18.78	15.4	-	21.76	19.93	16.5
	kW	3.56	3.55	3.5	3.5	-	3.97	3.97	4.0	-	4.44	4.44	4.4	-	4.95	4.95	4.9	-	5.52	5.51	5.5	-	6.18	6.18	6.2
	Amps	12.86	12.65	12.6	12.6	-	14.49	14.47	14.4	-	16.52	16.51	16.5	-	18.72	18.71	18.7	-	21.18	21.17	21.1	-	24.07	24.06	24.0
	Hi PR	259	260	262.1	262.1	-	300	301	303.3	-	343	345	346.5	-	390	391	392.9	-	440	441	443.1	-	494	495	496.6
	Lo PR	124	126	129.1	129.1	-	132	134	136.8	-	139	140	143.5	-	144	146	149.1	-	150	152	154.7	-	157	158	161.7
	MBh	61.8	62.7	64.5	64.5	-	61.3	62.2	64.0	-	59.7	60.6	62.4	-	57.0	57.8	59.6	-	53.6	54.5	56.3	-	50.6	51.4	53.2
	S/T	0.68	0.60	0.5	0.5	-	0.68	0.60	0.5	-	0.71	0.63	0.5	-	1.00	0.65	0.5	-	1.00	0.67	0.5	-	1.00	0.72	0.6
	ΔT	18.67	16.84	13.4	13.4	-	18.62	16.79	13.4	-	18.88	17.05	13.6	-	18.60	16.77	13.4	-	18.36	16.53	13.1	-	19.50	17.67	14.3
	kW	3.60	3.60	3.6	3.6	-	4.02	4.02	4.0	-	4.49	4.48	4.5	-	4.99	4.99	5.0	-	5.56	5.56	5.5	-	6.22	6.22	6.2
	Amps	12.86	12.84	12.8	12.8	-	14.68	14.67	14.6	-	16.71	16.70	16.7	-	18.92	18.90	18.9	-	21.38	21.36	21.3	-	24.26	24.25	24.2
1900	Hi PR	263	265	266.4	266.4	-	305	306	307.6	-	348	349	350.7	-	394	395	397.2	-	444	446	447.4	-	498	499	500.8
	Lo PR	128	129	132.5	132.5	-	135	137	140.1	-	142	144	146.8	-	148	149	152.5	-	153	155	158.1	-	160	162	165.0
	MBh	64.3	65.2	67.0	67.0	-	63.8	64.6	66.4	-	62.2	63.0	64.8	-	59.4	60.3	62.1	-	56.1	56.9	58.7	-	53.0	53.9	55.7
	S/T	0.72	0.64	0.5	0.5	-	0.73	0.65	0.5	-	1.00	0.68	0.5	-	1.00	0.69	0.6	-	1.00	0.72	0.6	-	1.00	1.00	0.6
	ΔT	16.71	14.88	11.5	11.5	-	16.66	14.83	11.4	-	16.92	15.09	11.7	-	16.64	14.82	11.4	-	16.40	14.57	11.2	-	17.55	15.72	12.3
	kW	3.64	3.63	3.6	3.6	-	4.06	4.05	4.0	-	4.53	4.52	4.5	-	5.03	5.03	5.0	-	5.60	5.59	5.6	-	6.26	6.26	6.3
	Amps	13.02	13.01	13.0	13.0	-	14.85	14.83	14.8	-	16.88	16.87	16.8	-	19.08	19.07	19.0	-	21.54	21.53	21.5	-	24.43	24.42	24.4
	Hi PR	268	269	271.3	271.3	-	310	311	312.5	-	353	354	355.7	-	399	400	402.2	-	449	450	452.3	-	503	504	505.8
	Lo PR	133	134	137.5	137.5	-	140	142	145.1	-	147	149	151.9	-	153	154	157.5	-	158	160	163.1	-	165	167	170.1

75	MBh	60.5	61.4	63.2	63.2	66.0	60.0	60.8	62.6	65.4	58.4	59.2	61.0	63.8	55.6	56.5	58.3	61.1	52.3	53.1	54.9	57.7	49.2	50.1	51.9
	S/T	0.67	0.59	0.5	0.5	0.31	0.67	0.60	0.5	0.32	1.00	0.62	0.5	0.34	1.00	0.64	0.5	0.36	1.00	0.67	0.5	0.38	1.00	1.00	0.6
	ΔT	24.95	23.12	19.7	19.7	16.17	24.90	23.07	19.7	16.12	25.15	23.33	19.9	16.37	24.88	23.05	19.6	16.10	24.63	22.80	19.4	15.85	25.78	23.95	20.5
	kW	3.55	3.55	3.5	3.5	3.57	3.97	3.97	4.0	3.99	4.44	4.44	4.4	4.46	4.95	4.94	4.9	4.97	5.51	5.51	5.5	5.53	6.18	6.17	6.2
	Amps	12.65	12.64	12.6	12.6	12.75	14.47	14.46	14.4	14.57	16.51	16.49	16.5	16.60	18.71	18.70	18.7	18.81	21.17	21.16	21.1	21.27	24.06	24.04	24.0
	Hi PR	259	260	262.3	262.3	267	301	302	303.5	308	344	345	346.7	351	390	391	393.2	398	440	441	443.3	448	494	495	496.8
	Lo PR	124	126	129.1	129.1	134	132	134	136.8	142	139	140	143.5	149	144	146	149.2	155	150	152	154.7	160	157	158	161.7
	MBh	61.9	62.7	64.6	64.6	67.4	61.3	62.2	64.0	66.8	59.7	60.6	62.4	65.2	57.0	57.9	59.7	62.5	53.6	54.5	56.3	59.1	50.6	51.4	53.3
	S/T	0.81	0.73	0.6	0.6	0.45	1.00	0.74	0.6	0.45	1.00	0.76	0.6	0.48	1.00	0.78	0.6	0.50	1.00	1.00	0.7	0.52	1.00	1.00	0.7
	ΔT	22.69	20.86	17.4	17.4	13.91	22.64	20.81	17.4	13.86	22.90	21.07	17.7	14.12	22.62	20.79	17.4	13.84	22.38	20.55	17.1	13.60	23.52	21.69	18.3
	kW	3.60	3.59	3.6	3.6	3.62	4.02	4.01	4.0	4.04	4.48	4.48	4.5	4.51	4.99	4.99	5.0	5.01	5.56	5.55	5.5	5.58	6.22	6.22	6.2
	Amps	12.84	12.83	12.8	12.8	12.94	14.67	14.65	14.6	14.76	16.70	16.69	16.7	16.80	18.89	18.89	18.9	19.00	21.37	21.35	21.3	21.46	24.25	24.24	24.2
1700	Hi PR	264	265	266.6	266.6	271	305	306	307.8	312	348	349	351.0	356	394	396	397.5	402	445	446	447.6	452	498	499	501.1
	Lo PR	128	129	132.5	132.5	138	135	137	140.1	146	142	144	146.8	152	148	149	152.5	158	153	155	158.1	163	160	162	165.0
	MBh	64.3	65.2	67.0	67.0	69.8	63.8	64.6	66.5	69.3	62.2	63.1	64.9	67.7	59.4	60.3	62.1	64.9	56.1	57.0	58.8	61.6	53.0	53.9	55.7
	S/T	0.85	0.77	0.6	0.6	0.49	1.00	0.78	0.6	0.50	1.00	0.81	0.7	0.52	1.00	0.83	0.7	0.54	1.00	1.00	0.7	0.57	1.00	1.00	0.8
	ΔT	20.73	18.91	15.5	15.5	11.95	20.68	18.86	15.4	11.90	20.94	19.11	15.7	12.16	20.67	18.84	15.4	11.89	20.42	18.59	15.2	11.64	21.57	19.74	16.3
	kW	3.64	3.63	3.6	3.6	3.66	4.05	4.05	4.0	4.08	4.52	4.52	4.5	4.54	5.03	5.03	5.0	5.05	5.60	5.59	5.6	5.62	6.26	6.26	6.2
	Amps	13.01	13.00	13.0	13.0	13.10	14.83	14.82	14.8	14.93	16.87	16.85	16.8	16.96	19.07	19.06	19.0	19.16	21.53	21.52	21.5	21.63	24.42	24.40	24.4
	Hi PR	269	270	271.5	271.5	276	310	311	312.7	317	353	354	355.9	360	399	401	402.4	407	450	451	452.5	457	503	504	506.0
	Lo PR	133	134	137.5	137.5	143	140	142	145.2	151	147	149	151.9	157	153	154	157.6	163	158	160	163.1	168	165	167	170.1

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.
Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHR 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.
Shaded area reflects ACCA (TVA) conditions.
kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
		65°F						75°F						85°F						95°F						105°F						115°F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203	207	211	215	219	223	227	231	235	239	243	247	251	255	259	263	267	271	275	279	283	287	291	295	299	303	307	311	315	319	323	327	331	335	339	343	347	351	355	359	363	367	371	375	379	383	387	391	395	399	403	407	411	415	419	423	427	431	435	439	443	447	451	455	459	463	467	471	475	479	483	487	491	495	499	503	507	511	515	519	523	527	531	535	539	543	547	551	555	559	563	567	571	575	579	583	587	591	595	599	603	607	611	615	619	623	627	631	635	639	643	647	651	655	659	663	667	671	675	679	683	687	691	695	699	703	707	711	715	719	723	727	731	735	739	743	747	751	755	759	763	767	771	775	779	783	787	791	795	799	803	807	811	815	819	823	827	831	835	839	843	847	851	855	859	863	867	871	875	879	883	887	891	895	899	903	907	911	915	919	923	927	931	935	939	943	947	951	955	959	963	967	971	975	979	983	987	991	995	999	1003	1007	1011	1015	1019	1023	1027	1031	1035	1039	1043	1047	1051	1055	1059	1063	1067	1071	1075	1079	1083	1087	1091	1095	1099	1103	1107	1111	1115	1119	1123	1127	1131	1135	1139	1143	1147	1151	1155	1159	1163	1167	1171	1175	1179	1183	1187	1191	1195	1199	1203	1207	1211	1215	1219	1223	1227	1231	1235	1239	1243	1247	1251	1255	1259	1263	1267	1271	1275	1279	1283	1287	1291	1295	1299	1303	1307	1311	1315	1319	1323	1327	1331	1335	1339	1343	1347	1351	1355	1359	1363	1367	1371	1375	1379	1383	1387	1391	1395	1399	1403	1407	1411	1415	1419	1423	1427	1431	1435	1439	1443	1447	1451	1455	1459	1463	1467	1471	1475	1479	1483	1487	1491	1495	1499	1503	1507	1511	1515	1519	1523	1527	1531	1535	1539	1543	1547	1551	1555	1559	1563	1567	1571	1575	1579	1583	1587	1591	1595	1599	1603	1607	1611	1615	1619	1623	1627	1631	1635	1639	1643	1647	1651	1655	1659	1663	1667	1671	1675	1679	1683	1687	1691	1695	1699	1703	1707	1711	1715	1719	1723	1727	1731	1735	1739	1743	1747	1751	1755	1759	1763	1767	1771	1775	1779	1783	1787	1791	1795	1799	1803	1807	1811	1815	1819	1823	1827	1831	1835	1839	1843	1847	1851	1855	1859	1863	1867	1871	1875	1879	1883	1887	1891	1895	1899	1903	1907	1911	1915	1919	1923	1927	1931	1935	1939	1943	1947	1951	1955	1959	1963	1967	1971	1975	1979	1983	1987	1991	1995	1999	2003	2007	2011	2015	2019	2023	2027	2031	2035	2039	2043	2047	2051	2055	2059	2063	2067	2071	2075	2079	2083	2087	2091	2095	2099	2103	2107	2111	2115	2119	2123	2127	2131	2135	2139	2143	2147	2151	2155	2159	2163	2167	2171	2175	2179	2183	2187	2191	2195	2199	2203	2207	2211	2215	2219	2223	2227	2231	2235	2239	2243	2247	2251	2255	2259	2263	2267	2271	2275	2279	2283	2287	2291	2295	2299	2303	2307	2311	2315	2319	2323	2327	2331	2335	2339	2343	2347	2351	2355	2359	2363	2367	2371	2375	2379	2383	2387	2391	2395	2399	2403	2407	2411	2415	2419	2423	2427	2431	2435	2439	2443	2447	2451	2455	2459	2463	2467	2471	2475	2479	2483	2487	2491	2495	2499	2503	2507	2511	2515	2519	2523	2527	2531	2535	2539	2543	2547	2551	2555	2559	2563	2567	2571	2575	2579	2583	2587	2591	2595	2599	2603	2607	2611	2615	2619	2623	2627	2631	2635	2639	2643	2647	2651	2655	2659	2663	2667	2671	2675	2679	2683	2687	2691	2695	2699	2703	2707	2711	2715	2719	2723	2727	2731	2735	2739	2743	2747	2751	2755	2759	2763	2767	2771	2775	2779	2783	2787	2791	2795	2799	2803	2807	2811	2815	2819	2823	2827	2831	2835	2839	2843	2847	2851	2855	2859	2863	2867	2871	2875	2879	2883	2887	2891	2895	2899	2903	2907	2911	2915	2919	2923	2927	2931	2935	2939	2943	2947	2951	2955	2959	2963	2967	2971	2975	2979	2983	2987	2991	2995	2999	3003	3007	3011	3015	3019	3023	3027	3031	3035	3039	3043	3047	3051	3055	3059	3063	3067	3071	3075	3079	3083	3087	3091	3095	3099	3103	3107	3111	3115	3119	3123	3127	3131	3135	3139	3143	3147	3151	3155	3159	3163	3167	3171	3175	3179	3183	3187	3191	3195	3199	3203	3207	3211	3215	3219	3223	3227	3231	3235	3239	3243	3247	3251	3255	3259	3263	3267	3271	3275	3279	3283	3287	3291	3295	3299	3303	3307	3311	3315	3319	3323	3327	3331	3335	3339	3343	3347	3351	3355	3359	3363	3367	3371	3375	3379	3383	3387	3391	3395	3399	3403	3407	3411	3415	3419	3423	3427	3431	3435	3439	3443	3447	3451	3455	3459	3463	3467	3471	3475	3479	3483	3487	3491	3495	3499	3503	3507	3511	3515	3519	3523	3527	3531	3535	3539	3543	3547	3551	3555	3559	3563	3567	3571	3575	3579	3583	3587	3591	3595	3599	3603	3607	3611	3615	3619	3623	3627	3631	3635	3639	3643	3647	3651	3655	3659	3663	3667	3671	3675	3679	3683	3687	3691	3695	3699	3703	3707	3711	3715	3719	3723	3727	3731	3735	3739	3743	3747	3751	3755	3759	3763	3767	3771	3775	3779	3783	3787	3791	3795	3799	3803	3807	3811	3815	3819	3823	3827	3831	3835	3839	3843	3847	3851	3855	3859	3863	3867	3871	3875	3879	3883	3887	3891	3895	3899	3903	3907	3911	3915	3919	3923	3927	3931	3935	3939	3943	3947	3951	3955	3959	3963	3967	3971	3975	3979	3983	3987	3991	3995	3999	4003	4007	4011	4015	4019	4023	4027	4031	4035	4039	4043	4047	4051	4055	4059	4063	4067	4071	4075	4079	4083	4087	4091	4095	4099	4103	4107	4111	4115	4119	4123	4127	4131	4135	4139	4143	4147	4151	4155	4159	4163	4167	4171	4175	4179	4183	4187	4191	4195	4199	4203	4207	4211	4215	4219	4223	4227	4231	4235	4239	4243	4247	4251	4255	4259	4263	4267	4271	4275	4279	4283	4287	4291	4295	4299	4303	4307	4311	4315	4319	4323	4327	4331	4335	4339	4343	4347	4351	4355	4359	4363	4367	4371	4375	4379	4383	4387	4391	4395	4399	4403	4407	4411	4415	4419	4423	4427	4431	4435	4439	4443	4447	4451	4455	4459	4463	4467	4471	4475	4479	4483	4487	4491	4495	4499	4503	4507	4511	4515	4519	4523	4527	4531	4535	4539	4543	4547	4551	4555	4559	4563	4567	4571	4575	4579	4583	4587	4591	4595	4599	4603	4607	4611	4615	4619	4623	4627	4631	4635	4639	4643	4647	4651	4655	4659	4663	4667	4671	4675	4679	4683	4687	4691	4695	4699	4703	4707	4711	4715	4719	4723	4727	4731	4735	4739	4743	4747	4751	4755	4759	4763	4767	4771	4775	4779	4783	4787	4791	4795	4799	4803	4807	4811	4815	4819	4823	4827	4831	4835	4839	4843	4847	4851	4855	4859	4863	4867	4871	4875	4879	4883	4887	4891	4895	4899	4903	4907	4911	4915	4919	4923	4927	4931	4935	4939	4943	4947	4951	4955	4959	4963	4967	4971	4975	4979	4983	4987	4991	4995	4999	5003	5007	5011	5015	5019	5023	5027	5031	5035	5039	5043	5047	5051	5055	5059	5063	5067	5071	5075	5079	5083	5087	5091	5095	5099	5103	5107	5111	5115	5119	5123	5127	5131	5135	5139	5143	5147	5151	5155	5159	5163	5167	5171	5175	5179	5183	5187	5191	5195	5199	5203	5207	5211	5215	5219	5223	5227	5231	5235	5239	5243	5247	5251	5255	5259	5263	5267	5271	5275	5279	5283	5287	5291	5295	5299	5303	5307	5311	5315	5319	5323	5327	5331	5335	5339	5343	5347	5351	5355	5359	5363	5367	5371	5375	5379	5383	5387	5391	5395	5399	5403	5407	5411	5415	5419	5423	5427	5431	5435	5439	5443	5447	5451	5455	5459	5463	5467	5471	5475	5479	5483	5487	5491	5495	5499	5503	5507	5511	5515	5519	5523	5527	5531	5535	5539	5543	5547	5551	5555	5559	5563	5567	5571	5575	5579	5583	5587	5591	5595	5599	5603	5607	5611	5615</

85	1500	MBh	61.8	62.7	64.5	67.3	61.3	62.2	64.0	66.8	59.7	60.6	62.4	65.2	57.0	57.8	59.6	62.4	53.6	54.5	56.3	59.1	50.5	51.4	53.2	56.0
		S/T	1.00	0.82	0.68	0.5	1.00	1.00	0.69	0.5	1.00	1.00	1.00	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.7
		ΔT	32.59	30.76	27.34	23.8	32.54	30.71	27.29	23.8	32.79	30.96	27.55	24.0	32.52	30.69	27.27	23.7	32.27	30.44	27.03	23.5	33.42	31.59	28.17	24.6
		kW	3.56	3.56	3.55	3.6	3.98	3.98	3.97	4.0	4.45	4.45	4.44	4.5	4.96	4.95	4.95	5.0	5.52	5.52	5.51	5.5	6.19	6.18	6.18	6.2
		Amps	12.70	12.68	12.65	12.8	14.52	14.50	14.47	14.6	16.55	16.54	16.51	16.6	18.76	18.74	18.71	18.8	21.22	21.20	21.17	21.3	24.10	24.09	24.06	24.2
		Hi PR	261	262	264	268.6	302	303	305	309.8	345	347	348	353.0	392	393	395	399.4	442	443	445	449.6	496	497	499	503.1
		Lo PR	127	128	132	136.9	134	136	139	144.6	141	143	146	151.3	147	148	152	157.0	152	154	157	162.5	159	161	164	169.5
	1700	MBh	63.2	64.1	65.9	68.7	62.7	63.5	65.4	68.2	61.1	61.9	63.8	66.6	58.3	59.2	61.0	63.8	55.0	55.9	57.7	60.5	51.9	52.8	54.6	57.4
		S/T	1.00	0.96	0.82	0.7	1.00	1.00	0.83	0.7	1.00	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8	1.00	1.00	0.8
		ΔT	30.33	28.50	25.08	21.5	30.28	28.45	25.03	21.5	30.53	28.71	25.29	21.8	30.26	28.43	25.02	21.5	30.01	28.19	24.77	21.2	31.16	29.33	25.92	22.4
kW		3.61	3.60	3.60	3.6	4.03	4.02	4.02	4.0	4.49	4.49	4.48	4.5	5.00	5.00	4.99	5.0	5.57	5.56	5.56	5.6	6.23	6.23	6.22	6.3	
Amps		12.89	12.87	12.84	13.0	14.71	14.70	14.67	14.8	16.75	16.73	16.70	16.8	18.95	18.93	18.90	19.0	21.41	21.40	21.36	21.5	24.30	24.28	24.25	24.4	
Hi PR		265	266	268	272.8	307	308	310	314.1	350	351	353	357.2	396	397	399	403.7	446	447	449	453.8	500	501	503	507.3	
Lo PR		130	132	135	140.3	138	139	143	147.9	145	146	149	154.6	150	152	155	160.3	156	157	161	165.9	163	164	167	172.9	
1900	MBh	65.7	66.5	68.4	71.1	65.1	66.0	67.8	70.6	63.5	64.4	66.2	69.0	60.8	61.7	63.5	66.3	57.4	58.3	60.1	62.9	54.4	55.2	57.1	59.9	
	S/T	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.90	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	0.8	
	ΔT	28.37	26.54	23.13	19.6	28.32	26.49	23.08	19.5	28.58	26.75	23.34	19.8	28.30	26.48	23.06	19.5	28.06	26.23	22.82	19.3	29.20	27.38	23.96	20.4	
	kW	3.65	3.64	3.64	3.7	4.07	4.06	4.05	4.1	4.53	4.53	4.52	4.6	5.04	5.04	5.03	5.1	5.61	5.60	5.59	5.6	6.27	6.27	6.26	6.3	
	Amps	13.06	13.04	13.01	13.1	14.88	14.86	14.83	15.0	16.91	16.90	16.87	17.0	19.12	19.10	19.07	19.2	21.58	21.56	21.53	21.7	24.46	24.45	24.42	24.6	
	Hi PR	270	271	273	277.8	311	313	314	319.0	355	356	358	362.2	401	402	404	408.7	451	452	454	458.8	505	506	508	512.3	
	Lo PR	135	137	140	145.3	143	144	148	153.0	150	151	154	159.7	155	157	160	165.4	161	162	166	166	168	169	173	177.9	

DB: Entering Indoor Dry Bulb Temperature High and low pressures are measured at the liquid and suction access fittings.	Shaded area reflects AHRI conditions.	kW = Total system power Amps = outdoor unit amps (comp.+fan)
--	---------------------------------------	---

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1500	MBh	43.5	44.2	45.5	-	43.2	43.8	45.1	-	42.0	42.6	43.9	-	40.0	40.7	42.0	-	37.6	38.2	39.6	-	35.4	36.0	37.4	-
		S/T	0.57	0.49	0.35	-	0.58	0.50	0.36	-	0.60	0.52	0.38	-	1.00	0.54	0.40	-	1.00	0.57	0.42	-	1.00	0.62	0.48	-
		ΔT	19.96	18.20	14.90	-	19.91	18.15	14.85	-	20.16	18.40	15.10	-	19.89	18.13	14.84	-	19.66	17.89	14.60	-	20.76	19.00	15.70	-
		kW	2.24	2.24	2.23	-	2.50	2.50	2.50	-	2.80	2.80	2.79	-	3.12	3.11	3.11	-	3.47	3.47	3.47	-	3.89	3.89	3.88	-
		Amps	7.98	7.97	7.95	-	9.12	9.12	9.10	-	10.40	10.40	10.38	-	11.79	11.78	11.76	-	13.34	13.33	13.31	-	15.15	15.14	15.12	-
	1700	Hi PR	248	249	251	-	287	289	290	-	329	330	332	-	373	374	376	-	421	422	424	-	472	473	475	-
		Lo PR	128	130	133	-	136	138	141	-	143	144	148	-	149	150	154	-	154	156	159	-	162	163	166	-
		MBh	44.5	45.1	46.4	-	44.1	44.7	46.0	-	42.9	43.5	44.9	-	41.0	41.6	42.9	-	38.5	39.2	40.5	-	36.3	37.0	38.3	-
		S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	1.00	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	1.00	0.60	-
		ΔT	18.02	16.25	12.96	-	17.97	16.20	12.91	-	18.22	16.45	13.16	-	17.95	16.18	12.89	-	17.71	15.95	12.65	-	18.82	17.05	13.76	-
1900	kW	2.26	2.26	2.26	-	2.53	2.53	2.52	-	2.82	2.82	2.82	-	3.14	3.14	3.13	-	3.50	3.49	3.49	-	3.91	3.91	3.91	-	
	Amps	8.09	8.08	8.06	-	9.23	9.22	9.20	-	10.51	10.50	10.48	-	11.90	11.89	11.87	-	13.45	13.44	13.42	-	15.26	15.25	15.23	-	
	Hi PR	252	253	255	-	291	292	294	-	332	334	335	-	377	378	380	-	425	426	428	-	476	477	479	-	
	Lo PR	131	133	136	-	139	141	144	-	146	148	151	-	152	153	157	-	158	159	162	-	165	166	170	-	
	MBh	46.5	47.1	48.4	-	46.1	46.7	48.0	-	45.0	45.6	46.9	-	43.0	43.6	44.9	-	40.6	41.2	42.5	-	38.4	39.0	40.3	-	
1900	S/T	0.74	0.66	0.52	-	1.00	0.67	0.52	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	1.00	0.59	-	1.00	1.00	0.65	-	
	ΔT	15.93	14.16	10.87	-	15.88	14.12	10.82	-	16.13	14.36	11.07	-	15.86	14.10	10.80	-	15.63	13.86	10.57	-	16.73	14.97	11.67	-	
	kW	2.29	2.29	2.28	-	2.55	2.55	2.55	-	2.85	2.85	2.84	-	3.17	3.17	3.16	-	3.52	3.52	3.52	-	3.94	3.94	3.93	-	
	Amps	8.20	8.19	8.17	-	9.35	9.34	9.32	-	10.63	10.62	10.60	-	12.01	12.01	11.99	-	13.56	13.55	13.53	-	15.38	15.37	15.35	-	
	Hi PR	257	258	260	-	297	298	299	-	338	339	341	-	382	383	385	-	430	431	433	-	481	482	484	-	
Lo PR	137	139	142	-	145	147	150	-	152	154	157	-	158	159	163	-	163	165	168	-	171	172	176	-		

75	1500	MBh	43.6	44.2	45.5	47.5	43.2	43.8	45.1	47.1	42.0	42.7	44.0	46.0	40.1	40.7	42.0	44.0	37.7	38.3	39.6	41.6	35.5	36.1	37.4	39.4
		S/T	0.70	0.62	0.48	0.3	1.00	0.63	0.49	0.3	1.00	0.66	0.52	0.4	1.00	0.68	0.54	0.4	1.00	1.00	0.56	0.4	1.00	1.00	0.61	0.5
		ΔT	23.84	22.08	18.78	15.4	23.79	22.03	18.73	15.3	24.04	22.28	18.98	15.6	23.77	22.01	18.72	15.3	23.54	21.77	18.48	15.1	24.64	22.88	19.58	16.2
		kW	2.24	2.24	2.23	2.3	2.50	2.50	2.49	2.5	2.80	2.79	2.79	2.8	3.11	3.11	3.11	3.1	3.47	3.47	3.46	3.5	3.89	3.89	3.88	3.9
		Amps	7.97	7.96	7.94	8.0	9.12	9.11	9.09	9.2	10.40	10.39	10.37	10.5	11.78	11.77	11.75	11.8	13.33	13.32	13.30	13.4	15.15	15.14	15.12	15.2
		Hi PR	248	249	251	255.5	288	289	291	294.9	329	330	332	336.2	373	375	376	380.6	421	422	424	428.5	472	474	475	479.7
		Lo PR	128	130	133	138.6	136	138	141	146.4	143	145	148	153.3	149	150	154	159.1	154	156	159	164.9	162	163	167	172.0
		MBh	44.5	45.1	46.4	48.4	44.1	44.7	46.0	48.0	43.0	43.6	44.9	46.9	41.0	41.6	42.9	44.9	38.6	39.2	40.5	42.5	36.4	37.0	38.3	40.3
		S/T	0.83	0.75	0.61	0.5	1.00	0.76	0.61	0.5	1.00	0.78	0.64	0.5	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.74	0.6
		ΔT	21.90	20.13	16.84	13.4	21.85	20.08	16.79	13.4	22.10	20.33	17.04	13.6	21.83	20.06	16.77	13.4	21.59	19.83	16.53	13.1	22.70	20.93	17.64	14.2
1700		kW	2.26	2.26	2.26	2.3	2.53	2.52	2.52	2.5	2.82	2.82	2.81	2.8	3.14	3.13	3.13	3.2	3.50	3.49	3.49	3.5	3.91	3.91	3.91	3.9
		Amps	8.08	8.07	8.05	8.1	9.23	9.22	9.20	9.3	10.51	10.50	10.48	10.6	11.89	11.88	11.86	12.0	13.44	13.43	13.41	13.5	15.25	15.25	15.23	15.3
		Hi PR	252	253	255	259.2	291	292	294	298.6	333	334	336	339.9	377	378	380	384.3	425	426	428	432.2	476	477	479	483.4
		Lo PR	131	133	136	141.7	139	141	144	149.6	146	148	151	156.5	152	153	157	162.3	158	159	163	168.0	165	166	170	175.2
		MBh	46.5	47.1	48.4	50.5	46.1	46.7	48.1	50.1	45.0	45.6	46.9	48.9	43.0	43.6	44.9	46.9	40.6	41.2	42.5	44.5	38.4	39.0	40.3	42.3
		S/T	1.00	0.79	0.65	0.5	1.00	0.80	0.66	0.5	1.00	0.83	0.68	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.73	0.6	1.00	1.00	1.00	0.6
		ΔT	19.81	18.04	14.75	11.3	19.76	18.00	14.70	11.3	20.01	18.24	14.95	11.5	19.74	17.98	14.68	11.3	19.51	17.74	14.45	11.0	20.61	18.85	15.55	12.1
		kW	2.29	2.29	2.28	2.3	2.55	2.55	2.55	2.6	2.85	2.85	2.84	2.9	3.17	3.16	3.16	3.2	3.52	3.52	3.52	3.5	3.94	3.94	3.93	4.0
		Amps	8.19	8.19	8.17	8.3	9.34	9.33	9.31	9.4	10.62	10.61	10.59	10.7	12.01	12.00	11.98	12.1	13.55	13.55	13.53	13.6	15.37	15.36	15.34	15.4
		Hi PR	257	258	260	264.5	297	298	300	303.9	338	339	341	345.2	382	384	385	389.7	430	431	433	437.6	482	483	484	488.7
		Lo PR	137	139	142	147.6	145	147	150	155.5	152	154	157	162.4	158	159	163	168.2	164	165	168	173.9	171	172	176	181.1

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling 8 ±2 °F @ the liquid access fitting connection AHRI 95 test conditions. Design Superheat 15 ±2 °F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions.

kW = Total system power

Amps = outdoor unit amps (comp.+fan)

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																							
				65°F				75°F				85°F				95°F				105°F				115°F			
				ENTERING INDOOR WET BULB TEMPERATURE																							
80	1500	MBh	43.8	44.4	45.7	47.7	43.4	44.0	45.3	47.3	42.3	42.9	44.2	46.2	40.3	40.9	42.2	44.2	37.9	38.5	39.8	41.8	35.7	36.3	37.6	39.6	
		S/T	1.00	0.76	0.61	0.5	1.00	0.76	0.62	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	1.00	0.6	
		ΔT	27.75	25.98	22.69	19.3	27.70	25.93	22.64	19.2	27.95	26.18	22.89	19.5	27.68	25.92	22.62	19.2	27.45	25.68	22.39	19.0	28.55	26.79	23.49	20.1	
		kW	2.24	2.24	2.23	2.3	2.50	2.50	2.50	2.5	2.80	2.80	2.79	2.8	3.12	3.11	3.11	3.1	3.47	3.47	3.47	3.5	3.89	3.89	3.88	3.9	
		Amps	7.98	7.97	7.95	8.0	9.12	9.11	9.09	9.2	10.40	10.39	10.37	10.5	11.79	11.78	11.76	11.8	13.34	13.33	13.31	13.4	15.15	15.14	15.12	15.2	
		Hi PR	249	250	252	256.0	288	289	291	295.4	329	331	332	336.6	374	375	377	381.1	422	423	425	429.0	473	474	476	480.1	
		Lo PR	129	130	134	139.1	137	138	141	147.0	143	145	148	153.9	149	151	154	159.7	155	157	160	165.4	162	164	167	172.6	
		1700	MBh	44.7	45.3	46.7	48.7	44.3	44.9	46.3	48.3	43.2	43.8	45.1	47.1	41.2	41.8	43.1	45.1	38.8	39.4	40.7	42.7	36.6	37.2	38.5	40.5
S/T	1.00		0.88	0.74	0.6	1.00	0.89	0.74	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	1.00	0.7		
ΔT	25.80		24.04	20.74	17.3	25.75	23.99	20.69	17.3	26.00	24.24	20.94	17.5	25.74	23.97	20.68	17.3	25.50	23.74	20.44	17.0	26.60	24.84	21.54	18.1		
kW	2.26		2.26	2.26	2.3	2.53	2.53	2.52	2.5	2.82	2.82	2.82	2.8	3.14	3.14	3.13	3.2	3.50	3.49	3.49	3.5	3.91	3.91	3.91	3.9		
Amps	8.09		8.08	8.06	8.1	9.23	9.22	9.20	9.3	10.51	10.50	10.48	10.6	11.90	11.89	11.87	12.0	13.44	13.44	13.42	13.5	15.26	15.25	15.23	15.3		
Hi PR	252		254	255	259.7	292	293	295	299.1	333	334	336	340.3	378	379	380	384.8	426	427	428	432.7	477	478	479	483.8		
Lo PR	132		133	137	142.3	140	141	145	150.1	147	148	152	157.0	152	154	157	162.9	158	160	163	168.6	165	167	170	175.8		
1900	MBh		46.7	47.4	48.7	50.7	46.4	47.0	48.3	50.3	45.2	45.8	47.1	49.1	43.2	43.9	45.2	47.2	40.8	41.4	42.8	44.8	38.6	39.2	40.6	42.6	
	S/T	1.00	0.92	0.78	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.8		
	ΔT	23.71	21.95	18.66	15.2	23.67	21.90	18.61	15.2	23.91	22.15	18.86	15.4	23.65	21.88	18.59	15.2	23.41	21.65	18.35	14.9	24.52	22.75	19.46	16.0		
	kW	2.29	2.29	2.28	2.3	2.55	2.55	2.55	2.6	2.85	2.85	2.84	2.9	3.17	3.17	3.16	3.2	3.52	3.52	3.52	3.5	3.94	3.94	3.93	4.0		
	Amps	8.20	8.19	8.17	8.3	9.35	9.34	9.32	9.4	10.63	10.62	10.60	10.7	12.01	12.00	11.98	12.1	13.56	13.55	13.53	13.6	15.38	15.37	15.35	15.4		
	Hi PR	258	259	261	265.0	297	298	300	304.4	338	340	341	345.7	383	384	386	390.1	431	432	434	438.0	482	483	485	489.2		
	Lo PR	138	139	143	148.2	146	147	151	156.1	153	154	157	163.0	158	160	163	168.8	164	166	169	174.5	171	173	176	181.7		

85	1500	MBh	44.5	45.2	46.5	48.5	44.1	44.8	46.1	48.1	43.0	43.6	44.9	46.9	41.0	41.7	43.0	45.0	38.6	39.2	40.6	42.6	36.4	37.0	38.4	40.4
		S/T	1.00	0.86	0.72	0.6	1.00	1.00	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	1.00	0.6	1.00	1.00	1.00	0.7
		ΔT	31.21	29.45	26.15	22.7	31.16	29.40	26.10	22.7	31.41	29.65	26.35	22.9	31.15	29.38	26.09	22.7	30.91	29.15	25.85	22.4	32.01	30.25	26.96	23.5
		kW	2.24	2.24	2.24	2.3	2.51	2.51	2.50	2.5	2.80	2.80	2.80	2.8	3.12	3.12	3.11	3.1	3.48	3.47	3.47	3.5	3.89	3.89	3.89	3.9
		Amps	8.00	7.99	7.97	8.1	9.15	9.14	9.12	9.2	10.43	10.42	10.40	10.5	11.81	11.80	11.78	11.9	13.36	13.35	13.33	13.4	15.17	15.16	15.15	15.2
		Hi PR	250	251	253	257.1	289	290	292	296.5	331	332	333	337.8	375	376	378	382.3	423	424	426	430.2	474	475	477	481.3
		Lo PR	131	132	136	141.1	139	140	143	148.9	145	147	150	155.8	151	153	156	161.7	157	159	162	167.4	164	166	169	174.5
		MBh	45.5	46.1	47.4	49.4	45.1	45.7	47.0	49.0	43.9	44.5	45.9	47.9	41.9	42.6	43.9	45.9	39.5	40.2	41.5	43.5	37.3	38.0	39.3	41.3
1700	S/T	1.00	0.98	0.84	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.88	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	
	ΔT	29.27	27.50	24.21	20.8	29.22	27.45	24.16	20.7	29.47	27.70	24.41	21.0	29.20	27.44	24.14	20.7	28.96	27.20	23.90	20.5	30.07	28.30	25.01	21.6	
	kW	2.27	2.27	2.26	2.3	2.53	2.53	2.53	2.5	2.83	2.83	2.82	2.8	3.15	3.14	3.14	3.2	3.50	3.50	3.50	3.5	3.92	3.92	3.91	3.9	
	Amps	8.11	8.10	8.08	8.2	9.25	9.24	9.23	9.3	10.53	10.52	10.51	10.6	11.92	11.91	11.89	12.0	13.47	13.46	13.44	13.5	15.28	15.27	15.25	15.3	
	Hi PR	254	255	256	260.8	293	294	296	300.2	334	335	337	341.5	379	380	382	386.0	427	428	430	433.9	478	479	481	485.0	
	Lo PR	134	135	139	144.2	142	143	147	152.1	149	150	153	159.0	154	156	159	164.8	160	162	165	170.5	167	169	172	177.7	
	1900	MBh	47.5	48.1	49.4	51.4	47.1	47.7	49.0	51.0	45.9	46.6	47.9	49.9	44.0	44.6	45.9	47.9	41.6	42.2	43.5	45.5	39.4	40.0	41.3	43.3
		S/T	1.00	1.00	0.89	0.7	1.00	1.00	0.89	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	1.0
ΔT		27.18	25.41	22.12	18.7	27.13	25.37	22.07	18.7	27.38	25.61	22.32	18.9	27.11	25.35	22.05	18.6	26.88	25.11	21.82	18.4	27.98	26.22	22.92	19.5	
kW		2.30	2.29	2.29	2.3	2.56	2.56	2.55	2.6	2.85	2.85	2.85	2.9	3.17	3.17	3.17	3.2	3.53	3.53	3.52	3.5	3.95	3.94	3.94	4.0	
Amps		8.22	8.21	8.19	8.3	9.37	9.36	9.34	9.4	10.65	10.64	10.62	10.7	12.03	12.03	12.01	12.1	13.58	13.57	13.55	13.6	15.40	15.39	15.37	15.5	
Hi PR		259	260	262	266.2	298	299	301	305.6	340	341	342	346.8	384	385	387	391.3	432	433	435	439.2	483	484	486	490.3	
Lo PR		140	141	145	150.1	148	149	152	158.0	154	156	159	164.9	160	162	165	170.7	166	168	171	176.4	173	175	178	183.6	

EXPANDED HEATING DATA

APHM52431

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	29.56	27.61	25.69	23.81	22.60	21.70	19.42	17.33	15.62	14.35	13.41	12.90	12.25	10.64	9.02	7.40	5.79
T/R	32.90	31.02	29.15	27.28	26.16	25.11	22.48	20.06	18.08	16.61	15.52	14.93	14.18	12.31	10.44	8.57	6.70
KW	1.87	1.86	1.84	1.83	1.82	1.81	1.80	1.79	1.77	1.76	1.74	1.73	1.73	1.71	1.70	1.69	1.67
AMPS	6.9	6.8	6.7	6.7	6.6	6.6	6.6	6.5	6.4	6.4	6.3	6.3	6.2	6.2	6.1	6.1	6.0
COP	4.63	4.36	4.09	3.82	3.64	3.51	3.16	2.84	2.58	2.39	2.25	2.18	2.08	1.82	1.55	1.29	1.01
Hi PR	373	361	348	336	329	324	312	300	288	276	264	256	252	239	227	215	203
LO PR	138	130	121	112	107	104	95	87	78	69	61	56	52	44	35	26	18

APHM53031

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	37.04	34.68	32.35	30.07	28.60	27.53	24.78	22.25	20.17	18.64	17.51	16.90	16.12	14.17	12.22	10.27	8.32
T/R	33.66	31.81	29.97	28.13	27.02	26.01	23.42	21.02	19.06	17.61	16.54	15.97	15.23	13.39	11.55	9.70	7.86
KW	2.48	2.44	2.40	2.36	2.34	2.33	2.29	2.25	2.21	2.18	2.14	2.12	2.10	2.06	2.03	1.99	1.95
AMPS	9.2	9.0	8.9	8.7	8.6	8.6	8.4	8.2	8.1	7.9	7.7	7.6	7.6	7.4	7.3	7.1	6.9
COP	4.38	4.17	3.95	3.73	3.58	3.47	3.17	2.90	2.67	2.51	2.40	2.34	2.25	2.01	1.77	1.51	1.25
Hi PR	415	402	388	375	367	361	348	334	321	307	294	286	280	267	253	240	226
LO PR	137	129	120	112	107	103	95	86	78	69	61	55	52	43	35	26	18

APHM52431

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	27.40	25.53	23.72	21.83	20.63	19.69	17.37	15.27	13.57	12.29	11.31	10.79	10.13	8.49	6.85	5.21	3.57
T/R	36.14	33.90	31.67	29.44	28.10	26.82	23.65	20.80	18.48	16.73	15.40	14.69	13.80	11.56	9.33	7.10	4.86
KW	1.52	1.47	1.43	1.38	1.35	1.33	1.29	1.24	1.20	1.15	1.11	1.08	1.06	1.02	0.97	0.93	0.88
AMPS	5.5	5.3	5.1	4.9	4.8	4.7	4.5	4.3	4.1	3.9	3.7	3.6	3.5	3.3	3.1	3.0	2.8
COP	5.30	5.09	4.88	4.64	4.47	4.32	3.95	3.60	3.32	3.12	2.99	2.93	2.79	2.45	2.07	1.65	1.19
Hi PR	402	389	376	363	355	350	337	324	311	298	285	277	272	258	245	232	219
LO PR	135	127	118	110	105	101	93	85	76	68	59	54	51	43	34	26	17

APHM53031

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	44.84	42.23	39.66	37.14	35.50	34.31	31.43	28.59	26.32	24.64	23.44	22.80	21.95	19.84	17.72	15.60	13.49
T/R	33.27	31.64	30.01	28.37	27.39	26.53	24.25	22.08	20.30	19.01	18.09	17.59	16.94	15.31	13.67	12.04	10.41
KW	2.83	2.84	2.84	2.84	2.84	2.84	2.85	2.85	2.85	2.85	2.85	2.86	2.86	2.86	2.86	2.86	2.87
AMPS	10.4	10.4	10.4	10.4	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.6
COP	4.64	4.36	4.09	3.83	3.66	3.54	3.24	2.94	2.71	2.53	2.41	2.34	2.25	2.03	1.82	1.60	1.38
Hi PR	406	393	380	367	359	354	340	327	314	301	288	280	274	261	248	235	221
LO PR	136	128	119	111	106	102	94	85	77	68	60	55	51	43	34	26	18

APHM53631

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	33.53	31.31	29.13	26.98	25.61	24.58	21.98	19.60	17.66	16.21	15.14	14.56	13.82	11.98	10.14	8.29	6.45
T/R	36.19	34.12	32.05	29.99	28.74	27.59	24.67	22.00	19.82	18.20	16.99	16.34	15.51	13.44	11.37	9.31	7.24
KW	1.75	1.72	1.69	1.66	1.64	1.63	1.60	1.57	1.54	1.51	1.48	1.46	1.45	1.42	1.39	1.35	1.32
AMPS	6.3	6.2	6.0	5.9	5.8	5.8	5.6	5.5	5.4	5.2	5.1	5.0	5.0	4.8	4.7	4.6	4.4
COP	5.61	5.33	5.05	4.76	4.57	4.42	4.03	3.66	3.36	3.15	3.00	2.93	2.80	2.48	2.14	1.79	1.43
Hi PR	394	381	368	356	348	343	330	317	304	291	279	271	266	253	240	227	215
LO PR	134	125	117	109	104	100	92	84	75	67	59	54	51	42	34	26	17

APHM54231

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	53.62	50.09	46.61	43.19	41.00	39.36	35.23	31.43	28.34	26.04	24.32	23.40	22.23	19.29	16.36	13.43	10.49
T/R	37.45	35.32	33.19	31.05	29.78	28.59	25.58	22.83	20.58	18.91	17.66	16.99	16.14	14.01	11.88	9.75	7.62
KW	3.44	3.41	3.38	3.35	3.34	3.33	3.30	3.27	3.25	3.22	3.19	3.18	3.16	3.14	3.11	3.08	3.06
AMPS	12.9	12.8	12.7	12.6	12.5	12.4	12.3	12.2	12.1	12.0	11.9	11.8	11.7	11.6	11.5	11.4	11.3
COP	4.57	4.31	4.04	3.77	3.60	3.47	3.13	2.82	2.56	2.37	2.23	2.16	2.06	1.80	1.54	1.28	1.01
Hi PR	414	400	387	373	365	360	346	333	319	306	292	284	279	266	252	239	225
LO PR	130	122	114	106	101	98	90	82	73	65	57	52	49	41	33	25	17

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

APHM54231

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	39.29	36.60	34.15	31.35	29.58	28.17	24.71	21.61	19.09	17.18	15.72	14.94	13.96	11.52	9.08	6.64	4.20
T/R	35.52	33.26	31.00	28.74	27.39	26.08	22.88	20.00	17.67	15.91	14.56	13.83	12.93	10.67	8.41	6.15	3.89
KW	2.11	2.06	2.01	1.96	1.93	1.91	1.86	1.81	1.75	1.70	1.65	1.62	1.60	1.55	1.50	1.45	1.40
AMPS	7.6	7.4	7.2	6.9	6.8	6.7	6.5	6.3	6.0	5.8	5.6	5.5	5.4	5.2	4.9	4.7	4.5
COP	5.45	5.20	4.98	4.69	4.50	4.33	3.90	3.51	3.19	2.96	2.79	2.70	2.56	2.18	1.78	1.35	0.88
Hi PR	401	388	375	362	354	349	336	323	310	296	283	276	270	257	244	231	218
LO PR	128	120	112	104	99	96	88	80	72	64	56	51	48	40	32	24	16

APHM54831

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	54.12	50.44	46.82	43.27	41.00	39.27	34.94	30.99	27.78	25.38	23.57	22.60	21.37	18.31	15.24	12.17	9.11
T/R	30.60	28.79	26.99	25.19	24.10	23.09	20.54	18.22	16.33	14.92	13.86	13.29	12.57	10.76	8.96	7.16	5.35
KW	3.31	3.29	3.27	3.24	3.23	3.22	3.20	3.18	3.15	3.13	3.11	3.10	3.09	3.06	3.04	3.02	3.00
AMPS	11.9	11.8	11.7	11.6	11.5	11.5	11.4	11.3	11.2	11.1	11.0	11.0	10.9	10.8	10.7	10.6	10.5
COP	4.79	4.50	4.20	3.91	3.72	3.57	3.20	2.86	2.58	2.38	2.22	2.14	2.03	1.75	1.47	1.18	0.89
Hi PR	384	372	359	347	339	334	322	309	297	284	272	264	259	247	234	222	209
LO PR	131	122	114	106	101	98	90	82	74	66	57	53	49	41	33	25	17

APHM54831

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	39.29	36.60	34.18	31.40	29.58	28.11	24.52	21.32	18.73	16.76	15.24	14.43	13.42	10.89	8.37	5.84	3.32
T/R	31.83	29.75	27.67	25.59	24.35	23.14	20.18	17.55	15.41	13.79	12.54	11.88	11.04	8.97	6.89	4.81	2.73
KW	2.04	1.99	1.94	1.89	1.87	1.85	1.80	1.75	1.70	1.66	1.61	1.58	1.56	1.51	1.47	1.42	1.37
AMPS	7.1	6.9	6.7	6.5	6.3	6.2	6.0	5.8	5.6	5.4	5.2	5.1	5.0	4.8	4.6	4.4	4.2
COP	5.65	5.39	5.16	4.86	4.65	4.46	3.99	3.57	3.22	2.96	2.78	2.68	2.52	2.11	1.67	1.21	0.71
Hi PR	372	360	348	336	329	324	312	300	287	275	263	256	251	239	227	215	203
LO PR	128	120	112	104	100	96	88	80	72	64	56	52	48	40	32	25	17

APHM56031

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	76.34	71.48	66.71	62.01	59.00	56.80	51.18	45.97	41.71	38.56	36.24	35.00	33.40	29.40	24.00	20.33	16.53
T/R	34.86	32.96	31.06	29.16	28.02	26.97	24.30	21.83	19.81	18.31	17.21	16.62	15.86	13.96	12.06	10.16	8.26
KW	4.82	4.74	4.67	4.60	4.55	4.52	4.45	4.37	4.30	4.22	4.15	4.10	4.07	4.00	3.52	3.48	3.42
AMPS	17.9	17.5	17.2	16.9	16.7	16.6	16.2	15.9	15.6	15.3	14.9	14.7	14.6	14.3	12.5	12.0	11.7
COP	4.64	4.42	4.19	3.96	3.80	3.68	3.37	3.08	2.84	2.68	2.56	2.50	2.40	2.15	2.00	1.71	1.42
Hi PR	383	370	358	345	338	333	321	308	296	283	271	263	258	246	233	221	208
LO PR	137	128	120	111	106	103	94	86	77	69	60	55	52	43	35	26	18

APHM56031

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	56.53	52.67	48.91	45.03	42.56	40.64	35.86	-	-	-	-	-	-	-	-	-	-
T/R	38.08	35.73	33.39	31.04	29.63	28.29	24.97	-	-	-	-	-	-	-	-	-	-
KW	2.95	2.86	2.77	2.68	2.63	2.59	2.50	-	-	-	-	-	-	-	-	-	-
AMPS	10.7	10.3	9.9	9.6	9.3	9.2	8.8	-	-	-	-	-	-	-	-	-	-
COP	5.62	5.40	5.17	4.92	4.75	4.59	4.20	-	-	-	-	-	-	-	-	-	-
Hi PR	371	359	347	335	328	323	311	-	-	-	-	-	-	-	-	-	-
LO PR	134	126	117	109	104	101	92	-	-	-	-	-	-	-	-	-	-

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature.

kW = Total system power

APHM52431					
COOLING/ HP SPEED	ADJUST TAP	CFM*	ELECTRIC HEAT	ADJUST TAP	CFM*
A	Minus	698	A	Minus	698
	Normal	775		Normal	775
	Plus	853		Plus	853
B	Minus	788	B	Minus	788
	Normal**	875		Normal	875
	Plus	963		Plus	963
C	Minus	878	C	Minus	878
	Normal	975		Normal	975
	Plus	1073		Plus	1073
D	Minus	968	D	Minus	968
	Normal	1075		Normal	1075
	Plus	1183		Plus	1183

* - @ 0.1 - 0.8 ESP

** - Rated Cooling Speed

The Electric Heat airflow should not be less than the Cooling airflow selected during install.

APHM53631					
COOLING/ HP SPEED	ADJUST TAP	CFM*	ELECTRIC HEAT	ADJUST TAP	CFM*
A	Minus	990	A	Minus	990
	Normal	1100		Normal	1100
	Plus	1210		Plus	1210
B	Minus	1080	B	Minus	1080
	Normal**	1200		Normal	1200
	Plus	1320		Plus	1320
C	Minus	1170	C	Minus	1170
	Normal	1300		Normal	1300
	Plus	1430		Plus	1430
D	Minus	1260	D	Minus	1260
	Normal	1400		Normal	1400
	Plus	1540		Plus	1540

* - @ 0.1 - 0.8 ESP

** - Rated Cooling Speed

The Electric Heat airflow should not be less than the Cooling airflow selected during install.

APHM52431					
COOLING/ HP SPEED	ADJUST TAP	CFM*	ELECTRIC HEAT	ADJUST TAP	CFM*
A	Minus	990	A	Minus	990
	Normal	1100		Normal	1100
	Plus	1210		Plus	1210
B	Minus	1080	B	Minus	1080
	Normal**	1200		Normal	1200
	Plus	1320		Plus	1320
C	Minus	1170	C	Minus	1170
	Normal	1300		Normal	1300
	Plus	1430		Plus	1430
D	Minus	1260	D	Minus	1260
	Normal	1400		Normal	1400
	Plus	1540		Plus	1540

* - @ 0.1 - 0.8 ESP

** - Rated Cooling Speed

The Electric Heat airflow should not be less than the Cooling airflow selected during install.

APHM53031					
COOLING/ HP SPEED	ADJUST TAP	CFM*	ELECTRIC HEAT	ADJUST TAP	CFM*
A	Minus	855	A	Minus	855
	Normal	950		Normal	950
	Plus	1045		Plus	1045
B	Minus	945	B	Minus	945
	Normal**	1050		Normal	1050
	Plus	1155		Plus	1155
C	Minus	1035	C	Minus	1035
	Normal	1150		Normal	1150
	Plus	1265		Plus	1265
D	Minus	1125	D	Minus	1125
	Normal	1250		Normal	1250
	Plus	1375		Plus	1375

* - @ 0.1 - 0.8 ESP

** - Rated Cooling Speed

The Electric Heat airflow should not be less than the Cooling airflow selected during install.

APHM54231					
COOLING/ HP SPEED	ADJUST TAP	CFM*	ELECTRIC HEAT	ADJUST TAP	CFM*
A	Minus	1080	A	Minus	1080
	Normal	1200		Normal	1200
	Plus	1320		Plus	1320
B	Minus	1170	B	Minus	1170
	Normal**	1300		Normal	1300
	Plus	1430		Plus	1430
C	Minus	1260	C	Minus	1260
	Normal	1400		Normal	1400
	Plus	1540		Plus	1540
D	Minus	1350	D	Minus	1350
	Normal	1500		Normal	1500
	Plus	1650		Plus	1650

* - @ 0.1 - 0.8 ESP

** - Rated Cooling Speed

The Electric Heat airflow should not be less than the Cooling airflow selected during install.

APHM56031

HORIZONTAL FLOW

MOTOR TAP	EXTERNAL STATIC PRESSURE IN W.C.	SCFM	RPM	BHP
T1	0.2	1372	665	0.20
	0.4	1259	734	0.23
	0.6	1133	813	0.25
	0.8	1016	888	0.27
T2	0.2	2176	878	0.69
	0.4	2080	939	0.74
	0.6	1973	1000	0.79
	0.8	1887	1048	0.83
T3	0.2	2176	878	0.69
	0.4	2080	939	0.74
	0.6	1973	1000	0.79
	0.8	1887	1048	0.83
T4	0.2	2234	960	0.86
	0.4	2162	1003	0.9
	0.6	2101	1042	0.83
	0.8	2053	1073	0.96
T5	0.2	2300	982	0.93
	0.4	2222	1025	0.98
	0.6	2170	1061	1.01
	0.8	2120	1095	1.04

DOWNFLOW

MOTOR TAP	EXTERNAL STATIC PRESSURE IN W.C.	SCFM	RPM	BHP
T1	0.2	1380	664	0.20
	0.4	1262	735	0.23
	0.6	1132	811	0.25
	0.8	1006	884	0.27
T2	0.2	2145	902	0.71
	0.4	2056	952	0.75
	0.6	1967	1003	0.79
	0.8	1890	1051	0.83
T3	0.2	2145	902	0.71
	0.4	2056	952	0.75
	0.6	1976	1003	0.79
	0.8	1890	1051	0.83
T4	0.2	2293	950	0.85
	0.4	2195	995	0.89
	0.6	2112	1042	0.93
	0.8	2034	1088	0.97
T5	0.2	2364	971	0.92
	0.4	2274	1019	0.97
	0.6	2190	1063	1.01
	0.8	2113	1110	1.06

NOTES

- Airflow below 1500 SCFM (300 SCFM/ton) is not recommended for High Stage cooling or heating

HEAT KIT ELECTRICAL DATA (BLOWER ONLY, HEAT MODE)


MODEL AND HEAT KIT USAGE	CIRCUIT #1		CIRCUIT #2		SINGLE-POINT KIT		ACTUAL kW
	MCA ¹	MOP ²	MCA ¹	MOP ²	MCA ¹	MOP ²	
APHM52431							
HKTPD051	24.7	25	-	-	43.18	45	4.75
HKTPD081	36.5	40	-	-	54.98	60	7
HKTPD101	49.5	50	-	-	67.98	70	9.5
APHM53031							
HKTPD051	24.7	25	-	-	46.22	50	4.75
HKTPD081	36.5	40	-	-	58.02	60	7
HKTPD101	49.5	50	-	-	71.02	80	9.5
HKTPD151	49.5	50	24.7	25	95.72	100	14.25
APHM53631							
HKTPD051	24.7	25	-	-	54.46	60	4.75
HKTPD081	36.5	40	-	-	66.26	70	7
HKTPD101	49.5	50	-	-	79.26	80	9.5
HKTPD151	49.5	50	24.7	25	103.96	110	14.25
APHM54231							
HKTPD051	24.7	25	-	-	60.54	70	4.75
HKTPD081	36.5	40	-	-	72.34	80	7
HKTPD101	49.5	50	-	-	85.34	90	9.5
HKTPD151	49.5	50	24.7	25	110.04	125	14.25
APHM54831							
HKTPD051	24.7	25	-	-	61.14	70	4.75
HKTPD081	36.5	40	-	-	72.94	80	7
HKTPD101	49.5	50	-	-	85.94	90	9.5
HKTPD151	49.5	50	24.7	25	110.64	125	14.25
HKTPD191	49.5	50	49.5	50	135.44	150	19
APHM56031							
EHXD-1S05A	-	-	-	-	70.3	90	5
EHXD-1S10A	-	-	-	-	96.3	110	10
EHXD-1S15A	-	-	-	-	122	125	15
EHXD-1S20A	-	-	-	-	148	150	20

¹ Minimum Circuit Ampacity


² Maximum Overcurrent Protection Device

Heating kW Correction Factor					
Supply Voltage	240	230	220	210	208
Correction Factor	1.0	0.93	0.85	0.78	0.76


Multiply rated kW by correction factor to get actual kW

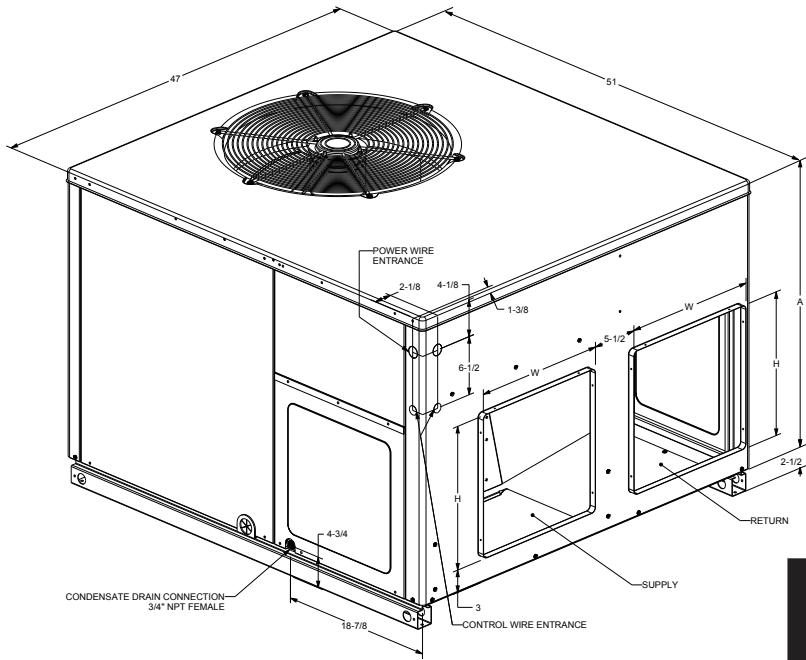



MODEL	UNIT DIMENSIONS (INCHES)				CHASSIS SIZE
			HEIGHT		
	W	D	A	B	
APHM52431	47	51	32	34¾	Medium
APHM53031	47	51	32	34¾	Medium
APHM53631	47	51	40	42¾	Large
APHM54231	47	51	40	42¾	Large
APHM54831	47	51	40	42¾	Large
APHM56031	73¾	47¾	39	43½	X-Large

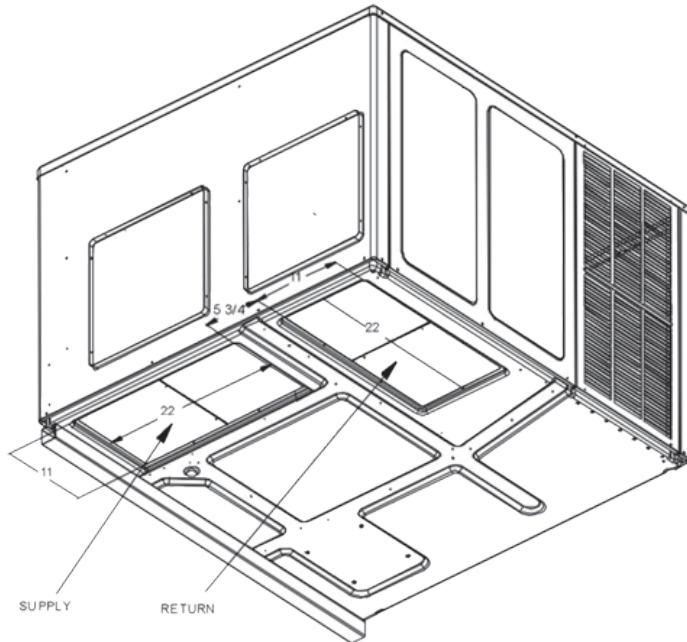

MODEL	DUCT OPENINGS			
	SUPPLY		RETURN	
	W	H	W	H
APHM52431	16	16	16	16
APHM53031	16	16	16	16
APHM53631	16	18	16	18
APHM54231	16	18	16	18
APHM54831	16	18	16	18
APHM56031	17	12	11	25

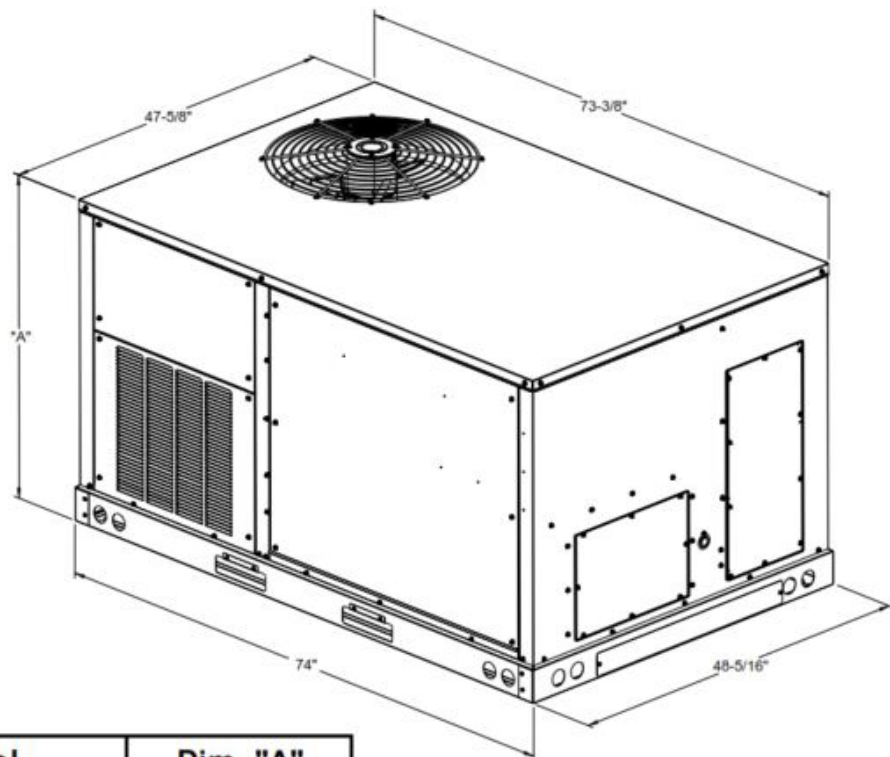

Model	Dim. "A"
5 Ton Heat Pump	43-1/2"

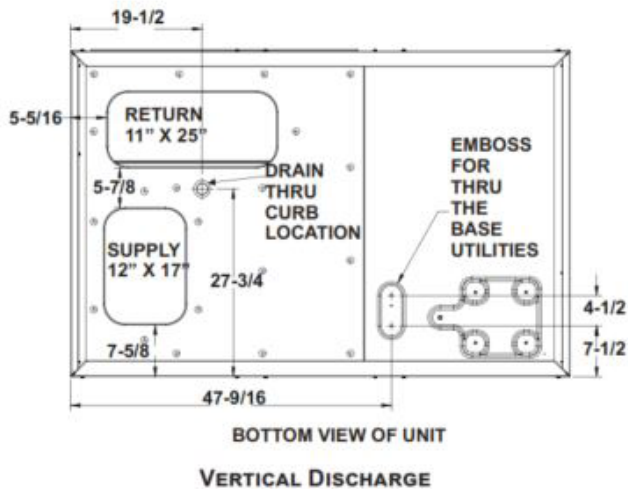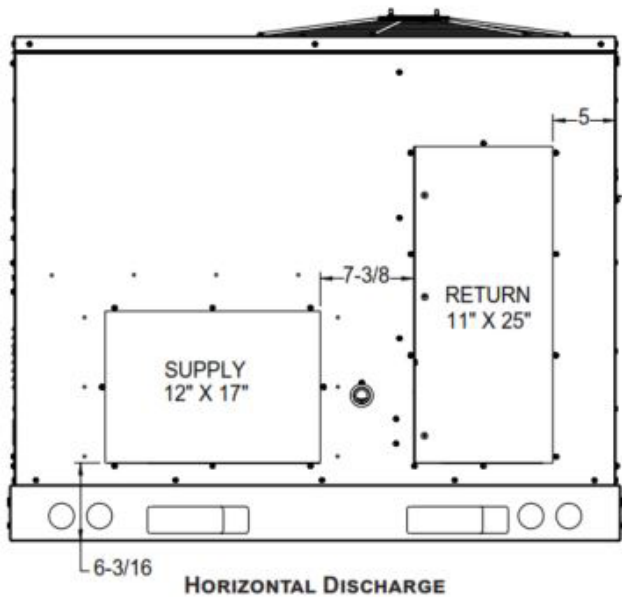

NOTE: REFER TO IOD-7082 INCLUDED IN THE LITERATURE PACK FOR INSTALLING HORIZONTAL DUCT COVERS.

Provisions for forks have been included in the unit base frame. No other fork locations are approved.

- Unit must be lifted by the four lifting holes located at the base frame corners.
- Lifting cables should be attached to the unit with shackles.
- The distance between the crane hook and the top of the unit must not be less than 60".
- Two spreader bars must span over the unit to prevent damage to the cabinet by the lift cables. Spreader bars must be of sufficient length so that cables do not come in contact with the unit during transport. Remove wood struts mounted beneath unit base frame before setting unit on roof curb. These struts are intended to protect unit base frame from fork lift damage. To remove the struts, extract the sheet metal retainers and pull the struts through the base of the unit. Refer to rigging label on the unit.

Important: If using bottom discharge with roof curb, duct-work should be attached to the curb prior to installing the unit. Duct-work dimensions are shown in Roof Curb Installation Instructions Manual.

Refer to the Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual.

Lower unit carefully onto roof mounting curb. While rigging the unit, the center of gravity will cause the condenser end to be lower than the supply air end.

Bring condenser end of unit into alignment with the curb. With condenser end of the unit resting on curb member and using curb as a fulcrum, lower opposite end of the unit until entire unit is seated on the curb. When a rectangular cantilever curb is used, take care to center the unit. Check for proper alignment and orientation of supply and return openings with duct.

To assist in determining rigging requirements, unit weights are shown on the following page.

Curb installations must comply with local codes and should follow the established guidelines of the National Roofing Contractors Association.


Proper unit installation requires that the roof curb be firmly and permanently attached to the roof structure. Check for adequate fastening method prior to setting the unit on the curb.

Full perimeter roof curbs are available from the factory and are shipped unassembled. The installing contractor is responsible for field assembly, squaring, leveling, and mounting on the roof structure. All required hardware necessary for the assembly of the sheet metal curb is included in the curb accessory package.


- Determine sufficient structural support before locating and mounting the curb and package unit.
- Duct-work must be constructed using industry guidelines. The duct-work must be placed into the roof curb before mounting the package unit. Our full perimeter curbs include duct connection frames to be assembled with the curb. Cantilevered-type curbs are not available from the factory.
- Contractor furnishes curb insulation, cant strips, flashing, and general roofing material.
- Support curbs on parallel sides with roof members. To prevent damage to the unit, the roof members cannot penetrate supply and return duct openings.

Note: The unit and curb accessories are designed to allow vertical duct installation before unit placement. Duct installation after unit placement is not recommended.


See the manual shipped with the roof curb for assembly and installation instructions.

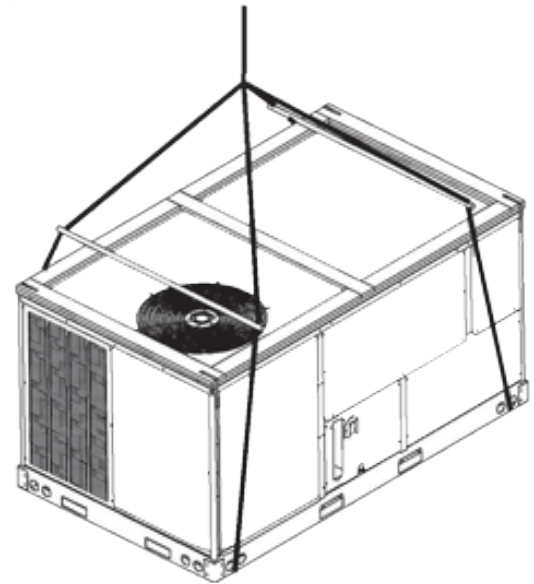


3-D VIEW

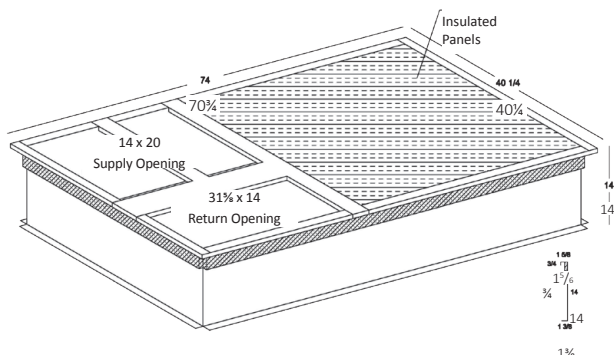

TOP VIEW

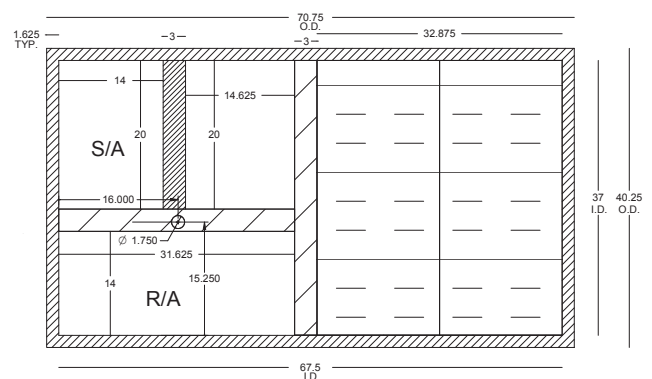


CORNER & CENTER-OF-GRAVITY LOCATIONS

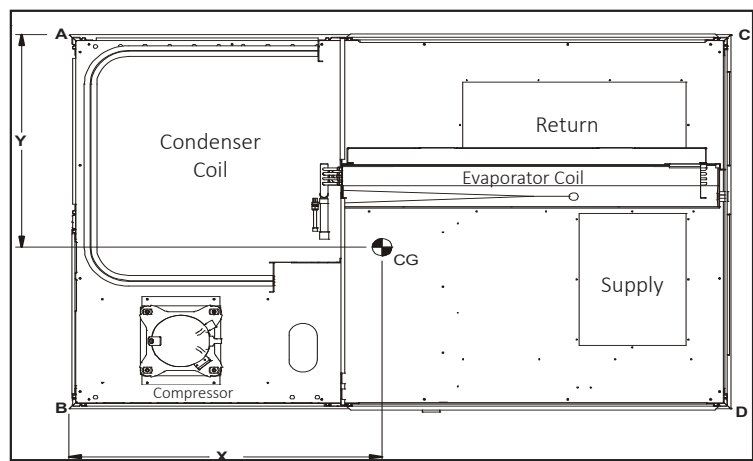


MODEL	X (IN)	Y (IN)	SHIPPING WEIGHT (LBS)	OPERATING WEIGHT (LBS)	CORNER WEIGHTS (LBS.)			
					A	B	C	D
APHM56031	33.5	27.6	688	630	150	194	165	121

UNIT CLEARANCES

Maintain an adequate clearance around the unit for safety, service, maintenance, and proper unit operation. Leave a total clearance of 75" on the main control panel side of the unit for possible removal of fan shaft, coil, electric heat, and gas furnace. Leave a clearance of 48" on all other sides of the unit for possible compressor removal or service access, and to ensure proper ventilation and condenser airflow. Do not install the unit beneath any obstruction. Install the unit away from all building exhausts to inhibit ingestion of exhaust air into the unit's fresh-air intake.

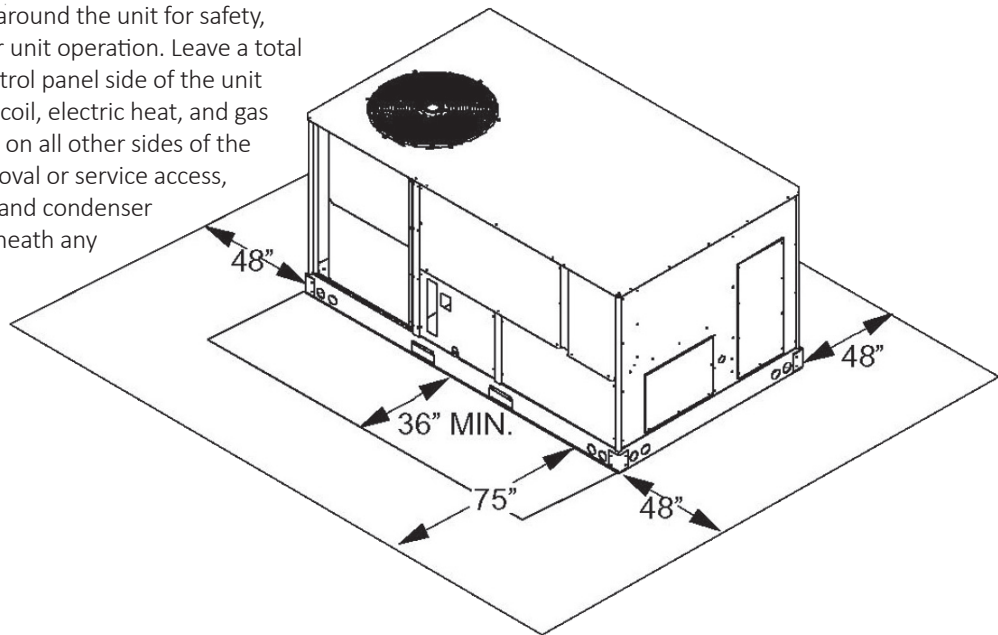

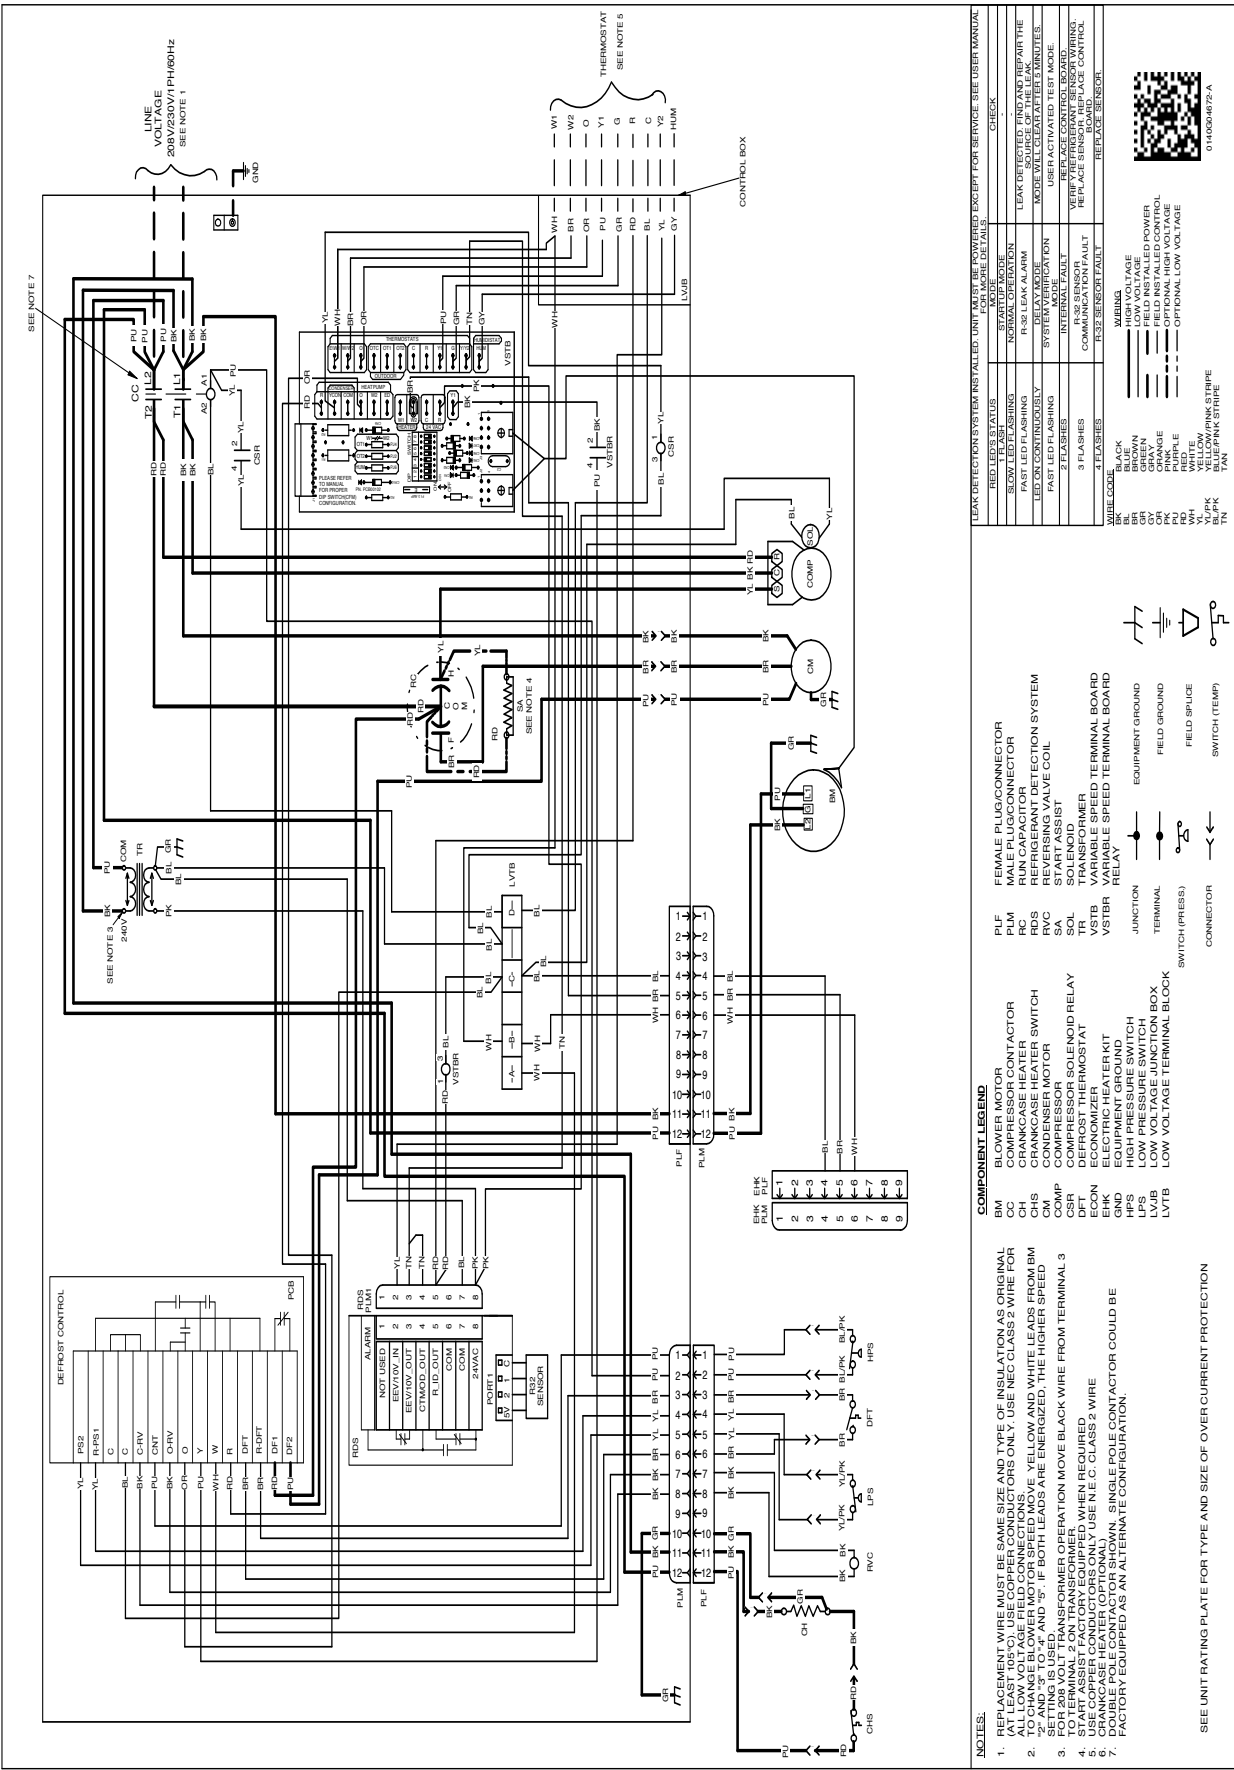

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

FOR APHM5(24-48)31

ACCESSORY DESCRIPTION	ITEM NUMBER	
	MEDIUM CHASSIS	LARGE CHASSIS
Concentric Kit	CDK36	CDK4872
Downflow Economizer**	GPJMED102	GPJMED103
Downflow Internal Filter Rack	DDNIFRPCHMM	DDNIFRPCHML
Downflow Manual Damper	PGMDD101/102	PGMDD103
Downflow Motorized Damper	PGMDMD101/102	PGMDMD103
Downflow Square to Round	SQRPG101/102	SQRPG103
Horizontal Duct Cover*	20464501PDGK	20464502PDGK
Downflow Conversion Kit**	DWNFLWCONV	DWNFLWCONV
Economizer Wiring Harness***	0259L00411	0259L00411
External Horizontal Filter Rack	DPHFRA	DPHFRA
Horizontal Duct Cover	20464501PDGK	20464502PDGK
Horizontal Economizer	DHZECNJPGCHM	DHZECNJPGCHL
Horizontal Manual Damper	PGMDH102	PGMDH103
Horizontal Motorized Damper	PGMDMH102	PGMDMH103
Horizontal Square to Round	SQRPGH102	SQRPGH103
Outdoor Thermostat Kit w/ Lockout Stat	OT18-60A	OT18-60A
Outdoor Thermostat Kit (Only for GPHM5(24,30)31	OTHPKG-01	-
Roof Curb	D14CRBPGCHMA	D14CRBPGCHMA

*Required for all downflow installations.

**Either a "Downflow Economizer" or a "Downflow Conversion Kit" is mandatory for all downflow installations.

***Required for installation of Economizers.

FOR APHM56031 UNIT

ITEM #	DESCRIPTION
0221L00014	14" Roof Curb
0270L01166	25% Manual Fresh Air Damper
0270L01165	25% Motorized Fresh Air Damper
0270L01338	Concentric Duct Adapter Kit 18"
0270L01753	Downflow Low-Leak Economizer Enthalpy
0270L01755	Downflow Ultra Low-Leak Economizer Enthalpy
0270L01757	Horizontal Ultra Low-Leak Economizer Enthalpy
EHXD-1S**	Electric Heat Kits
0270L01250	Hurricane Restraint Clips (for 0221L00014 Roof Curb)
0270L01261	Hurricane Restraint Clips

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

[illegible]

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.