innovair®

INNOVATIVE IDEAS IN AIR CONDITIONING




HYPER

Main Features

- R454B environmentally friendly refrigerant
- A2L sensor factory installed
- EnergyStar for all models
- Low ambient operation to -22°F (-30°C)
- Qualifies for multiple rebate programs
- WIFI app included
- Up to 6 zones (select models)
- Mix and match with 8 indoor options
- Auto defrosting
- 24V capable (conversion kit sold separately)

UP TO 21 SEER2 EFFICIENCY

M4+

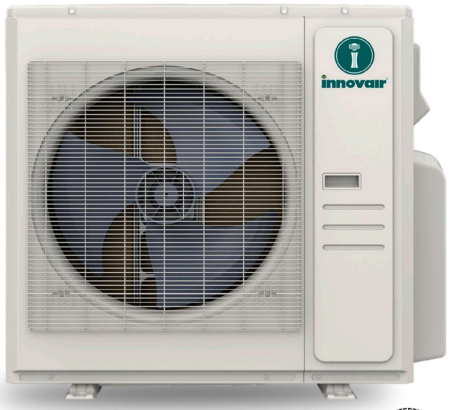

ENERGY STAR

INVERTER

R454B

AHRI CERTIFIED

ETL US

innovair®

M4+ OUTDOOR HYPER

UP TO 6 ZONES - *MIX AND MATCH*

Type (Multi Zone)				Up to 3 indoor units	Up to 4 indoor units	Up to 5 indoor units	Up to 6 indoor units	Up to 6 indoor units
Model #				MOM18H2BH3A	MOM27H2BH4A	MOM36H2BH5A	MOM48H2BH6A	MOM60H2BH6A
AHRI# (Non-Ducted)				215725516	215725519	215725522	215725525	215835702
AHRI# (Ducted)				215725517	215725520	215725523	215725526	215835703
AHRI# (Mixed Ducted and Non-Ducted)				215725518	215725521	215725524	215725527	215835704
E-STAR__V6.1				No	No	No	No	No
Refrigerant				R454B	R454B	R454B	R454B	R454B
Voltage, Frequency, Phase			V-Hz-Ph	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1
Voltage Range			V	187~253	187~253	187~253	187~253	187~253
Cooling	Rated Capacity at 95°F (35°C)		Btu/h	19000	28000	36000	47000	53000
	Cooling Capacity Range(MIN-MAX)		Btu/h	5400~27600	7200~38000	9000~42000	12000~57000	19000~60000
	Capacity at 109°F (43°C)		Btu/h	24000	30400	33000	45000	44000
	Power Input		W	1460	2333	3000	4020	4530
	Current Range		A	3.5 ~11.0	4.0 ~20.0	5.2 ~19.0	7.0 ~25.0	10.0 ~27.0
	EER2 at 95°F (35°C)		Btu/h/W	13.00	12.00	12	11.7	11.7
	SEER2		Btu/h/W	20.00	19.00	19.4	20.4	20
	Working Temperature Range		°F (°C)	-22~122 (-30~50)				
Heating	Rated Capacity at 47°F (8°C)		Btu/h	20000	28000	36000	48000	55000
	Heating Capacity Range(MIN-MAX)		Btu/h	5700~25400	8400~38500	10000~45000	13000~60000	20000~61000
	Power Input		W	1465	2279	2776	4000	4356
	Current Range		A	3.0 ~10.5	4.0 ~18.0	5.2 ~16.0	7.0 ~22.0	10 ~23
	COP2 at 47°F (8°C)		W/W	4.00	3.60	3.8	3.52	3.7
	COP @ 5°F (-15°C)		W/W	2.00	2	2	2	2.1
	HSPF2(IV)		Btu/h/W	10	9.50	10.4	11	10.7
	HSPF2(V)		Btu/h/W	8	7.7	8.8	9	8.8
	Rated Capacity Heating at 17°F (-8°C)		Btu/h	22000	27000	34000	46000	52000
	Maximum Heating Capacity @5°F (-15°C)		Btu/h	18000	27000	38000	48000	48000
	Maximum Heating Capacity @-13°F (-25°C)		Btu/h	13600	16000	21000	34000	26000
	Maximum Heating Capacity @-22°F (-30°C)		Btu/h	11000	13000	17300	28000	16000
	Working Temperature Range		°F (°C)	-22~75 (-30~24)				
MOP (Maximum Overcurrent Protection)			A	20	35	40	40	40
MCA (Minimum Current Ampacity)			No.× AWG	3×14AWG	3×12AWG	3×10AWG	3×10AWG	3×10AWG
Communication Cable Size			No.× AWG	4×14AWG	4×14AWG	4×14AWG	4×14AWG	4×14AWG
Airflow Outdoor Unit			CFM	2131	2148	3037	4503	4503
Noise Level			dB(A) (Max)	61.5	61	65	65	65
Compressor	Model			KTM240D46UKT2	KTF310D43UMT	EKPQ420D1UMUA	EKPQ440D1UMUB	EKPQ440D1UMUB
	Type			ROTARY	ROTARY	TWIN-ROTARY	TWIN-ROTARY	TWIN-ROTARY
Net Dimension (WxDxH)			inch	37.24 x 16.14 x 31.89	37.24 x 16.14 x 31.89	38.58 x 16.34 x 38.39	37.48 x 16.34 x 52.48	37.48 x 16.34 x 52.48
Net Weight			lbs	137.4	168.5	212	246.5	246.5
Piping	Diameter(Liquid)		inch	(3x1/4)	(4x1/4)	(5x1/4)	(6x1/4)	(6x1/4)
	Diameter(Gas)		inch	(3x3/8)	(3x3/8) + (1x1/2)	(3x3/8) + (2x1/2)	(4x3/8) + (2x1/2)	(4x3/8) + (2x1/2)
	Piping	Diameter(Liquid)	inch	(3x1/4)	(4x1/4)	(5x1/4)	(6x1/4)	(6x1/4)
		Diameter(Gas)	inch	(3x3/8)	(3x3/8) + (1x1/2)	(3x3/8) + (2x1/2)	(4x3/8) + (2x1/2)	(4x3/8) + (2x1/2)
		Max Length(Each Indoor)	ft	98.4	114.8	114.8	114.8	114.8
		Max Length(Total)	ft	196.8	262.4	262.4	262.4	262.4
	Max Length(Each)		ft	98.4	114.8	114.8	114.8	114.8
	Max Length(Total)		ft	196.8	262.4	262.4	262.4	262.4
	Max Height		ft	49.2	49.2	49.2	49.2	49.2
Pre-Charged refrigerant			oz	78.31	120.63	134.04	151.68	151.68
			Ft	24.6	24.6	24.6	24.6	24.6
Additional refrigerant			oz/ft	0.16	0.16	0.16	0.16	0.16

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.



EZ-Highwall

- The E-Box and PCB are positioned at the front of the unit, for effortless access.
- The blower wheel can be easily removed, allowing for straightforward disassembly and maintenance.
- A larger air inlet and outlet enhance airflow efficiency.
- Vertical and horizontal louvers feature an Auto-Swing function for optimal air distribution.
- The magnetic filter on top is designed for quick and easy removal.
- Required installation distance from cieling 2”
- Compatible with both Regular outdoor units (-13°F) and Hyper outdoor units (-22°F).
- Includes a Self-Cleaning feature (available on Single-Zone systems only).
- Equipped with Follow Me mode for personalized comfort.
- Eco Mode functionality (specific to Single-Zone systems).
- 46°F Freeze Protection ensures reliable performance in cold conditions.

Model #		MHW09H1BMRB	MHW12H1BMRB	MHW09H2BHRB	MHW12H2BHRB	MHW18H2BHRB	MHW24H2BHRB	MHW33H2BHRA
Cooling/Heating capacity	Btu/h	9000 / 10000	12000 / 12000	9000 / 10000	12000 / 12000	18000 / 18000	24000 / 25000	33000 / 36000
Power	V/Hz/f	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P
Air flow (H/M/L)	CFM	325 / 285 / 235	325 / 285 / 235	325 / 230 / 180	325 / 230 / 180	500 / 360 / 295	625 / 415 / 320	736 / 600 / 424
Noise Level (Sound Pressure)	dB(A)	36 / 32 / 21	36 / 32 / 21	43 / 31 / 18	43 / 31 / 18	38 / 33 / 28	43 / 39 / 21	54 / 47 / 36
Net Dimension (WxHxD)	inch	33 ½ x 9 ¼ x 11 ¾	33 ½ x 9 ¼ x 11 ¾	33 ½ x 9 ¼ x 11 ¾	33 ½ x 9 ¼ x 11 ¾	40 x 9 ¾ x 12 ½	47 x 11 ¼ x 14 ¾	47 x 11 ¼ x 14 ¾
Net Weight	lbs	23	23	23	23	27	44	44

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.

- Activated Carbon Filter for enhanced air purification
- Anti-Corrosive GoldFin Coating for durability
- Omni-Directional Airflow for comprehensive circulation
- Sleep Mode for nighttime comfort
- Turbo Mode for rapid cooling or heating
- Adjustable Fan Speeds for customized airflow
- Detection of Refrigerant Leaks for system protection
- Self-Diagnosis feature for quick troubleshooting
- Fresh Air Intake to improve indoor air quality

360° CASSETTE





Body Model #		MCS09H2BHRA	MCS12H2BHRA	MCS18H2BHRA	MCS24H2BHRA
Cooling/Heating capacity	Btu/h	9000 / 10000	12000 / 12000	18000 / 18000	24000 / 25000
Power	V/Hz/f	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P
Air flow (TurboH/M/L)	CFM	353/312/265/183	418/365/306/194	447/389/318/194	765/706/636/547
Noise Level (Sound Pressure)	dB(A)	43/40/37/26	46/42/39/27	48/44/41/29	46/43/34
Net Dimension (WxDxH)	inch	22 ½ x 22 ½ x 9 ¾	22 ½ x 22 ½ x 9 ¾	22 ½ x 22 ½ x 9 ¾	32 ¾ x 32 ¾ x 8
Net Weight	lbs	35	35	35	47

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.

INNOVATIVE IDEAS IN AIR CONDITIONING

innovair®

- Intelligent airflow: Three-speed fan motor allows static air pressure to be adjusted automatically or manually for optimal performance.
- Anti-cold air feature: Prevents cold air from blowing into the room during startup by delaying fan operation until the coil is warm.
- Quick cooling/heating function: Runs at full capacity to quickly achieve the desired temperature when there's a difference of over 10 degrees from the room temperature.
- Aluminum coil: Offers improved corrosion resistance compared to copper coils.
- Optional auxiliary heater: Backup heating available in 5kW, 10kW, 15kW, and 20kW models, sold separately.
- Auto-restart feature: Automatically resumes operation after a power outage.
- Refrigerant leak alert: Displays error code "EC" to protect the compressor from potential damage caused by refrigerant leaks.
- Wired controller: Compatible with most 24V wired thermostats for seamless integration.
- True multi-position air handler: Designed for flexible installation in horizontal or vertical (upward or downward) orientations to maximize space efficiency.



MULTI POSITION AHU

Model #		MAH18H2MHWA	MAH24H2MHWA	MAH30H2MHWA	MAH36H2MHWA
Cooling/Heating capacity	Btu/h	18000 / 18000	24000 / 25000	30000 / 30000	36000 / 37000
Power	V/Hz/f	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P
Air flow (H/M/L)	CFM	618/530/489	824/695/630	989/806/712	1189/971/865
Noise Level (Sound Pressure)	dB(A)	42/40/33	44/42/29	44/41/26	48/45/31
Net Dimension (WxDxH)	inch	21.02 x 17.52 x 45.00	21.02 x 17.52 x 45.00	21.02 x 21.02 x 49.02	21.02 x 21.02 x 49.02
Net Weight	lbs	105	105	128	128

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.

Model #		MFC18H2PHRA	MFC24H2PHRA
Cooling/Heating capacity	Btu/h	18000 / 20000	24000 / 25000
Power	V/Hz/f	208-230V~,60Hz,1P	208-230V~,60Hz,1P
Air flow (TurboH/M/L)	CFM	577/547/486/421	736/706/606/453
Noise Level (Sound Pressure)	dB(A)	43/40/32	51/49/45/34
Net Dimension (WxDxH)	inch	42 x 26 ½ x 24 ¼	42 x 26 ½ x 24 ¼
Net Weight	lbs	58.4	61.3

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.



M4 MULTI

HIGH STATIC FAN COIL

Model Name		MDH09H2MHWA	MDH12H2MHWA	MDH18H2MHWA	MDH24H2MHWA
Cooling/Heating capacity	Btu/h	9000 / 10000	12000 / 12000	18000 / 18000	24000 / 25000
Power	V/Hz/f	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P
Indoor Static Pressure Range	in.w.g	0-0.8	0-0.8	0-0.8	0-0.8
Air flow (TurboH/M/L)	CFM	344/288/231/201	419/350/256/216	706/618/530/441	854/706/618/500
Noise Level (Sound Pressure)	dB(A)	31/30/29	34/33/31	40/37/35/33	43/40/38/36
Net Dimension (WxDxH)	inch	27 ½ x 29 ½ x 9 ¾	27 ½ x 29 ½ x 9 ¾	39 ½ x 29 ½ x 9 ¾	39 ½ x 29 ½ x 9 ¾
Net Weight	lbs	64	64	80	80

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.

- Wired Controller Included



Model Name		MDL09H2MHWA	MDL12H2MHWA	MDL18H2MHWA
Cooling/Heating capacity	Btu/h	9000 / 10000	11500 / 12000	17000 / 20000
Power	V/Hz/f	208-230V~,60Hz,1P	208-230V~,60Hz,1P	208-230V~,60Hz,1P
Indoor Static Pressure Range	in.w.g	0-0.4	0-0.4	0-0.4
Air flow (TurboH/M/L)	CFM	324/265/206/147	400/323/265/177	600/559/500/441
Noise Level (Sound Pressure)	dB(A)	34/33/29	34/33/29	41/39/38
Net Dimension (WxDxH)	inch	27 ½ x 20 x 8	27 ½ x 20 x 8	34 ¾ x 26 ½ x 8 ¼
Net Weight	lbs	40	40	55

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.

LOW PROFILE FAN COIL


ONE-WAY CASSETTE



Body Model #		MC009H2BHRA	MC018H2BHRA
Cooling/Heating capacity	Btu/h	9000 / 11000	18000 / 18000
Power	V/Hz/f	208-230V~,60Hz,1P	208-230V~,60Hz,1P
Air flow (Turbo/H/M/L)	CFM	341/294/259/235	400/352/300/207
Noise Level (Sound Pressure)	dB(A)	47/39/34/24	44/41/30
Net Dimension (WxDxH)	inch	50 ¼ x 13 ¼ x 9	50 ¼ x 13 ¼ x 9
Net Weight	lbs	45	45

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.

NOTE: MC009H2BHRB can be dip switched down to a 6K
MC018H2BHRB can be dip switched down to a 12K

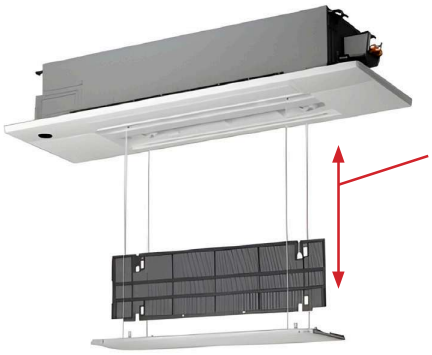

58-3/4in

MLFP (Motorized Lowering Filter Panel)

Eliminate the need for manual access with the Motorized Elevation Panel, which autonomously adjusts its position.

By activating the Elevation Panel function via the remote controller or smart control system, the panel descends automatically, allowing effortless access to the air filter for maintenance or replacement.


2-way Installation

Our hangers with optimized anti-cutting design are easy to grab and lift up, preventing hands from scratching by the sharp edge.



Push-in Installation

An unique & exclusive Push-In Case is designed for easy installation options. Installers can plug in the cassette body unit between the joist and fix it on the beams with screws

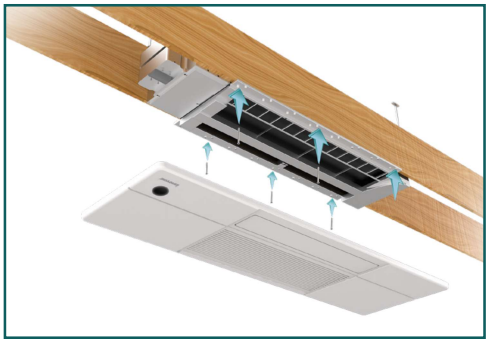

CONSOLE

Model #		MCW12H2MHRA	MCW16H2BHRA
Cooling/Heating capacity	Btu/h	11500 / 12000	17000 / 16000
Power	V/Hz/f	208-230V~,60Hz,1P	208-230V~,60Hz,1P
Air flow (TurboH/M/L)	CFM	441/377/324/188	500/441/383/324
Noise Level (Sound Pressure)	dB(A)	42/39/35/30	42/39/29
Net Dimension (WxDxH)	inch	31 ½ x 8 x 24 ½	31 ½ x 8 x 24 ½
Net Weight	lbs	33	33

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.



MULTI INDOOR UNITS COMBINATION

MULTI INDOOR UNITS COMBINATION RULE (30K and 36K Only for Highwall & AHU)

Outdoor Unit		Optional Combination(Only run)					
		One unit	Two units	Three units	Four units	Five units	Six units
1drive 3	MOM18H2BH3A	12	6+6	6+6+6			
		18	6+9	6+6+9			
			6+12	6+9+9			
			6+18				
			9+9				
			9+12				
			12+12				
1 drive 4	MOM27H2BH4A	18	6+6	6+6+6	6+6+6+6		
		24	6+9	6+6+9	6+6+6+9		
			6+12	6+6+12	6+6+6+12		
			6+18	6+6+18	6+6+9+9		
			6+24	6+6+24	6+6+9+12		
			9+9	6+9+9	6+9+9+9		
			9+12	6+9+12	6+9+9+12		
			9+18	6+9+18	9+9+9+9		
			9+24	6+12+12			
			12+12	6+12+18			
			12+18	9+9+9			
			12+24	9+9+12			
			18+18	9+9+18			
				9+12+12			
				12+12+12			
1 drive 5	MOM36H2BH5A	24	6+18	6+6+6	6+6+6+6	6+6+6+6+6	
		30	6+24	6+6+9	6+6+6+9	6+6+6+6+9	
			9+9	6+6+12	6+6+6+12	6+6+6+6+12	
			9+12	6+6+18	6+6+6+18	6+6+6+6+18	
			9+18	6+6+24	6+6+6+24	6+6+6+9+9	
			9+24	6+9+9	6+6+9+9	6+6+6+9+12	
			12+12	6+9+12	6+6+9+12	6+6+6+9+18	
			12+18	6+9+18	6+6+9+18	6+6+9+9+9	
			12+24	6+9+24	6+6+9+24	6+6+9+9+12	
			18+18	6+12+12	6+6+12+12	6+6+9+9+18	
				6+12+18	6+6+12+18	6+9+9+9+9	
				6+12+24	6+6+12+24	6+9+9+9+12	
				6+18+18	6+6+18+18	6+9+9+9+18	
				9+9+9	6+9+9+9	9+9+9+9+9	
				9+9+12	6+9+9+12	9+9+9+9+12	
				9+9+18	6+9+9+18		
				9+9+24	6+9+9+24		
				9+12+12	6+9+12+12		
				9+12+18	6+9+12+18		
				9+12+24	6+12+12+12		
				9+18+18	6+12+12+18		
				12+12+12	9+9+9+9		
				12+12+18	9+9+9+12		
				12+12+24	9+9+9+18		
				12+18+18	9+9+12+12		
					9+9+12+18		
					9+12+12+12		
					12+12+12+12		
1 drive 6	MOM48H2BH6A	30	6+24	6+6+18	6+6+6+6	6+6+6+6+6	6+6+6+6+6+6
		36	6+30	6+6+24	6+6+6+9	6+6+6+6+9	6+6+6+6+6+9
			6+36	6+6+30	6+6+6+18	6+6+6+6+12	6+6+6+6+6+12
			9+18	6+6+36	6+6+6+24	6+6+6+6+18	6+6+6+6+6+18
			9+24	6+9+12	6+6+9+9	6+6+6+6+24	6+6+6+6+9+9
			9+30	6+9+18	6+6+9+12	6+6+6+9+9	6+6+6+6+9+12
			9+36	6+9+24	6+6+9+18	6+6+6+9+12	6+6+6+6+9+18
			12+12	6+9+30	6+6+9+24	6+6+6+9+18	6+6+6+6+12+12
			12+18	6+9+36	6+6+12+12	6+6+6+9+24	6+6+6+6+12+18
			12+24	6+12+18	6+6+12+18	6+6+6+12+12	6+6+6+9+9+9
			12+30	6+12+24	6+6+12+24	6+6+6+12+18	6+6+6+9+9+12
			12+36	6+12+30	6+6+18+18	6+6+6+12+24	6+6+6+9+9+18
			18+18	6+12+36	6+6+18+24	6+6+6+18+18	6+6+6+9+12+12
			18+24	6+18+18	6+9+9+9	6+6+6+18+24	6+6+6+9+12+18
			18+30	6+18+24	6+9+9+12	6+6+9+9+9	6+6+6+12+12+12
			18+36	6+18+30	6+9+9+18	6+6+9+9+12	6+6+6+12+12+18
			24+24	6+18+36	6+9+9+24	6+6+9+9+18	6+6+9+9+9+9
			24+30	9+9+9	6+9+12+12	6+6+9+9+24	6+6+9+9+9+12
			24+36	9+9+12	6+9+12+18	6+6+9+12+12	6+6+9+9+9+18
				9+9+18	6+9+12+24	6+6+9+12+18	6+6+9+9+12+12
				9+9+24	6+9+18+18	6+6+9+12+24	6+6+9+9+12+18
				9+9+30	6+9+18+24	6+6+9+18+18	6+6+9+12+12+12
				9+9+36	6+12+12+12	6+6+9+18+24	6+6+9+12+12+18
				9+12+12	6+12+12+18	6+6+12+12+12	6+9+9+9+9+9
				9+12+18	6+12+12+24	6+6+12+12+18	6+9+9+9+9+12
				9+12+24	6+12+18+18	6+6+12+12+24	6+9+9+9+9+18
				9+12+30	6+12+18+24	6+6+12+18+18	6+9+9+9+12+12
				9+12+36	9+9+9+9	6+9+9+9+9	6+9+9+9+12+18
				9+18+18	9+9+9+12	6+9+9+9+12	6+9+9+12+12+12
				9+18+24	9+9+9+18	6+9+9+9+18	9+9+9+9+9+9
				9+18+30	9+9+9+24	6+9+9+9+24	9+9+9+9+9+12
				9+18+36	9+9+12+12	6+9+9+12+12	9+9+9+9+9+18
				12+12+12	9+9+12+18	6+9+9+12+18	9+9+9+9+12+12
				12+12+18	9+9+12+24	6+9+9+12+24	9+9+9+12+12+12
				12+12+24	9+9+18+18	6+9+9+18+18	
				12+12+30	9+9+18+24	6+9+12+12+12	
				12+12+36	9+12+12+12	6+9+12+12+18	
				12+18+18	9+12+12+18	6+9+12+12+24	
				12+18+24	9+12+12+24	6+9+12+18+18	
				12+18+30	9+12+18+18	6+12+12+12+12	
				18+18+18	9+12+18+24	6+12+12+12+18	
					9+18+18+18	9+9+9+9+9	
					12+12+12+12	9+9+9+9+12	
					12+12+12+18	9+9+9+9+18	
					12+12+12+24	9+9+9+9+24	
					12+12+18+18	9+9+9+12+12	
						9+9+9+12+18	
						9+9+9+12+24	
						9+9+9+18+18	
						9+9+12+12+12	

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.

1 drive 6	MOM48H2BH6A					9+9+12+12+18 9+12+12+12+12 9+12+12+12+18 12+12+12+12+12	
		30	6+24	6+6+18	6+6+6+6	6+6+6+6+6	6+6+6+6+6+6
		36	6+30	6+6+24	6+6+6+9	6+6+6+6+9	6+6+6+6+6+9
			6+36	6+6+30	6+6+6+12	6+6+6+6+12	6+6+6+6+6+12
			9+18	6+6+36	6+6+6+18	6+6+6+6+18	6+6+6+6+6+18
			9+24	6+9+9	6+6+6+24	6+6+6+6+24	6+6+6+6+6+24
			9+30	6+9+12	6+6+9+9	6+6+6+9+9	6+6+6+6+9+9
			9+36	6+9+18	6+6+9+12	6+6+6+9+12	6+6+6+6+9+12
			12+12	6+9+24	6+6+9+18	6+6+6+9+18	6+6+6+6+9+18
			12+18	6+9+30	6+6+9+24	6+6+6+9+24	6+6+6+6+9+24
			12+24	6+9+36	6+6+12+12	6+6+6+12+12	6+6+6+6+12+12
			12+30	6+12+12	6+6+12+18	6+6+6+12+18	6+6+6+6+12+18
			12+36	6+12+18	6+6+12+24	6+6+6+12+24	6+6+6+6+12+24
			18+18	6+12+24	6+6+18+18	6+6+6+18+18	6+6+6+9+9+9
			18+24	6+12+30	6+6+18+24	6+6+6+18+24	6+6+6+9+9+12
			18+30	6+12+36	6+9+9+9	6+6+9+9+9	6+6+6+9+9+18
			18+36	6+18+18	6+9+9+12	6+6+9+9+12	6+6+6+9+9+24
			24+24	6+18+24	6+9+9+18	6+6+9+9+18	6+6+6+9+12+12
			24+30	6+18+30	6+9+9+24	6+6+9+9+24	6+6+6+9+12+18
			24+36	6+18+36	6+9+12+12	6+6+9+12+12	6+6+6+9+12+24
				9+9+9	6+9+12+18	6+6+9+12+18	6+6+6+12+12+12
				9+9+12	6+9+12+24	6+6+9+12+24	6+6+6+12+12+18
				9+9+18	6+9+18+18	6+6+9+18+18	6+6+6+12+12+24
				9+9+24	6+9+18+24	6+6+9+18+24	6+6+9+9+9+9
				9+9+30	6+12+12+12	6+6+12+12+12	6+6+9+9+9+12
				9+9+36	6+12+12+18	6+6+12+12+18	6+6+9+9+9+18
				9+12+12	6+12+12+24	6+6+12+12+24	6+6+9+9+9+24
				9+12+18	6+12+18+18	6+6+12+18+18	6+6+9+9+12+12
				9+12+24	6+12+18+24	6+6+12+18+24	6+6+9+9+12+18
				9+12+30	6+18+18+18	6+6+18+18+18	6+6+9+9+12+24
				9+12+36	6+18+18+24	6+6+18+18+24	6+6+9+12+12+12
				9+18+18	9+9+9+9	6+9+9+9+9	6+6+9+12+12+18
				9+18+24	9+9+9+12	6+9+9+9+12	6+6+9+12+12+24
				9+18+30	9+9+9+18	6+9+9+9+18	6+6+12+12+12+12
				9+18+36	9+9+9+24	6+9+9+9+24	6+6+12+12+12+18
				12+12+12	9+9+12+12	6+9+9+12+12	6+6+12+12+12+24
1 drive 6	MOM60H2BH6A			12+12+18	9+9+12+18	6+9+9+12+18	6+9+9+9+9+9
				12+12+24	9+9+12+24	6+9+9+12+24	6+9+9+9+9+12
				12+12+30	9+9+18+18	6+9+9+18+18	6+9+9+9+9+18
				12+12+36	9+9+18+24	6+9+9+18+24	6+9+9+9+9+24
				12+18+18	9+12+12+12	6+9+12+12+12	6+9+9+9+12+12
				12+18+24	9+12+12+18	6+9+12+12+18	6+9+9+9+12+18
				12+18+30	9+12+12+24	6+9+12+12+24	6+9+9+9+12+24
				12+18+36	9+12+18+18	6+9+12+18+18	6+9+9+9+18+18
				18+18+18	9+12+18+24	6+9+12+18+24	6+9+9+12+12+12
					9+18+18+18	6+9+18+18+18	6+9+9+12+12+18
					12+12+12+12	6+12+12+12+12	6+9+9+12+12+24
					12+12+12+18	6+12+12+12+18	6+9+12+12+12+12
					12+12+12+24	6+12+12+12+24	6+9+12+12+12+18
					12+12+18+18	6+12+12+18+18	6+12+12+12+12+12
					12+12+18+24	6+12+18+18+18	6+12+12+12+12+18
					12+18+18+18	9+9+9+9+9	9+9+9+9+9+9
						9+9+9+9+12	9+9+9+9+9+12
						9+9+9+9+18	9+9+9+9+9+18
						9+9+9+9+24	9+9+9+9+9+24
						9+9+9+12+12	9+9+9+9+12+12
						9+9+9+12+18	9+9+9+9+12+18
						9+9+9+12+24	9+9+9+9+12+24
						9+9+9+18+18	9+9+9+12+12+12
						9+9+9+18+24	9+9+9+12+12+18
						9+9+12+12+12	9+9+12+12+12+12
						9+9+12+12+18	9+9+12+12+12+18
						9+9+12+12+24	9+12+12+12+12+12
						9+9+12+18+18	12+12+12+12+12+12
						9+9+12+18+24	
						9+9+18+18+18	
						9+12+12+12+12	
						9+12+12+12+18	
						9+12+12+12+24	
						9+12+12+18+18	
						12+12+12+12+12	
						12+12+12+12+18	
						12+12+12+12+24	
						12+12+12+18+18	

Note:

1. If total indoor units load exceeds nominal capacity of outdoor unit, the practical output capacity of every indoor unit will be correspondingly attenuated. This situation is very evidently during heating mode.
2. If the size of the indoor units are the same, the combinations of small indoor units can be applied to same size units. (For example, the size of 9K and 12K EP are the same, so the 12K unit can be considered as 9K and applied to the combinations of 9K units.)
3. For most efficient 12K EP, it should be considerde as 18K unit in combination chart because it has the same size with regular 18K EP.
4. For One-way Cassette series, it should be considered as 18K unit in combination chart because the 6K/9K/12K/18K sizes are the same.
5. For AHU series:

a, Fan of AHU will stop (follow me On) or intermittently running (follow me Off) when reaches its setting temperature;
b, When connecting to a third-party thermostat via a 24V connection, if the AHU has no heating demand, the fan ON command from the thermostat will be ineffective and the fan will not turn on;
c, System will start running when AHU receive emergency heating demand;

*Specifications are subject to changes without notice. ** Model numbers, pictures, and specifications of all products are subject to change without further notice.

M4+

innovair®

INNOVATIVE IDEAS IN AIR CONDITIONING

DISTRIBUTED BY:

SCAN FOR PRODUCT INFORMATION

0326IM4M+MB