


# Single Stage and 2-Stage Compact Horizontal Packaged Unit

## GEOHERMAL HEAT PUMP TECHNICAL OVERVIEW

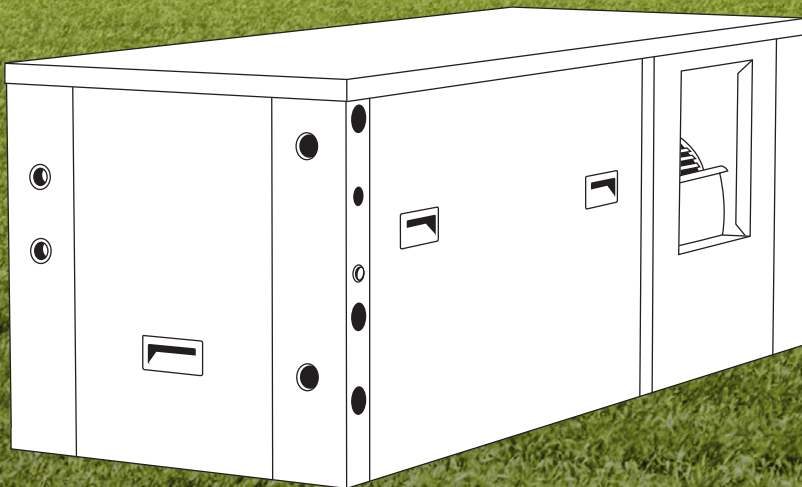

The TETCO Compact Horizontal Packaged System provides efficient comfort in all conditions. These versatile models are smaller than previous TETCO horizontal models, making them better suited for installations where space for mechanical equipment is limited. The narrow width easily fits between 24" trussing.

Horizontal models deliver ducted heating and cooling that can provide a portion of needed domestic hot water. The rugged, galvanized steel cabinet is designed to be installed either on a flat surface, or suspended above a ceiling or similar application. The versatile cabinet can be converted in the field for side or end discharge, with left or right return air.



## Unit Performance

Ground Loop Heat Pump (See the Commercial Product Catalog for Water Loop Heat Pump AHRI performance ratings)

Single Stage Models		Blower	Cooling				Heating				Dimensional Data		
			Full Load	EER	Part Load	EER	Full Load	COP	Part Load	COP	Height	Width	Depth
ZS006	COAX (208-230V 1PH)	PSC	6,900	17.1	—	—	5,200	3.5	—	—	12"	20"	40"
	COAX (265/115V 1PH)	PSC	6,500	16.2	—	—	5,000	3.3	—	—	12"	20"	40"
ZS009	COAX (208/230V 1PH)	PSC	9,600	16.7	—	—	7,500	3.5	—	—	12"	20"	40"
	COAX (265/115V 1PH)	PSC	9,200	15.9	—	—	7,100	3.3	—	—	12"	20"	40"
ZS012	COAX (208/230V 1PH)	PSC	11,300	14.1	—	—	9,500	3.2	—	—	12"	20"	40"
ZS015	BPHE (208/230V 1PH)	PSC	15,300	19.2	—	—	11,100	3.8	—	—	17"	21"	40"
		ECM	15,200	20.3	—	—	10,900	3.9	—	—			
	COAX (208/230V 1PH)	PSC	14,500	17.1	—	—	11,300	3.9	—	—	17"	21"	40"
		ECM	14,200	17.6	—	—	11,200	3.9	—	—			
ZS017	BPHE (208/230V 1PH)	PSC	18,300	18.6	—	—	13,400	3.7	—	—	17"	21"	40"
		ECM	18,100	20.5	—	—	13,000	3.8	—	—			
	COAX (208/230V 1PH)	PSC	17,900	17.1	—	—	13,700	3.7	—	—	17"	21"	40"
		ECM	17,800	18.2	—	—	13,500	3.9	—	—			
ZS018	BPHE (208/230V 1PH)	PSC	20,500	18.2	—	—	14,400	3.6	—	—	19.25"	21.75"	52"
		ECM	20,800	20.5	—	—	14,200	3.8	—	—			
	COAX (208/230V 1PH)	PSC	19,400	15.5	—	—	14,800	3.5	—	—	19.25"	21.75"	52"
		ECM	20,100	18.7	—	—	14,100	3.7	—	—			
ZS024	BPHE (208/230V 1PH)	PSC	25,200	18.7	—	—	18,600	3.7	—	—	19.25"	21.75"	52"
		ECM	26,100	21.5	—	—	18,600	3.9	—	—			
	COAX (208/230V 1PH)	PSC	25,700	17.4	—	—	18,500	3.6	—	—	19.25"	21.75"	52"
		ECM	26,200	19.6	—	—	18,000	3.9	—	—			
ZS030	BPHE (208/230V 1PH)	PSC	30,300	19.1	—	—	21,900	3.7	—	—	19.25"	21.75"	52"
		ECM	30,700	20.7	—	—	21,500	4.0	—	—			
ZS030	COAX (208/230V 1PH)	PSC	29,700	17.7	—	—	22,900	3.6	—	—	19.25"	21.75"	52"
		ECM	29,000	18.8	—	—	21,700	3.8	—	—			
ZS036	BPHE (208/230V 1PH)	PSC	37,600	18.1	—	—	27,800	3.7	—	—	21.25"	21.75"	56"
		ECM	38,400	19.5	—	—	27,600	4.0	—	—			
ZS036	COAX (208/230V 1PH)	PSC	36,600	17.9	—	—	28,300	3.7	—	—	21.25"	21.75"	56"
		ECM	37,200	18.8	—	—	27,500	3.9	—	—			
ZS042	BPHE (208/230V 1PH)	PSC	43,400	19.8	—	—	32,800	3.9	—	—	21.25"	21.75"	56"
		ECM	44,100	21.1	—	—	32,200	4.1	—	—			
ZS042	COAX (208/230V 1PH)	PSC	41,100	17.9	—	—	31,700	3.7	—	—	21.25"	21.75"	56"
		ECM	40,700	19.2	—	—	30,200	3.8	—	—			
ZS048	BPHE (208/230V 1PH)	PSC	48,500	17.8	—	—	38,500	3.6	—	—	21.25"	21.75"	56"
		ECM	50,400	19.1	—	—	37,800	3.8	—	—			
ZS048	COAX (208/230V 1PH)	PSC	48,600	17.0	—	—	37,800	3.5	—	—	21.25"	21.75"	56"
		ECM	49,300	17.4	—	—	36,200	3.6	—	—			
ZS060	BPHE (208/230V 1PH)	PSC	60,500	17.8	—	—	49,200	3.8	—	—	21.25"	24"	61"
		ECM	60,700	19.5	—	—	48,200	4.0	—	—			
ZS060	COAX (208/230V 1PH)	PSC	57,000	16.1	—	—	48,400	3.5	—	—	21.25"	24"	61"
		ECM	57,000	17.5	—	—	46,200	3.6	—	—			
ZS072	BPHE (208/230V 1PH)	PSC	70,600	17.2	—	—	57,400	3.5	—	—	21.25"	24"	61"
		ECM	72,100	17.7	—	—	56,600	3.7	—	—			
ZS072	COAX (208/230V 1PH)	PSC	70,200	15.3	—	—	56,200	3.2	—	—	21.25"	24"	61"
		ECM	71,200	15.7	—	—	56,200	3.3	—	—			
Two Stage Models		Blower	Cooling				Heating				Dimensional Data		
			Full Load	EER	Part Load	EER	Full Load	COP	Part Load	COP	Height	Width	Depth
ZT024	BPHE (208/230V 1PH)	ECM	26,800	19.8	20,700	28.8	18,100	4.0	14,900	4.3	19.25"	21.75"	52"
	COAX (208/230V 1PH)	ECM	26,400	18.3	20,000	25.0	18,300	3.9	14,500	4.1	19.25"	21.75"	52"
ZT030	BPHE (208/230V 1PH)	ECM	32,000	18.0	24,800	24.9	22,600	3.7	18,700	4.0	19.25"	21.75"	52"
	COAX (208/230V 1PH)	ECM	31,500	17.5	23,900	22.7	23,300	3.7	19,300	4.0	19.25"	21.75"	52"
ZT036	BPHE (208/230V 1PH)	ECM	38,200	19.9	28,900	29.8	27,600	4.1	21,200	4.4	21.25"	21.75"	56"
	COAX (208/230V 1PH)	ECM	36,700	17.9	28,100	26.6	27,100	3.8	22,000	4.3	21.25"	21.75"	56"
ZT042	BPHE (208/230V 1PH)	ECM	42,600	19.1	33,100	26.2	31,500	3.7	25,800	4.0	21.25"	21.75"	56"
	COAX (208/230V 1PH)	ECM	43,000	18.0	33,500	25.3	32,900	3.6	26,400	4.1	21.25"	21.75"	56"
ZT048	BPHE (208/230V 1PH)	ECM	49,800	18.3	39,700	26.6	37,900	3.9	29,600	4.3	21.25"	21.75"	56"
	COAX (208/230V 1PH)	ECM	48,700	17.3	38,000	24.4	36,900	3.6	29,300	4.1	21.25"	21.75"	56"
ZT060	BPHE (208/230V 1PH)	ECM	61,200	18.7	47,300	26.9	48,100	3.9	34,200	4.1	21.25"	24"	61"
	COAX (208/230V 1PH)	ECM	59,000	16.9	45,800	23.7	46,800	3.6	36,400	4.0	21.25"	24"	61"
ZT072	BPHE (208/230V 1PH)	ECM	70,400	18.0	57,100	25.2	57,900	3.8	47,600	4.2	21.25"	24"	61"
	COAX (208/230V 1PH)	ECM	69,500	15.6	56,000	21.3	55,500	3.4	44,400	3.8	21.25"	24"	61"

**Notes:**  
 2-stage models rated with ECM blower • Rated in accordance with AHRI/ISO standard 13256-1, which includes pump penalties • Heating capacities based on 68.0°F DB, 59.0°F WB entering air temperature  
 • Cooling capacities based on 80.6°F DB, 66.2°F WB entering air temperature • Entering water temperatures Full Load: 32°F heating / 77°F cooling • Entering water temperatures Part Load: 41°F heating / 68°F cooling • Data subject to change





#### Available Voltages:


208/230V, 60Hz, 1Ph/3Ph

265V, 60Hz, 1Ph


460V, 60Hz, 3Ph

115V, 60Hz, 1Ph

Note: not all sizes are available in all voltages




High Density Closed Cell Foam insulation helps absorb sound. This insulation is UL GREENGUARD Certified, meaning improved air quality and low chemical emissions.





All-Aluminum Microchannel Air Coil eliminates failure caused by corrosion, improves heat transfer. Better efficiency means lower operating costs.




Variable Speed ECM Blower Motor matches to ductwork to deliver optimum airflow, plus has multiple CFM settings to fit any installation. *(Optional on single-stage models, standard on 2-stage)*



Foam enclosed stainless steel Braze Plate Heat Exchanger boosts unit efficiency. It requires less refrigerant charge and reduces unit weight.

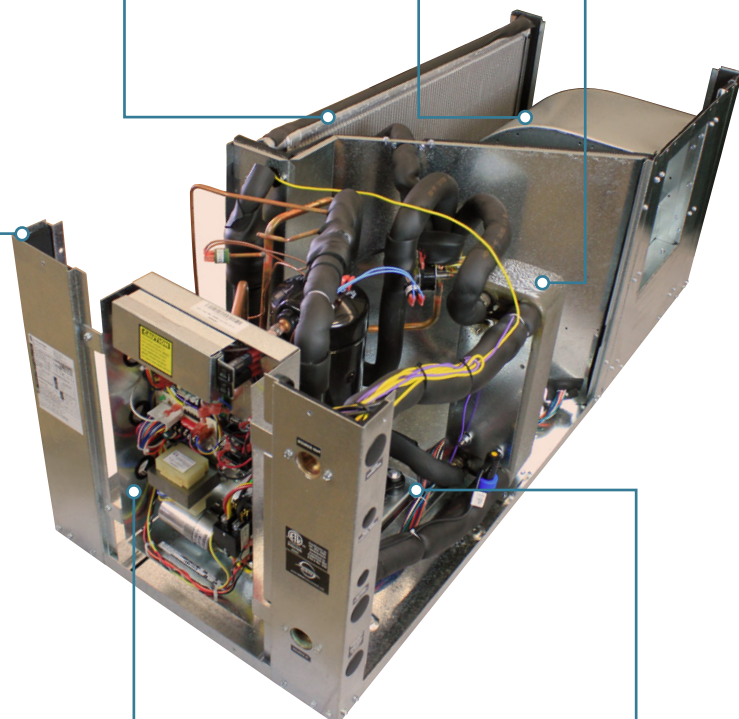

Digital Controls ensure proper operation, providing user-friendly diagnostics. Control box swings out for quick access to internal components.



Elastomeric Compressor Vibration Absorption Pads provide superior sound and vibration insulation, resulting in quiet operation.

## Additional Features

**Field convertible side or end supply air discharge** with left or right hand return air.

**Factory installed desuperheater** (hot water generator) allows the capture of free unused heat, which is used to heat domestic water. This application can cut hot water costs by 25% - 40%.

Source side **FPT fittings**.

Stainless steel **braze plate heat exchanger** (sizes 015 - 072) is protected by a sensor and flow switch. The BPHX is foam enclosed to prevent condensation. A **coax heat exchanger** is available for all sizes.

**Standard PSC blower motor** or optional ECM motor on single stage models. **ECM motor standard** on 2-stage models.

The **stainless steel drain pan** won't rust or corrode, while a **condensate overflow sensor** guards against clogged condensate drains.

**Mechanical TXV** (thermal expansion valve) for extended range operation.

**Airtight blower section** allows for refrigerant and electrical service work during operation.

Optional **DDC** (direct digital controls) with Modbus, Lonworks, or Bacnet protocols for building automation systems needs.

High density **UL GREENGUARD Gold certified foam insulation** improves sound absorption and has better air quality.

All **cabinet panels removable** for ease of installation and service.

Water and electrical connections conveniently located on front corner post.

**Meets ENERGY STAR® requirements** and qualifies for US federal tax credits. Other rebates and incentives may be available in your area.







**ION**

**TETCO**  
Thermal Energy Transfer Company  
**geothermal**

**COMMERCIAL  
SERIES**

[www.tetcogeo.com](http://www.tetcogeo.com)

2506 South Elm Street  
Greenville, IL 62246

**ENERTECH**  
*Geothermal Made Better*

Built in Mitchell  
**SOUTH  
DAKOTA**

GeoComfort geothermal systems are manufactured by Enertech Global and proudly built in the Heart of America — Mitchell, South Dakota. Enertech Global systems are built with stringent quality control standards and the most comprehensive testing within the geothermal heating and cooling industry.



Enertech Global is continually working to improve its products. As a result, the design and specifications of each product may change without notice and may not be as described herein. For the most up-to-date information, please visit our website, or contact our Customer Service department at [info@enertechgeo.com](mailto:info@enertechgeo.com). Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely Enertech Global's opinion or commendation of its products.