


WALL AND CEILING LIGHTING - HOGRO PLUS

Impact proof design luminaire for surface and recessed mounting

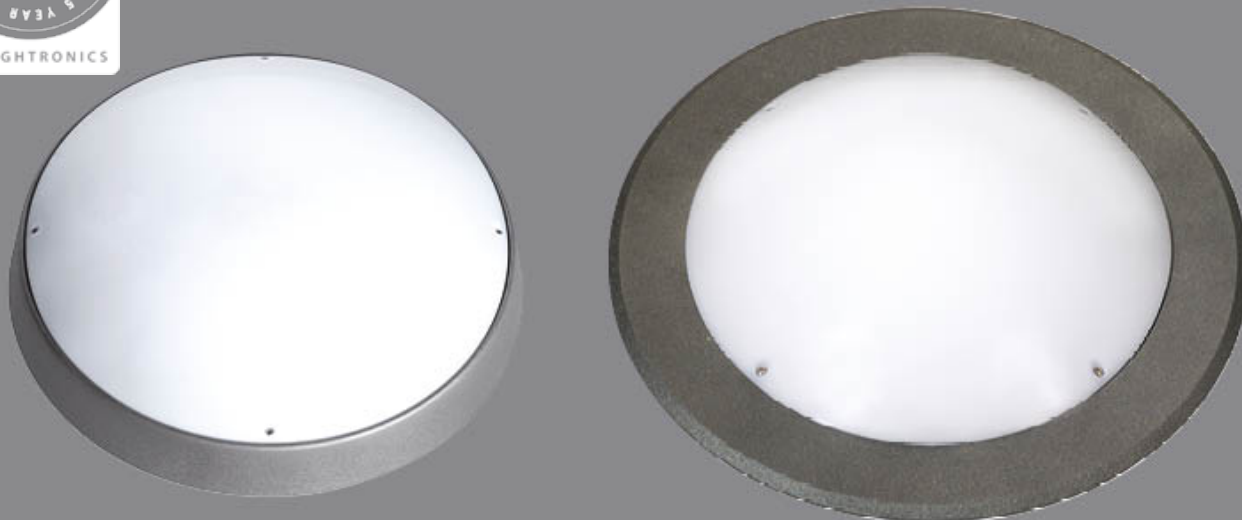

$\geq 5x$ IK 10	IP 65
CE	F
*	EASY LIGHT
*	COMFORT LIGHT
*	COMFORT CONTROL
*	TOP SMART

\* option

## DOTT M

### Application areas:

- corridors
- elevator lobbies
- entrance
- entrance halls
- stair wells


**Housing:** aluminium coated (DB703) or RAL 9010

**Lightsource:** LED

**Classification:** IP 65

**Impactproof:**  $\geq 5x$  IK 10

### DIMENSIONS IN MM:

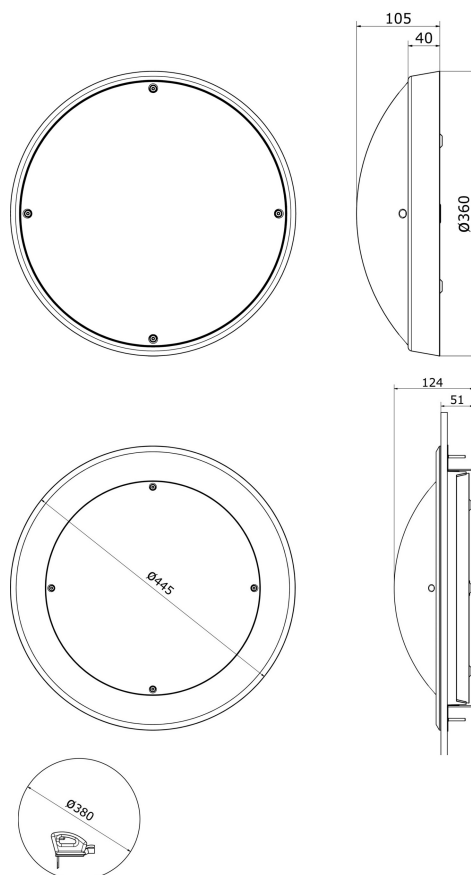

WALL AND CEILING LIGHTING - HOGRO PLUS

Impact proof design luminaire for surface and recessed mounting



LIGHT SOURCE LED	LUMEN OUTPUT (LM) *	EXPECTED LIFESPAN HR **
LED	1270	100,000
LED	1735	100,000
LED	2320	100,000

\* For an up to date lumen-power overview, visit our website: [www.lightronics.eu](http://www.lightronics.eu)


\*\* L70/F10

OPTIONS
colour temperature warm white (3000K)
dimming 1-10V
emergency/continuous lighting, incl. ATF (1 hour)
Loose recessed edge and installation set for flush mount (IP65 guaranteed)
other RAL colour
safety class II
seperate cover opal
vandal resistant flush mount for plate or concrete possible

**Product specifications**

- assembly-, installation- and maintenance-friendly
- cable entry: at the back (middle)
- color temperature neutral white (4000K)
- CRI: > 80
- dimensions recessed (dxh) 445 x 124 mm
- dimensions surface-mounted (dxh) 360 x 105 mm
- lens: UV-stabilised polycarbonate opal or frosted
- Lifetime LED (driver + LED) 100.00Hrs at Tambient is 25°C (L70/F10)
- special coating for coastal areas
- voltage: 230/240V, 50Hz

DOTT M Opal LED

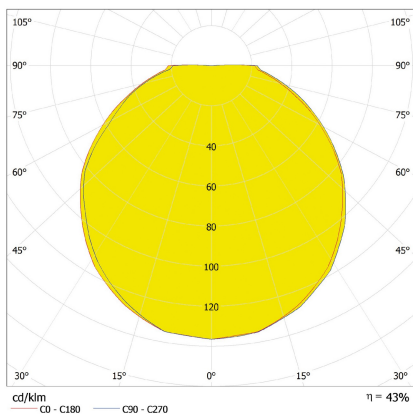

Visit our website for the most up to date information

[www.lightronics.eu](http://www.lightronics.eu)

