Ceramics at Hypersonic Limits

Ceramics Expo 2026
May 5 - 6, 2026
Cleveland, Ohio

Jon Goldsby, PhD. M.B.A
Branch Chief
Ceramic and Polymer Composites
NASA Glenn Research Center
21000 Brookpark Road, Cleveland,
OH 44135-3191

Difference between Airbreathing and Non-Airbreathing

Take off Weight	Aircraft (%)	Rocket (%)
Payload	15	4
Fuel	30	24
Oxygen	0	65
Vehicle	55	7

What are the regimes of flight speed

What is a Mach number M?


Dimensionless Ratio = Vehicle Speed /Speed of Sound at Sea Level 668 mph

New York to Paris

Subsonic	33 hours Ryan NYP (C. Lindberg)
Sonic M1	7 hours Boeing 767 (0.8Mach)
Supersonic M2	3 hours Concorde
Hypersonic M5	1 hour
Re-entry Speed M39	(90 minutes Orion- Artemis II- any where on Earth)




NASA's X-43

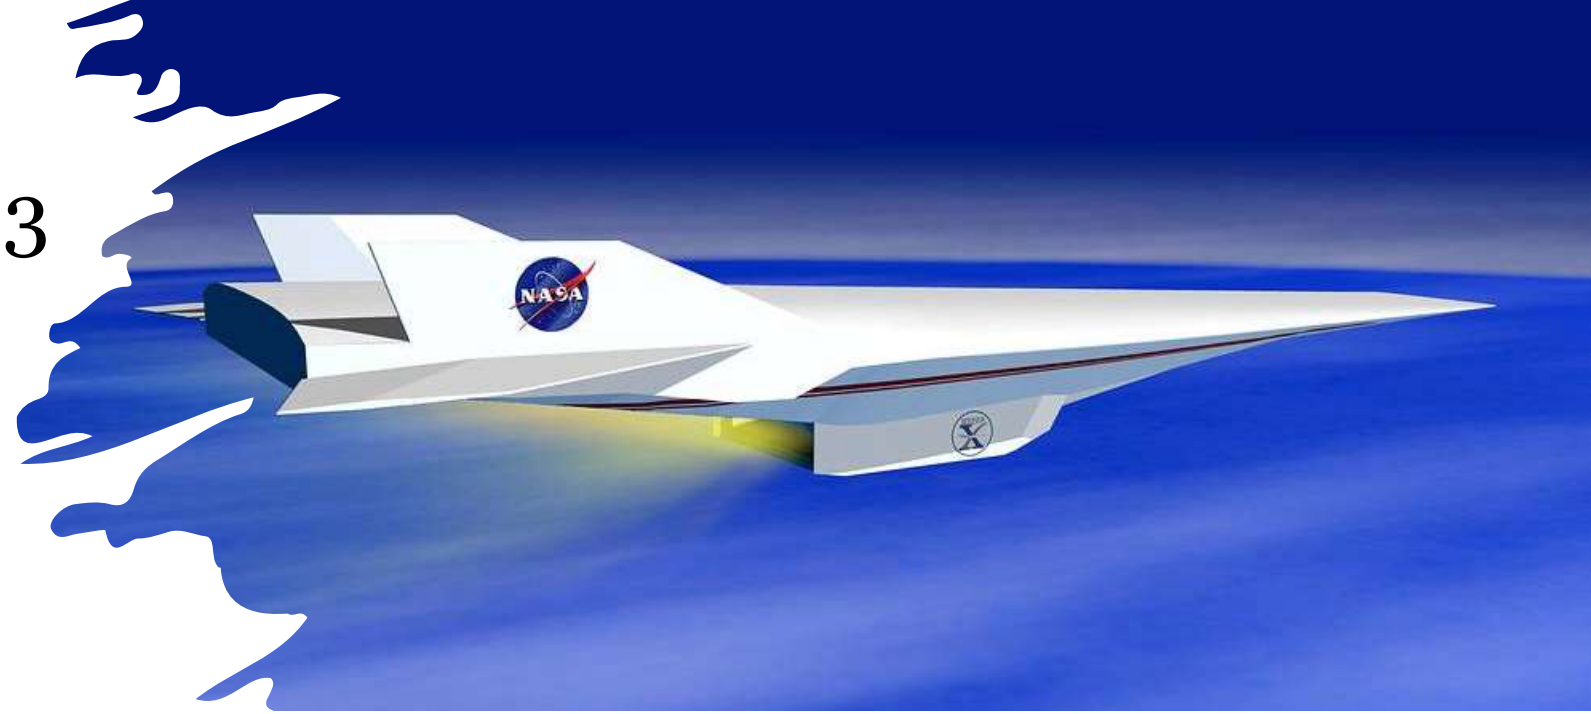

Hypersonic Flight Conditions

At Mach 5 calculations predict the heating on leading edges at 1000 °C

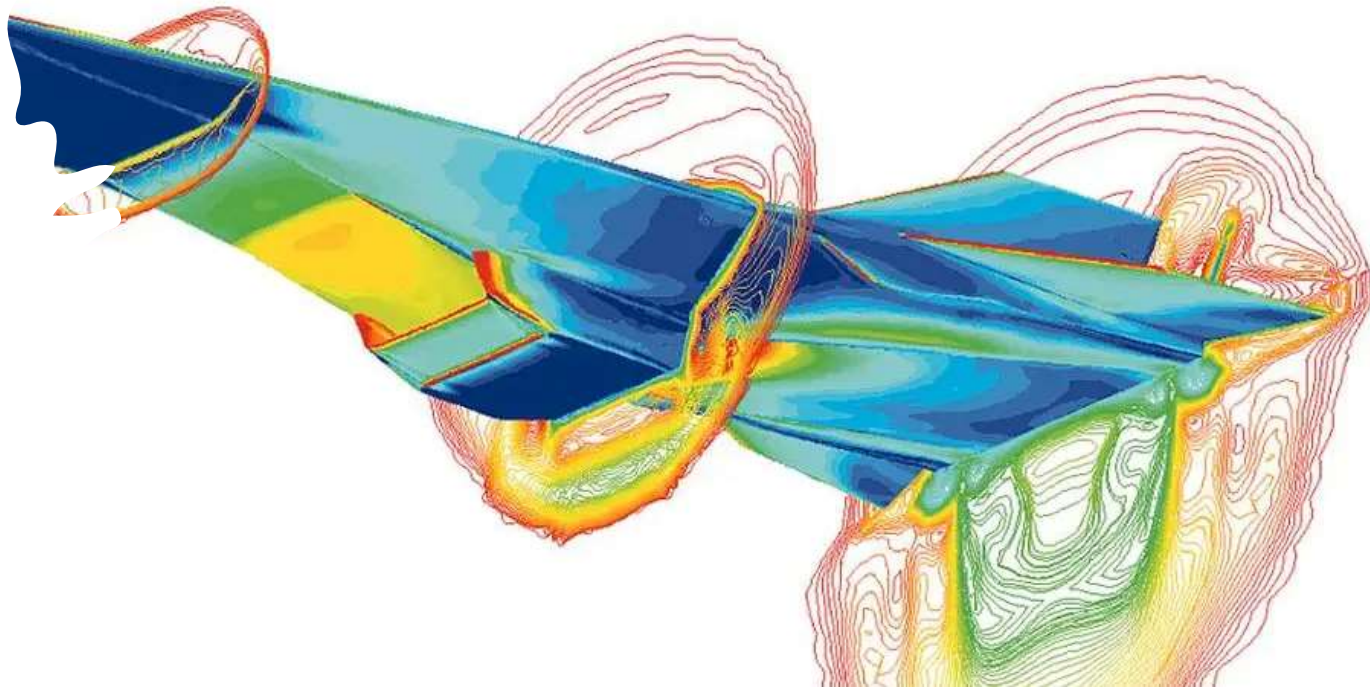

Current High Temperature Materials

Reinforced Carbon-Carbon – Space Shuttle leading edge at 1650 ^{o}C

Silicon Carbide Composites 1200 ^{o}C

(While important, Ablatives don't apply here (Orion))

For hypersonic service we need repeatable exposures

- High temperature durability above 1500 ^{o}C
- Resistance to:
  - Thermal Shock
  - Impingement and erosion
  - Reactive ionized gases

What are Ultra High Temperature Ceramics (UHTC) ?

Refractory Transition Metals Carbides and Borides

Non-oxide- Use temperatures 1800 °C

MC and MB2

M= Zr, Hf, Nb, Ta


Processing Temperatures 2000 °C

Covalently Bonded Compounds


Melt Temperature ~ 3000 °C

Non sintering techniques


- -Chemical Vapor Disposition (CVD, CVI)
- -Reactive Melt Infiltration (MI)
- -Precursor Infiltration and Pyrolysis (PIP)

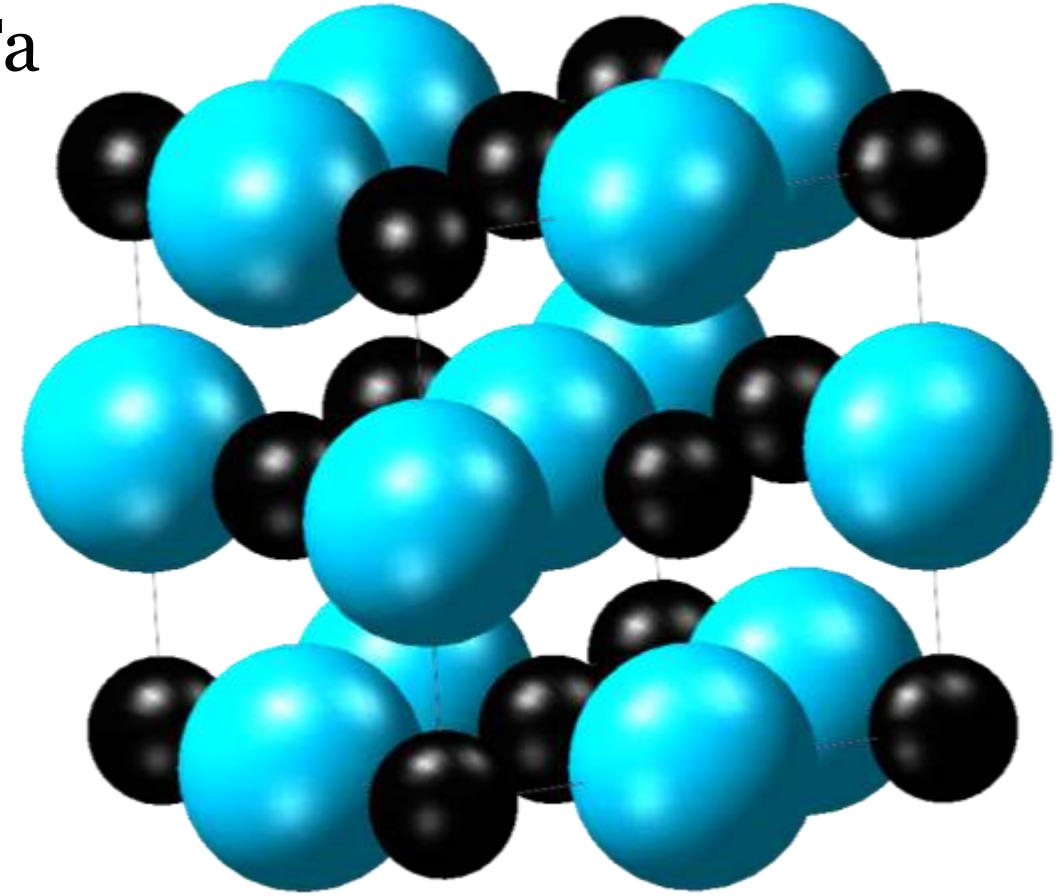


Composite Processing

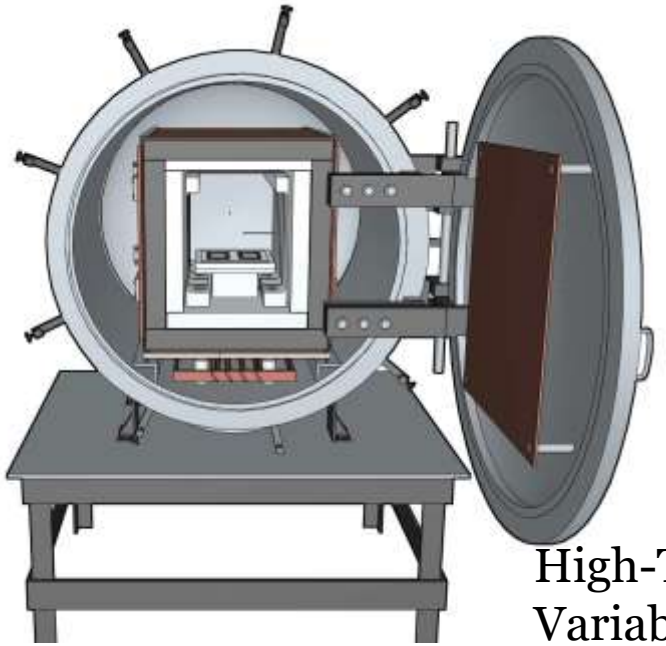


High-Temperature
Variable Environment
Autoclaves

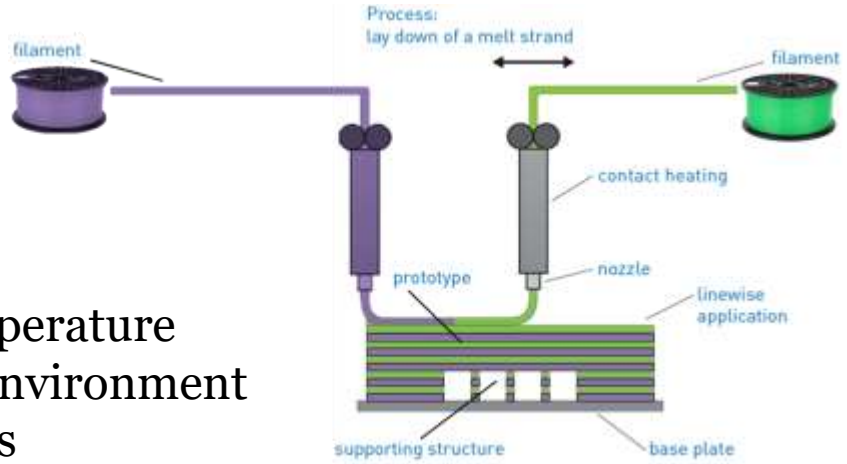

Additive Manufacturing

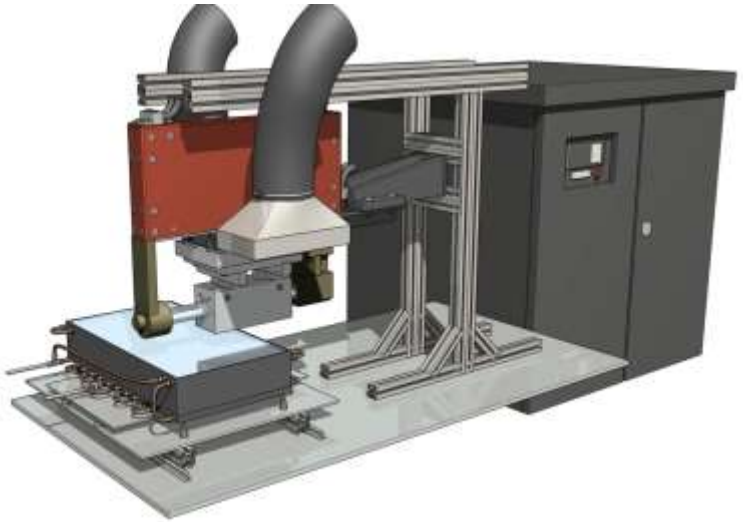


Vortex High heat flux arc-lamp

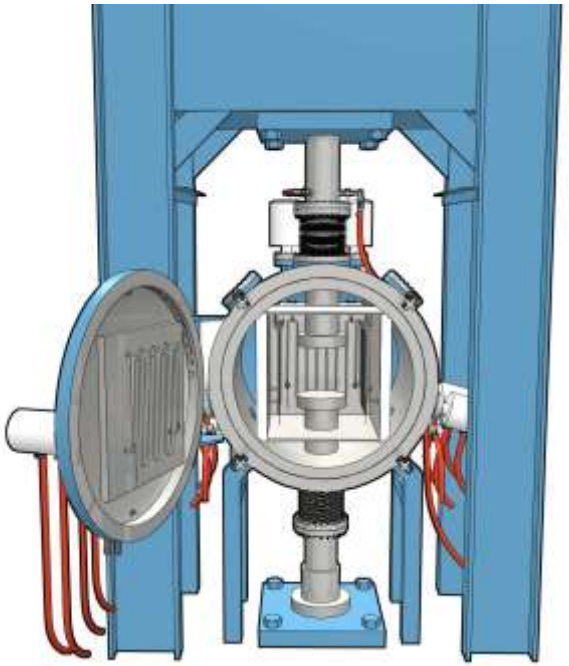


AVS 100-ton large capacity
2000 °C hot press

Wardwell Composite Braider
McClean Anderson Super Hornet
four axis CNC controlled filament winder

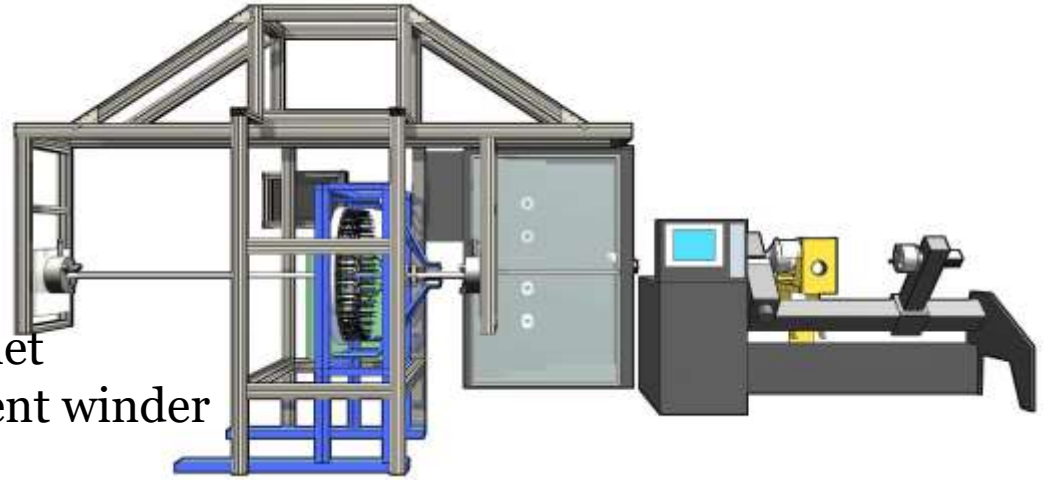

Material Forms Monolithic and Composites

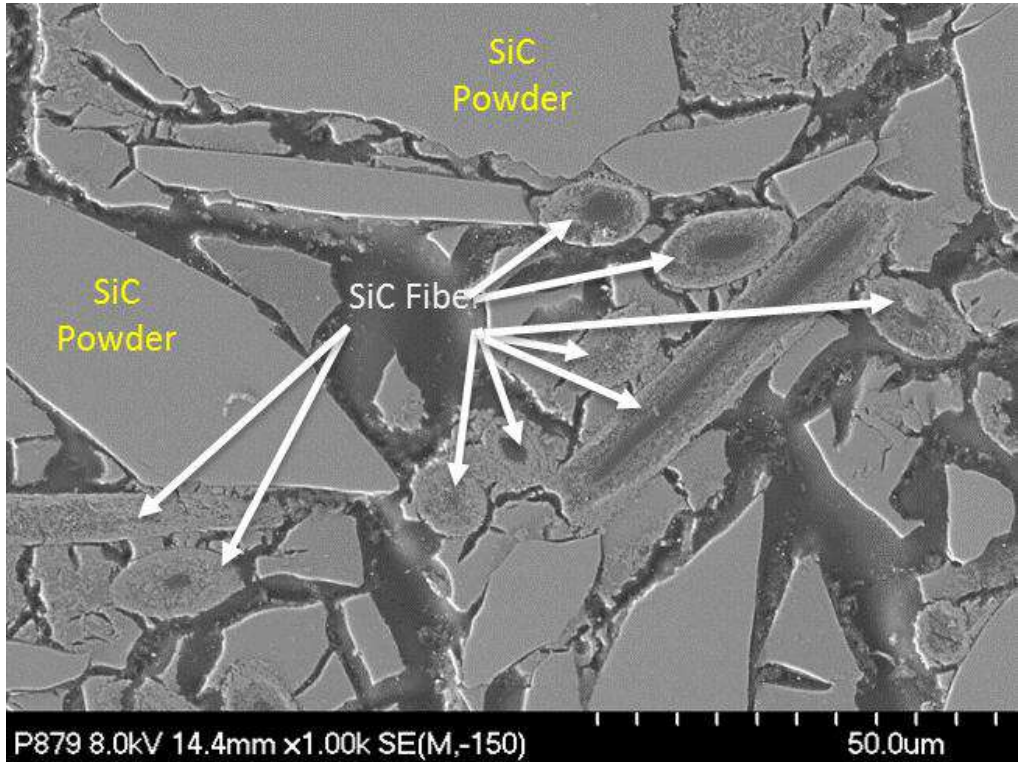

Chopped fiber reinforced ceramic matrix composite

Composite Types

-Two Phase Materials Structure


- Matrix + Particulate
- Matrix + Chopped Fibers
-Matrix + Continuous Fibers (Textiles)

Carbon Fiber Reinforced CMC by CVI :


$HfCl_4$ + Methane + Hydrogen produces HfC + Hydrogen Chloride


Conventional CMC Materials – Hybrid CVI and Melt Infiltrated (MI) SiC/SiC


0-90 Plain Fiber Tow Weave

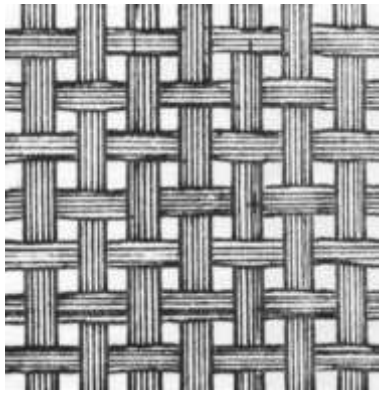

Composite Cross-Section

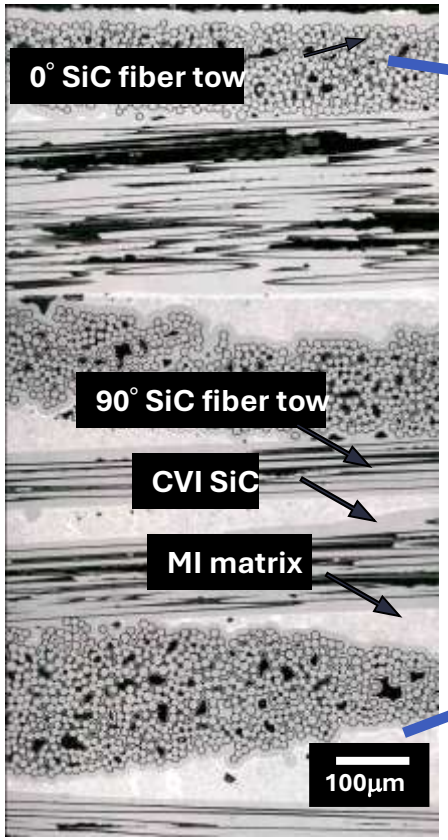

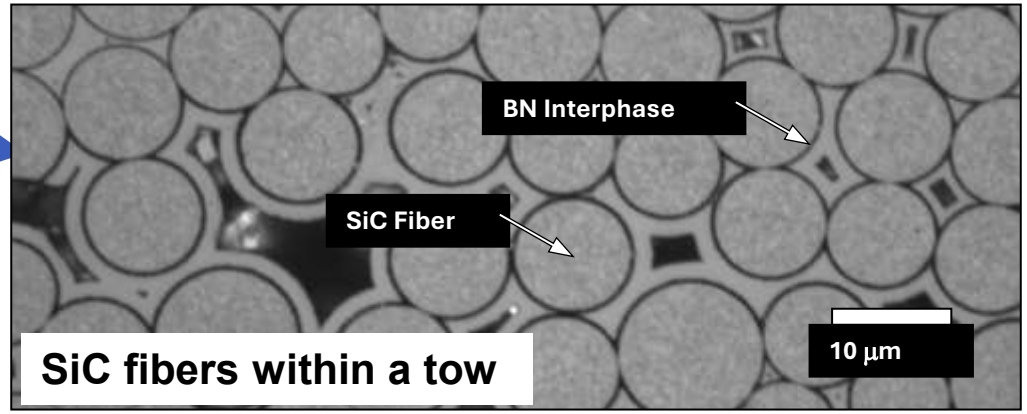


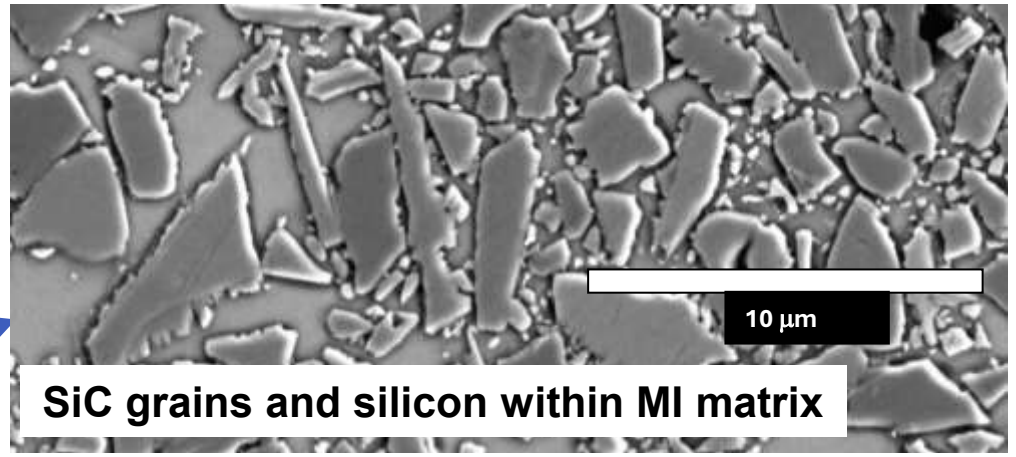


CMC properties:
- High thermal conductivity matrix
- Elimination of interlaminar porosity
- No matrix micro cracking
- Continuous fibers and high fracture toughness
- High strength and temp. capable


Benefits of CMCs in high temperature, structural aerospace applications:
- Higher temp. capability and reduced cooling and weight than for metals.
- Increased fuel efficiency, performance, range, and payload,
- Lower emissions and lower operation costs.

Ceramic Technologies

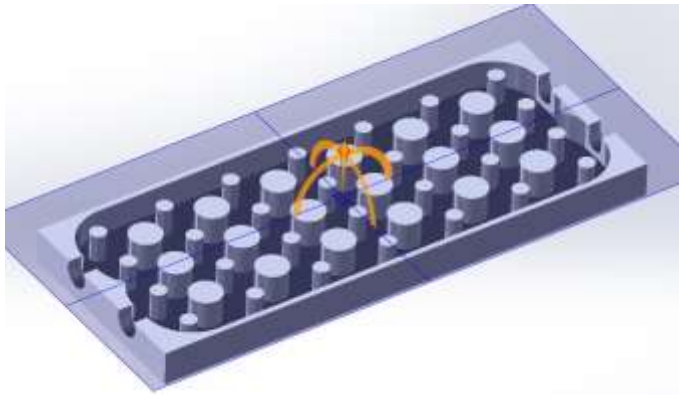



Computational Material Sciences:
Density Functional Theory
Finite Element Analysis
Fiber Architecture Design

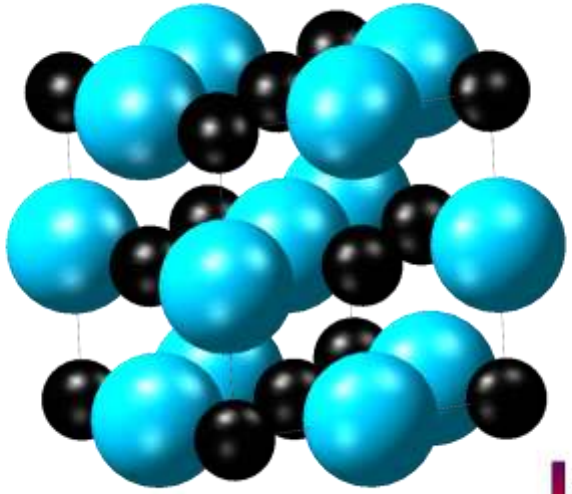

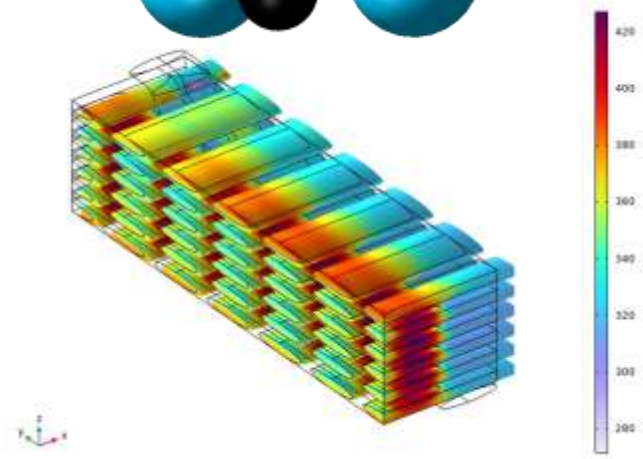

Joining and Integration of Composites to Metals for Applications in Hypersonic Systems

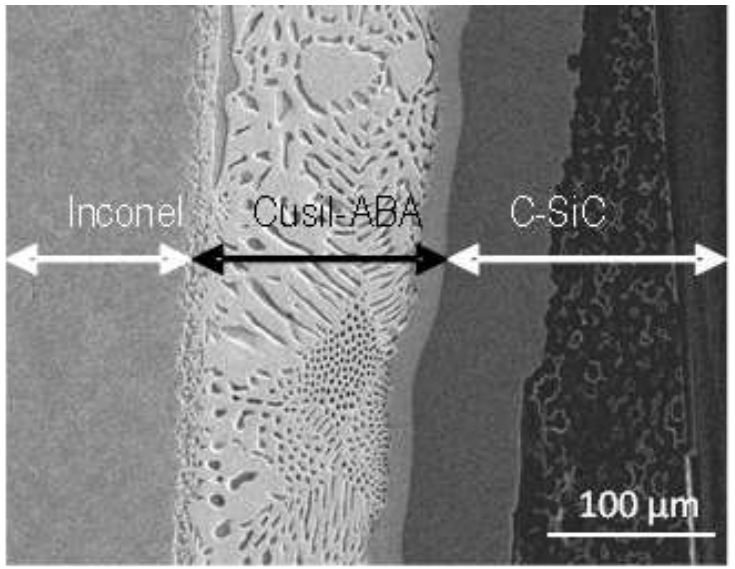

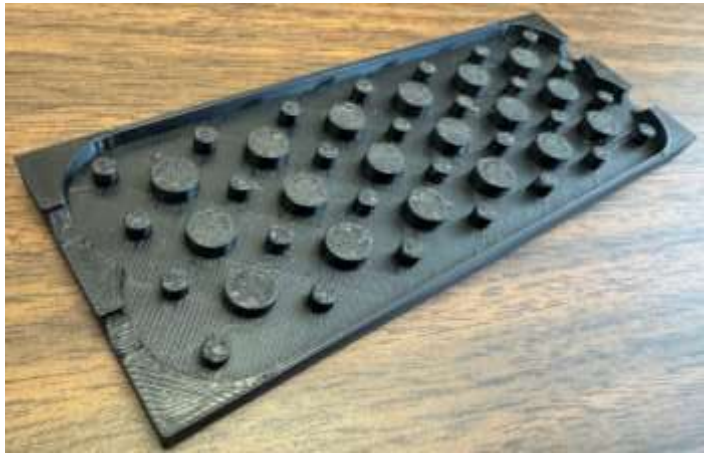



Testing Environment Hierarchy

Testing Hierarchy

- Coupons
- Elements
- Details
- Sub- Components
- Components

Room Temperature Properties

Intrinsic

- Composition
- Density
- Microstructure
- Stiffness (Elastic Constant)
- Thermal Conductivity


Performance in Environment

Temperature

Environment (Steam, air, sand, etc.)

Arc Jet testing


Test Flight

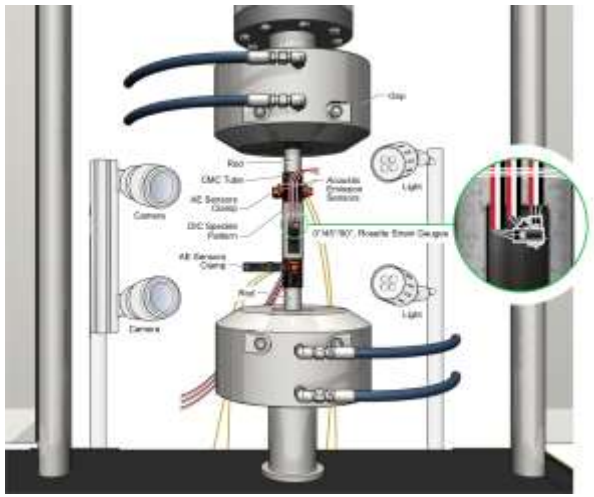



Challenges

- Design
- Fabrication
- Large Scale Fabrication
- Joining, Repair
- Long Term Durability
- Modeling and Simulations

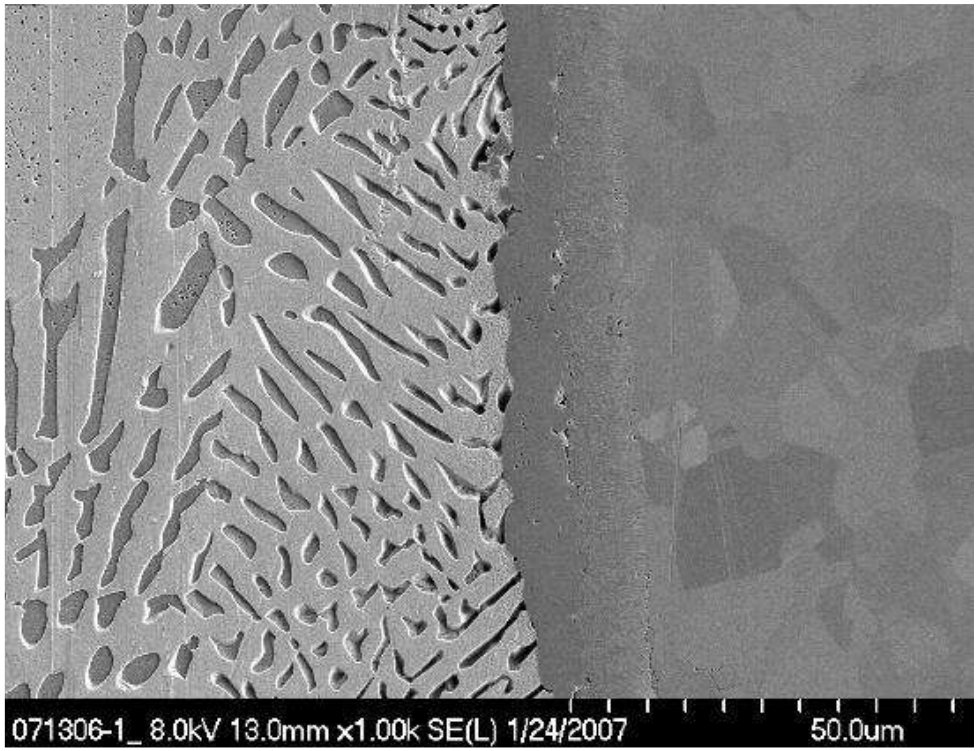

Brazing of Ceramic to Ceramic and Ceramic to Metal Systems