






14' WIDE PEAK

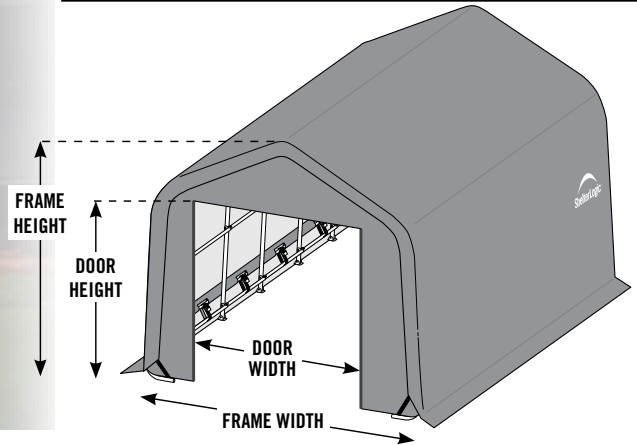


Representative image only. Building sizes vary.




We use galvanized ASTM A500 Grade B/C **USA manufactured carbon steel** for ultimate durability and superior strength. Certified ASTM A653/A653M for ultimate corrosion resistance.



Patented **ShelterLock® Stabilizers** at every lateral purlin connection prevents racking and adds rock-solid strength and stability to the frame.



Our **Ratchet Tite™ Tension System** for cover and end panels help square up the frame while keeping the cover smooth, tight, and neat-looking.



Advanced engineered, commercial grade **cover material** is UV treated inside, outside and in between with added fade blockers and anti-fungal agents. Made to stand up to the elements.

SIZE OPTIONS AND SPECS

Custom lengths available in 4' increments.
2 - 3/8" Pipe Diameter.
 Easy Hook™ anchors (2 per rib)
 Double zippered front door panel
 Alternative anchors sold separately

*Wind and snow loads are given for reference only and assume a securely anchored frame according to local building codes and ordinances. These have been calculated using combined snow and wind provisions in accordance with the following codes:
 United States: IBC 2009 / ASCE 7-05
 Canada: NBCC 2015

These calculations are based on an unoccupied, fully enclosed building. Local building code requirements vary by location; conformance to local codes is the responsibility of the purchaser.

		14' X 10'	14' X 12'	14' X 14'	14' X 16'
	FRAME WIDTH	13'-11"	14'-2"	14'-4"	14'-7"
	FRAME HEIGHT	9'-8"	11'-9"	13'-9"	15'-10"
	DOOR HEIGHT	6'-1"	8'-2"	10'-2"	12'
	TOP DOOR WIDTH	11'	11'	11'	11'
	BOTTOM DOOR WIDTH	11'	11'	11'	11'
U.S.A.	WIND SPEED*	160 MPH	125 MPH	100 MPH	85 MPH
	GROUND SNOW LOAD*	75 PSF	55 PSF	50 PSF	45 PSF
CANADA	WIND PRESSURE*	0.96 kPa	0.70 kPa	0.52 kPa	0.39 kPa
	SNOW PRESSURE*	4.24 kPa	4.20 kPa	3.96 kPa	3.58 kPa

COVER OPTIONS[†]

COLOR WEIGHT
 * **Heavy Duty:** 14.5 oz. Gray, Green, Tan, White
 * **Ultra Duty:** 21.5 oz. Hunter Green, White



[†] All fabric weight calculations are in oz. per m².
 * Fire rated FR fabric CPAI 84 Section 6 and NFPA 701 compliant.

WARRANTY INFO

	Cover	Back panel/door	Frame
Heavy Duty	10 years Prorated	3 years Prorated	3 years Prorated
Ultra Duty	15 years Prorated	3 years Prorated	3 years Prorated