






## 14' Wide ROUND

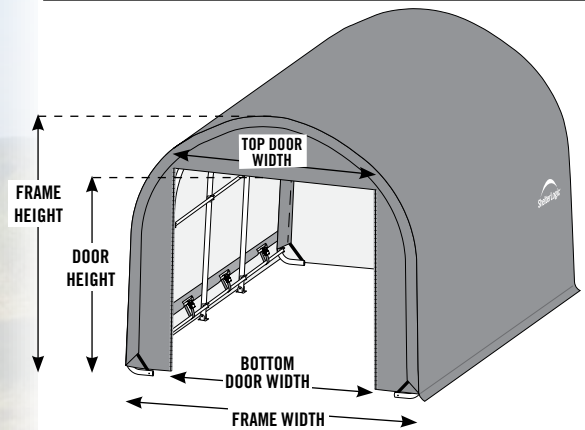


Representative image only. Building sizes vary.




We use galvanized ASTM A500 Grade B/C **USA manufactured carbon steel** for ultimate durability and superior strength. Certified ASTM A653/A653M for ultimate corrosion resistance.



Patented **ShelterLock® Stabilizers** at every purlin connection prevents racking and adds rock-solid strength and stability to frame.



Our **Ratchet Tite™ Tension System** for cover and end panels help square up the frame while keeping the cover smooth, tight, and neat-looking.



Advanced engineered, commercial grade **cover material** is UV treated inside, outside and in between with added fade blockers and anti-fungal agents. Made to stand up to the elements.

### SIZE OPTIONS AND SPECS

Custom lengths available in 5' increments.  
**2 7/8" Pipe Diameter.**  
 EasyHook™ anchors (2 per rib)  
 Double zippered front door panel  
 Alternative anchors sold separately

\*Wind and snow loads are given for reference only and assume a securely anchored frame according to local building codes and ordinances. These have been calculated using combined snow and wind provisions in accordance with the following codes:  
 United States: IBC 2009 / ASCE 7-05  
 Canada: NBCC 2015

These calculations are based on an unoccupied, fully enclosed building. Local building code requirements vary by location; conformance to local codes is the responsibility of the purchaser.

		14' X 7'	14' X 9'	14' X 11'	14' X 13'	14' X 15'	14' X 17'
<b>FRAME WIDTH</b>		14'	14'-2"	14'-5"	14'-7"	14'-10"	15'
<b>FRAME HEIGHT</b>		7'-1"	9'	11'	13'	15'	17'
<b>DOOR HEIGHT</b>		4'	5'-2"	7'-3"	9'-2"	11'-2"	14'
<b>TOP DOOR WIDTH</b>		10'	11'	11'	11'	11'	10'
<b>BOTTOM DOOR WIDTH</b>		10'	11'	11'	11'	11'	12'4"
U.S.A.	<b>WIND SPEED*</b>	180 MPH	180 MPH	135 MPH	115 MPH	95 MPH	80 MPH
	<b>GROUND SNOW LOAD*</b>	120 PSF	120 PSF	90 PSF	75 PSF	70 PSF	65 PSF
CANADA	<b>WIND PRESSURE*</b>	2.30 kPa	1.45 kPa	0.96 kPa	0.71 kPa	0.54 kPa	0.43 kPa
	<b>SNOW PRESSURE*</b>	6.69 kPa	5.36 kPa	4.42 kPa	3.88 kPa	3.46 kPa	3.21 kPa

### COVER OPTIONS†

**COLOR WEIGHT**  
 \* **Heavy Duty:** 14.5 oz. Gray, Green, Tan, White  
 \* **Ultra Duty:** 21.5 oz. Hunter Green, White



† All fabric weight calculations are in oz. per m².  
 \* Fire rated FR fabric CPAI 84 Section 6 and NFPA 701 compliant.

### WARRANTY INFO

	Cover	Back panel/door	Frame
<b>Heavy Duty</b>	10 years Prorated	3 years Prorated	3 years Prorated
<b>Ultra Duty</b>	15 years Prorated	3 years Prorated	3 years Prorated