

GEBERIT ALPHA CISTERNS

NEW ARRAYOF FUNCTIONS

The range of the Geberit Alpha cisterns has been improved and the application fields widened:

- Top and front actuation
- Two installation heights possible
- Water connection in two positions possible: at the back or at the side
- Easier maintenance accessibility



PREMIUM QUALITY

The sustainably produced and long-lasting products are highly durable and leak-proof. Geberit's cisterns and actuators stand for premium quality.



EASY TO CLEAN

A wall-hung toilet ensures easy and efficient cleaning and makes your bathroom more hygienic.



FULLY EQUIPPED

The Geberit Alpha cisterns are equipped with a high-end flush valve and a. No need to buy extras. Brackets for the inwall installation are also included.



SPARE PARTS AVAILABILITY

The availability of functional spare parts is guaranteed for 25 years, providing long-term operational safety.



WATER SAVING BY DUAL FLUSH TECHNOLOGY

The reliable components inside the cistern allow you to adjust the flush volume for two amounts of water. The big flush can be easily adjusted from 6 to 4.5 litres, the small flush volume is 3 litres.



TOP OR FRONT ACTUATION

For low-height situations Geberit Alpha cisterns offer the possibility to choose a top or front actuation.



CONSTRUCTION WITHSTANDS WEIGHTS OF 400 KG


There is no risk of the wall-hung toilet coming away from the wall as the construction is tested to bear a weight of 400 kg.



CLEAR DESIGN IN FRONT OF THE WALL

The Geberit Alpha actuator plates are all offering dual flush technology. The classic variety of colours and forms is lean and making sure that there is an actuator plate for every bathroom.



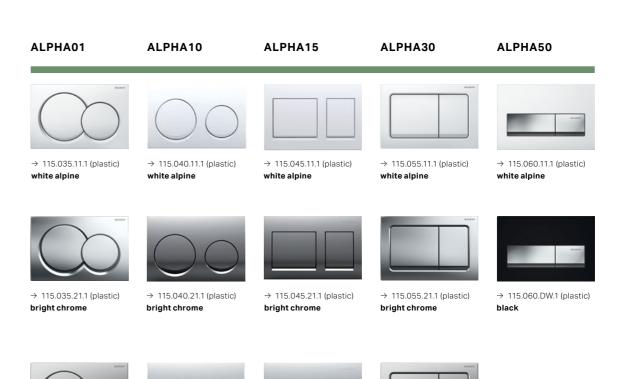

→ 115.045.46.1 (plastic)

matt chrome

→ 115.055.46.1 (plastic)

matt chrome

FEATURES

matt chrome

- Dual flush
- 213 mm x 142 mm

→ 115.035.46.1 (plastic)

→ 115.040.46.1 (plastic)

matt chrome










INSTALLATION OPTIONS


GEBERIT KOMBIFIX: SOLID WALL INSTALLATION






Geberit Kombifix installation elements are exclusively suitable for solid construction. They must be fastened in front of or inside a solid wall and then subsequently brick lined.


GEBERIT DUOFIX: DRYWALL INSTALLATION






Geberit Duofix installation elements are suitable for all drywall construction situations with a drywall system. It is possible to create complete room-height prewalls or partition walls.

STANDARD HEIGHT WITH FRONT ACTUATION










LOW HEIGHT WITH TOP OR FRONT ACTUATION







CONCEALED CISTERNS OVERVIEW

GEBERIT ALPHA

AT ONE GLANCE





















Article number	458.233.00.1	458.212.00.1	110.233.00.1 110.231.00.1*	110.212.00.1	110.175.00.1 110.174.00.1*	109.233.00.1**	109.212.00.1	109.175.00.1**
Cistern thickness***	12 cm	12 cm	12 cm	12 cm	8 cm	12 cm	12 cm	8 cm
Cistern height	112 cm	82 cm	106 cm	82 cm	109 cm	110 cm	82 cm	110 cm
For solid construction	х	х	х	х	х	x	x	x
For drywall construction	х	х						
Wall-hung-ready (fixation for wall-hung ceramic included)	х	Х	х	х	Х			
For top and front actuation		х		x			x	


Dimensione




















10

^{*} With leg supports

^{*} Can be cut to lengtl

^{***} Cistern thickness does not equal installation depth. Depending on the installation the depth is varying.

Geberit International Sales AG CH-8640 Rapperswil Switzerland

sales@geberit.com

www.international.geberit.com