



Jax Leum[®]

Single Coat Oil-Based Wood Stain
Protects, nourishes and colours wood in one easy application

CATALOGUE



CATALOGUE

CONTENTS

1. Our Range	1
a. Jax Oleum	2
b. Jax Oleum Maintenance Oil	2
c. Jax Oleum Deck Oil	3
d. Jax Varnish	3
e. Jax Cleaner and Jax Soft Wax	4
f. Jax Touch Up Paint Markers	4
g. Jax Gilders Paste	5
h. Jax Accessories	5
2. Colour Charts and Lists	6
i. Jax Oleum Colour Charts	6
j. Jax Oleum Deck Oil Colour Charts	7
k. Jax Oleum Colour Lists	8
3. Application Instructions	8
l. Jax Oleum	8
m. Jax Oleum Deck Oil	9
n. Jax Oleum 2K Matt Varnish	9



Our Range

We love wood! That is why we've committed years of research into a new product that we're particularly proud of - Jax Oleum.

Whether it's kept in its natural state or treated with colour, all wood needs to be nourished and protected.

Jax Oleum is incredibly effective and highly durable. Just 1 litre covers 50m², and takes only one coat to nourish, colour and help protect your wood against water, heat and sunlight. It is simple to apply – evenly sand and clean your natural wood and apply the oil using a cloth. After a few minutes the oil will have penetrated into the upper layers of the wood and then wipe away the excess.

It can be used inside & outside for furniture, engineered and solid wood flooring, doors and window frames, cladding, etc., as well as all veneers.

In one application you can change the colour of any absorbent natural wood product to a colour that will enhance the grain and transform the look. We have over 70 colours to choose from or you can mix existing colours to create your own. We can also match and make up other colours on request, with a minimum order quantity.

Treat your wood and increase its lifespan by applying our maintenance oil when needed.

Jax Oleum is proudly manufactured in South Africa.



Jax Oleum

Jax Oleum

Whether it's kept in its natural state or treated with colour, all wood needs to be nourished and protected.

Jax Oleum is incredibly effective and highly durable. Just 1 litre covers up to 50m², and takes only one coat to colour and help protect your wood against water, heat and sunlight. It is simple to apply – You just need to sand down and clean your natural wood and then apply the Oleum using a cloth. After a few minutes the Oleum will have penetrated into the upper layers of the wood and then you simply wipe away the excess.

In one application you can change the colour of any absorbent natural wood product to a colour that will enhance the grain and transform the look.



Jax Oleum Maintenance Oil

In order to increase the lifespan and further protect the wood an annual application of our maintenance oil is suggested. Apply the maintenance oil with a cloth to a clean and dry surface. Wipe off any excess oil and allow to dry.

The maintenance oil colour option to use is based on the shade of wood you're applying it to.

- Maintenance Oil, for wood already treated with one of the Jax Oleum darker shades.
- Maintenance White, for wood already treated with Jax Oleum White or a light-coloured wood to keep it light in colour and protected.
- Maintenance Grey, for wood already treated with one of the Jax Oleum light grey colours like cloud grey
- Maintenance Brown, for wood already treated with one of the Jax Oleum shades of brown colours like putty.



Jax Varnish

Jax Oleum Deck Oil

It is the latest Urethane modified oil technology providing optimum protection on hard and soft wood. The reactive urethane groups in the resin react with the lignin in the timber and together with the light fast pigments, retard the degradation process.

1 litre can cover 20 to 40 square meters, depending on the type of wood and the absorption rate of it.

The 2K matt water based interior varnish is good for protecting an already oiled surface, it will add durability and increase the water resistance of the surface it is applied to. It is especially good for bar counters, restaurant table tops, engineered flooring exposed to large volumes of traffic, etc.

It is a 2 part varnish – 900ml of base and 100ml hardener – that must only be mixed together when your surface is fully prepared and ready to be sealed as it does start to harden once mixed.

An oiled surface should be left to dry for at least 24 hours before the varnish is applied.

Once mixed apply onto a dry, dust free surface using a short mohair roller or cloth. Leave to dry for a few hours & lightly sand and clean the surface before the 2nd coat. A 3rd coat can be applied for heavy wear areas.

Allow to dry for 48 hours before using the item/walking on the surface that have been varnished.



Jax Cleaner

The cleaner has been formulated as a general purpose cleaner for any oiled wooden surface, the wax cleaner is more specific for wooden flooring, it will clean away any dirt and help protect the wood at the same time.

The Wax cleaner is to be used on solid wooden flooring, engineered wood, parquet flooring, etc.

Instructions for wax cleaner:

First vacuum the floor to remove excess dirt. We recommend to clean the floor once a week with the wax cleaner.

Use a 2-bucket system (1 bucket with cleaning solution, and the second with just clean water), and work in smaller areas of about 10m².

Dunk the mop in the 1st bucket of cleaning solution, and squeeze as much water as possible before mopping the floor. Rinse the mop in the 2nd bucket of clean water, squeeze out excess water and re-mop the surface to remove any cleaner left on the surface.

Rinse the mop again, squeeze out excess water and repeat the steps above working your way over the entire surface of the floor.

Instructions for general cleaner:

The General cleaner can be used on wooden table, wooden chairs, wooden doors and frames, etc.

Spray an appropriate amount of the cleaner on the surface or item you wish to clean and gently wipe the surface to clean it. For tough, dirty marks use the cleaning solution in its concentrated form and not diluted.

The general cleaner is available in a 1l bottle of concentrated cleaner or in a 750ml spray bottle of the diluted solution.

Dilute 100 ml to 5 Litres of water of the concentrated solution.



Jax Soft Wax

The soft wax adds protection to the item it has been applied to, and gives it a slight shine. It can be used on wooden flooring, furniture, doors etc as well as painted walls & furniture for technique effects.

Instructions:

Apply the wax with a soft cloth to the dry oiled surface, leave for a few minutes then buff.



Jax Touch Up Paint Markers

Touch Up paint markers are ideal for touching up little nicks or marks left on furniture, flooring, door frames, etc. They can be used for filling gaps, holes in joints and hiding imperfections in the wood.



Jax Gilder's Paste

Our gilders paste is ideal for permanent paint technique effect on art frames, furniture, steel and all other home decor and craft projects. Apply with a brush or soft cloth, use turps to thin and clean.

1kg tins are available on request with a delivery time of approx. 2 weeks. 20g tins and 95g tins are available in the online shop.



-  White
-  Black
-  Cream
-  Rust
-  Sandalwood

-  German Silver
-  Silver
-  Gold
-  Inca Gold
-  Rich Gold
-  Antique Gold
-  Bronze
-  Celtic Bronze
-  Foundry Bronze
-  African Bronze
-  Copper
-  Verdigris
-  Slate
-  Iris Blue
-  Patina
-  Violet
-  Coral Red
-  Tulip Red
-  Pinotage
-  Damson
-  Orange
-  Apricot
-  Canary Yellow

Jax Accessories

Applicator Handle Round



Sanding Disks Grit 80 - 240



Applicator Handle Rectangle



Applicator Pad Rectangle


Applicator Pads Round



Jax Wipes



We stock a range of accessories that work well with our products and make for an easy and simple application of our range. They have been tried and tested by our team of technicians and will allow you to prep your surfaces and apply the product correctly.

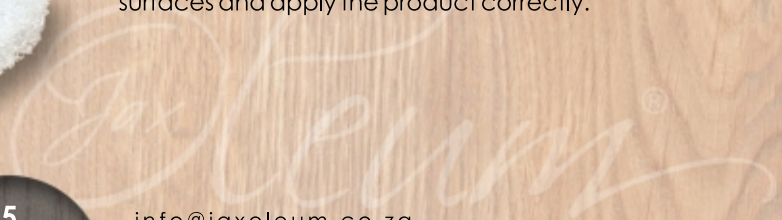

Jax Oleum Colour Charts



Light Oak	Dark Oak	Dark Silver	Olive
Java	Dark Java	Green	Blue
Mahogany	Dark Mahogany	Purple	Red
Extra Dark Mahogany	Old Teak	Chestnut	Cherry
Walnut	Brown	Pink	Orange
Champagne	Silver	Yellow	

ACTUAL PRODUCT COLOUR INDICATION ON WHITE OAK

COLOURS WILL VARY ON TYPE/BATCH OF WOOD

We love wood! That is why we have committed years of research into a product we are particularly proud of – Jax Oleum. Whether it's kept in its natural state or treated with colour, all wood needs to be nourished and protected. Jax Oleum is incredibly effective and durable. Just 1 litre covers up to 50m². It takes only one coat to colour and help protect your wood against water, heat and sunlight. It is simple to apply – You just need to sand down and clean your natural wood and then apply the oil using a cloth. After a few minutes the oil will have penetrated into the upper layers of the wood and then you simply wipe away the excess. It can be used on all solid wood, veneers and plywood - furniture, doors, window frames, flooring, etc. for both indoor & outdoor use. In one application you can change the colour of any absorbent natural wood product to a colour that will enhance the grain and transform the look. We have over 50 colours to choose from or you can mix existing colours to create your own. We can also match and make up other colours on request, with a minimum order quantity. Treat your wood and increase its lifespan by applying our maintenance oil when needed. For high traffic areas and where there is liquid exposure and possible staining it is recommended to overcoat with our 2K Matt Varnish for extra protection. Other varnishes can also be used. **Protects, nourishes and colours wood in one easy application.** **Great coverage up to 50m² per litre**

- Easy to apply with one single coat
- Can be used on all natural uncoated wood for both interior and exterior applications
- Low VOC's
- Non-toxic when dry
- First test the Oleum colour on the wood being treated

Recommended products to use with and after treatment:

- Jax Maintenance Oil:** Nourishes and protects wood
- Jax Soft Wax:** Protects wood and gives it a slight shine
- Jax Revell Slip Paint Mortar:** Fills and repairs chips and cracks
- Jax Cleaners:** For cleaning oil oiled wooden surfaces
- Jax Varnish:** Water based 2K matt varnish
- Jax Wipes & Accessories:** Used for applying the Jax Oleum

Proudly manufactured in South Africa by

JAX WAX

Jax Classics 44
P.O. Box 1519 Winelands, 2054
Johannesburg, South Africa

www.jaxoleum.co.za Tel + 27 11 444 7221
info@jaxoleum.co.za Fax 085 652 0194



Single Coat Oil-Based Wood Stain

Protects, nourishes and colours wood in one easy application

Colour Chart

Untreated White Oak	Bare	Wheat	Dark Wheat	Sofa Sky	Light Grey	Dark Gunmetal	Extra Dark Gunmetal
Clear	Natural	Bone	Corn Silk	Dark Sky	Grey	Storm Grey	Blue Grey
Maintenance Oil	Maintenance Oil White	Putty	Sand	Smoke	Cloud Grey	Dark Blue Grey	Studio Grey
Maintenance Oil Grey	Ghost White	Dark Sand	Silver Wash	Dark Cloud	Gunmetal	Dark Smoke	Sofa Grey
White	Extra White	Dark Silver Wash	Sky Grey	Black	Extra Black	Sofa Storm	Dark Grey
Extra Extra White	Pale Wheat	Mist Grey	Dark Mist	Extra Extra Black	Ebony	Castle Grey	Pecon

ACTUAL PRODUCT COLOUR INDICATION ON WHITE OAK

COLOURS WILL VARY ON TYPE/BATCH OF WOOD

ACTUAL PRODUCT COLOUR INDICATION ON WHITE OAK

COLOURS WILL VARY ON TYPE/BATCH OF WOOD

Jax Oleum Deck Oil Colour Charts



We love wood! That is why we have committed years of research into a product we are particularly proud of – Jax Oleum Urethane Deck Oil

Whether it's kept in its natural state or treated with colour, all wood needs to be nourished and protected.

Our urethane modified deck oil technology provides an incredibly effective and durable coating, retarding the degeneration of the cellulose cells in the timber, while at the same time leaving a natural look and prolonging the lifespan.

Just 1 litre covers 20 to 40m² depending on the wood type. It takes only one coat to colour and protect your wood. It is simple to apply – You just need to sand down and clean your natural wood and then apply the oil using a cloth, a fine pile roller, brush or buffing machine. A second coat to be applied after three months & a maintenance coat annually. It can be used on all solid wood decking - furniture, doors, window frames, flooring, etc.

Protects, nourishes and colours wood in one easy application.

Great coverage up to 40m² per litre

- Easy to apply with one single coat
- Can be used on all natural uncoated wood for both interior & exterior applications
- Low Vac's and Non-toxic when dry
- First test the Oleum Deck Oil colour on the wood being treated

Recommended products to use with and after treatment.

Jax Maintenance Oil:

Nourishes and protects wood

Jax Soft Wax:

Protects wood and gives it a slight shine

Jax Touch Up Paint Markers:

Fills and repairs chips and cracks

Jax Cleaners:

For cleaning all oiled wooden surfaces

Jax Varnish:

Water based interior 2K matt varnish

Jax Wipes & Accessories:

Used for applying the Jax Oleum



Urethane Deck Oil

Protects, nourishes and colours wood in one easy application

Colour Chart

Proudly manufactured in South Africa by



Jax Classics cc
P.O. Box 1519 Kelvin, 2004
Johannesburg, South Africa
www.jaxoleum.co.za
info@jaxoleum.co.za

Tel + 27 11 444 7221
Fax + 27 11 444 7210



NATURAL



WHITE



BONE



WEATHERED



LIGHT GREY



SMOKE



DARK OAK



DARK GUNMETAL



MAHOGANY



DARK MAHOGANY



BLACK



EXTRA BLACK

Jax Oleum – Urethane Deck Oil

It is the latest urethane modified oil technology providing optimum protection on hard and soft wood. The reactive urethane groups in the resin react with the lignin in the timber and together with the light fast pigments, retard the degeneration process.

Instructions

1. Sand the wood down to a smooth finish making sure all previous coatings are removed.
2. Use a damp cloth to remove all dust, ensure the surface is dry before application.
3. Shake the tin well and apply the oil with a fine pile roller, brush, soft cloth or a buffing machine.
4. Allow to soak in and dry for around 15 minutes.
5. Remove excess with a cloth or buffing machine.
6. Cure time is around 6 hours for light traffic, with no water based cleaning for 14 days.
7. Re-apply another coat 3 to 6 months after the 1st coat & then re-apply annually.
8. Soak cloths in water after use to prevent their spontaneous combustion.

1 litre covers 20 to 40 m², depending on the type and absorption rate of the wood.

ACTUAL PRODUCT COLOUR ON OKOLIME

Jax Oleum

- | | |
|-------------------------|-----------------|
| 1. Bare | 37. Ghost White |
| 2. Black | 38. Green |
| 3. Blue | 39. Grey |
| 4. Blue Grey | 40. Gunmetal |
| 5. Bone | 41. Java |
| 6. Brown | 42. Light Grey |
| 7. Castle Grey | 43. Light Oak |
| 8. Champagne | 44. Mahogany |
| 9. Cherry | 45. Mink |
| 10. Chestnut | 46. Mist Grey |
| 11. Clear | 47. Natural |
| 12. Cloud Grey | 48. Old Teak |
| 13. Corn Silk | 49. Olive |
| 14. Cumin | 50. Orange |
| 15. Dark Blue Grey | 51. Pale Wheat |
| 16. Dark Brown | 52. Pecan |
| 17. Dark Cloud | 53. Pink |
| 18. Dark Grey | 54. Purple |
| 19. Dark Gunmetal | 55. Putty |
| 20. Dark Java | 56. Red |
| 21. Dark Mahogany | 57. Sage |
| 22. Dark Mist | 58. Sand |
| 23. Dark Oak | 59. Silver |
| 24. Dark Sand | 60. Silver Wash |
| 25. Dark Silver | 61. Sky Grey |
| 26. Dark Silver Wash | 62. Smoke |
| 27. Dark Sky | 63. Sofa Grey |
| 28. Dark Smoke | 64. Sofa Sky |
| 29. Dark Wheat | 65. Sofa Storm |
| 30. Ebony | 66. Storm Grey |
| 31. Extra Black | 67. Studio Grey |
| 32. Extra Dark Gunmetal | 68. Walnut |
| 33. Extra Dark Mahogany | 69. Wheat |
| 34. Extra Extra Black | 70. White |
| 35. Extra Extra White | 71. Yellow |
| 36. Extra White | |

Jax Oleum Deck Oil

- | | |
|------------------|---------------|
| 1. Black | 7. Light Grey |
| 2. Bone | 8. Mahogany |
| 3. Dark Gunmetal | 9. Natural |
| 4. Dark Mahogany | 10. Smoke |
| 5. Dark Oak | 11. Weathered |
| 6. Extra Black | 12. White |

Jax Oleum Maintenance Oil

1. Maintenance Oil
2. Maintenance Oil Brown
3. Maintenance Oil Grey
4. Maintenance Oil White

Application Instructions for Jax Oleum

1. Jax Oleum protects, nourishes and colours all natural, uncoated wood.
2. It is important to prepare the surface correctly as this will have an impact on the finish. If the wood has been previously coated, remove all varnish, paint, etc. and return the wood to its natural state.
3. Sand the wood down to a final finish. For softer wood use sandpaper with a higher grit rating, e.g. for pine use 150–180 grit, for oak use 120–150 grit, etc. All prepared surfaces should be sanded with the same grit rating for even colour absorption. For enhanced colour absorption, sand with a coarser grit paper, brushing the grain with a wire brush will enhance it even further.
4. Clean the surface with either a dry or damp cloth and allow to dry completely. Cleaning with a damp cloth enhances the finished colour of the oleum.
5. Shake the Jax Oleum tin very well to ensure the pigments are well mixed.
6. Apply Jax Oleum immediately after the surface has been sanded and cleaned. Use a clean cloth, or our white/maroon application pads to apply the Jax Oleum over the entire surface, rub it in well, let the Oleum penetrate for 5 to 10 minutes and then wipe away the excess. Coverage may range from 20 m² to over 50 m² per litre, depending on the type of wood and its preparation.
7. Using the maroon pad for application will give the wood a smoother finish as it simultaneously buffs the surface.
8. Keep in mind that Jax Oleum is a single coat application product. Once the Oleum is dry do not apply a second coat, it will not be absorbed and may cause the surface to have a shiny, tacky finish.
9. Before using the coated item, allow drying time of 12–24 hours, with full cure after 14 days. Do not clean with any liquid until after full cure.
10. Jax Maintenance Oil can be applied whenever the wooden surface is looking a little dry. It will nourish the wood and give it a slight sheen. Maintenance Oil cannot be applied on top of a varnished surface.
11. Jax Oleum can be overcoated with most varnishes, from matt to high gloss, with both water and solvent-based varnishes. Allow 24 hours drying time before applying any varnishes.

Varnishing creates a harder wearing and water-resistant surface, and also reduces maintenance.

Application Instructions

Instructions for Application on Solid Wood and Engineered Flooring

1. The flooring should be sanded with 100–120 grit sandpaper or with a 100-grit sanding mesh pad on a buffing machine.
2. Remove all dust from the sanded floor with a vacuum cleaner or pressure blower, then wipe the floor with a clean cloth or sweep with a soft broom.
3. The floor should be oiled immediately after cleaning.
4. Follow either Method 1 or 2 below:

Method 1

- Trowel oil liberally and leave to dry for ±15 minutes.
- Then buff with a heavy-duty buffing machine using a red pad until the oil starts to gel.
- Wipe off the excess oil with a cloth, and then buff the floor evenly with a white pad.

Method 2

- With a buffing machine: Pour the oil in the centre of a red pad on the floor, attach the buffing machine to the pad and then work the oil into the floor in 10m² sections, and allow to dry for ±15 minutes.
 - Wipe off the excess oil with a cloth, and then buff the floor evenly with a white pad.
5. Do not use the floor for at least 12–24 hours. Full cure takes 14 days and no liquid should be used on the floor during that time.

Maintenance Instructions for Flooring

1. Sweep or vacuum the floor daily and keep as dirt free as possible.
2. After the oil has fully cured ±14 days, use diluted Jax Wax Cleaner to clean the floor with a damp (not wet) micro fibre mop. Avoid using too much water as this may eventually damage the floor.
3. Apply Jax Maintenance Oil annually or when the wood is looking a little dry, provided a varnish has not been applied.
4. Do not leave liquid spills for any extended time on oiled floors.
5. For high-traffic flooring and to reduce maintenance, apply 2K Matt Varnish 24 hours after oiling. A minimum of 2 coats are required, but 3 to 4 coats are recommended for high traffic areas.

Jax Oleum Deck Oil Application Instructions

1. Sand the wood down to a smooth finish making sure all previous coatings are removed.
2. Use a damp cloth to remove all dust, ensure the surface is dry before application.
3. Shake the tin well and apply the oil with a fine pile roller, brush, soft cloth or a buffing machine.
4. Allow to soak in and dry for around 15 minutes.
5. Remove excess with a cloth or buffing machine.
6. Cure time is around 6 hours for light traffic, with no water based cleaning for 14 days.
7. Re-apply another coat 3 to 6 months after the first coat & then re-apply annually.
8. Soak cloths in water after use to prevent their spontaneous combustion.

Application Instructions for Jax Oleum 2K Matt Varnish

1. Once the surface is ready to varnish, mix the required amount in a ratio of 100 ml varnish to 11 ml of hardener. Once mixed, the pot life is between 8–10 hours.
2. Apply evenly onto a dust-free surface using a short mohair roller or cloth.
3. Leave to dry for 2–3 hours, lightly sand with a ± 200-grit sandpaper or buff with a red pad, wipe clean and apply a 2nd coat. Once dry, apply a 3rd or 4th coat for high-traffic areas.
4. For newly oiled surfaces, wait at least 24 hours before applying the varnish. Applying varnish to a surface seals it. If the surface is later damaged and Jax Oleum needs to be reapplied, the wooden surface will need to be sanded down to its original state and prepared again.
5. Full cure is 36 hours. Coverage is ± 20 m² per litre per coat.

General Cleaning and Maintenance of Wooden Surfaces Treated with Jax Oleum

Do's

- Use a soft, damp cloth with diluted Jax Cleaner to gently clean oiled surfaces.
- Plush furniture cream works well for cleaning and adding a slight lustre.
- Use Jax Maintenance Oil annually or when the surface is a little dry. It will nourish the wood and give it a slight sheen.

Don't's

- Do not use any solvents to clean the wood (thinners, turpentine, benzene, etc.)
- Do not use any harsh detergents (ammonia-based products, dishwashing liquid, etc.)
- Do not rub the surface with excessive pressure or an abrasive material.
- Do not leave liquids for long periods on the surface as they may leave a watermark.

Tips and Tricks

- Spills should be wiped off as soon as possible. Jax Cleaner is recommended to try and remove spill stains.
- Jax Touch-up Markers or Brummer's Wood Filler mixed with Oleum is great for filling scratches and nicks.
- Always test a sample of the Jax Oleum colour on the wood being used. Different timbers and batches of timber affect the colour differently.
- If too much Jax Oleum has been applied and left to dry before the excess has been wiped off, leaving a shiny, tacky finish.

Follow this process:

- With the diluted Jax Cleaner and a maroon pad, buff all the excess coating off
- Wipe the surface with a clean cloth
- Allow to dry
- Apply another coat of Jax Oleum
- Wipe the excess off after a few minutes