

OAK

I T ' S H A R D W O O D

CATALOGUE

About Us

Introducing OAK by Stiles, a masterpiece of engineered hardwood that effortlessly infuses any space with an inviting, raw, and authentic ambiance. Immerse yourself in the captivating range of colours, with an extensive library of options and unique colour matching capabilities, allowing you to achieve your desired aesthetic. OAK goes beyond customisation, enabling you to handpick not only the colour, but also the pattern, size, texture, and grading of the hardwood, fulfilling your every design aspiration.


Each OAK product receives meticulous attention, consistently coated with 120gm of water-based LOBA finish. This modern, solvent-free finish boasts a fusion of natural raw materials, providing an unrivalled combination of environmental compatibility and outstanding properties. The LOBASOL® range is renowned for its high wear resistance, stain resistance, moisture and dirt repellence, and remarkable chemical resistance, making it the ultimate solution for even the most demanding applications.

For areas with high foot traffic, OAK offers the option of two-component water-based commercial coatings, delivering unmatched durability and performance.

Take your design to new heights with customised OAK staircases, seamlessly matching your flooring and offering tailored stair treads and other bespoke elements to complete the cohesive look and feel of your space.



European Vintage Oak Engineered Hardwood Flooring 2200x220mm

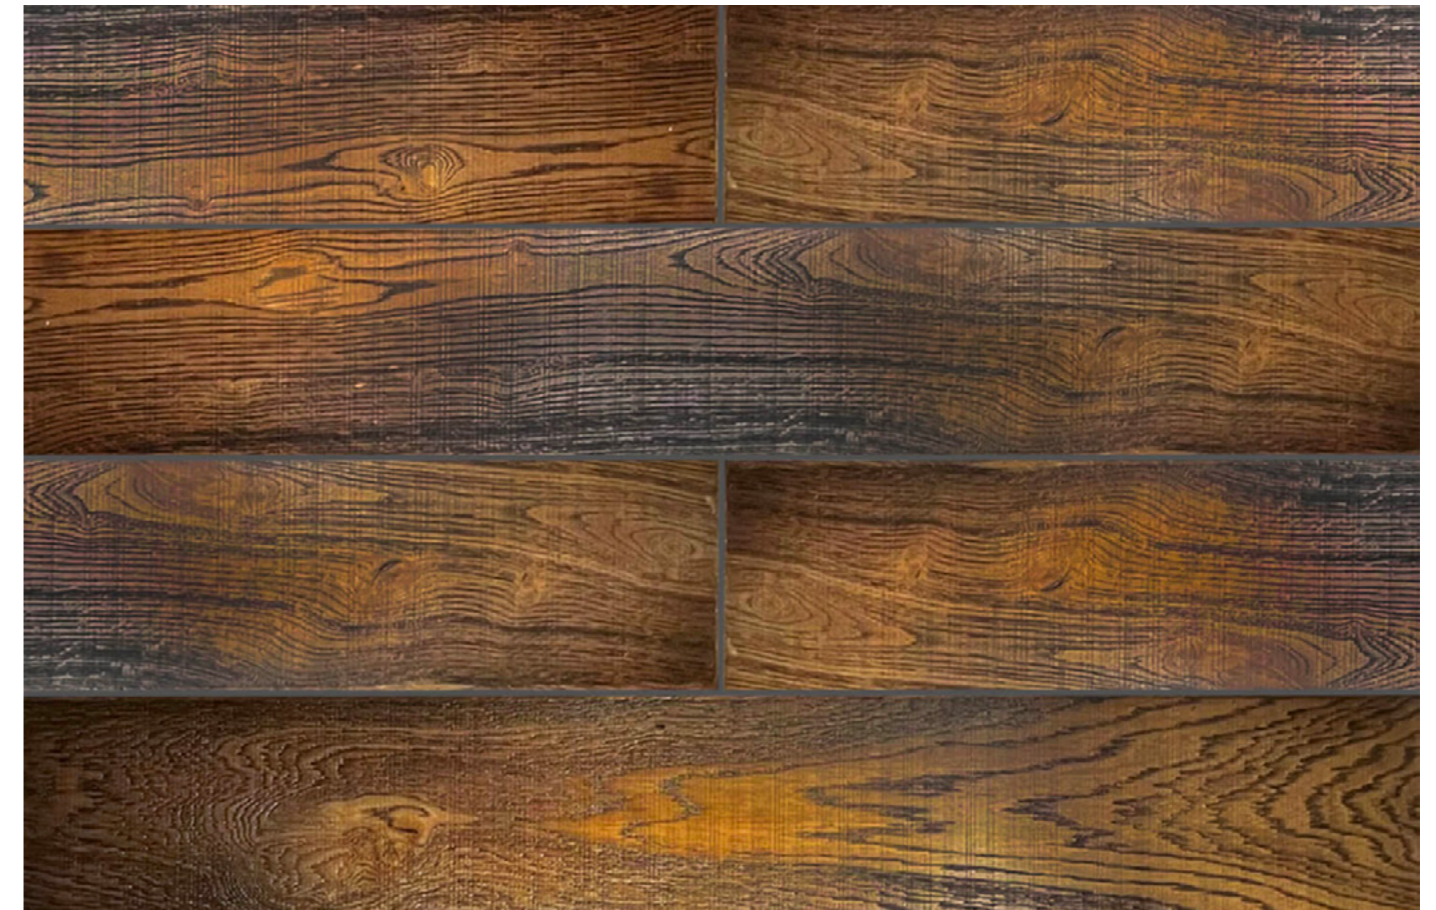

European Vintage Oak's multilayer engineered hardwood flooring is from their CDE Extra Rustic range. This 15mm thick indoor floorboard consists of a 11mm Birch multilayer base for excellent stability and a 4mm top layer of European Oak from PEFC certified timber. This grade of wood has large knots, large half-filled cracks filled with black filler in the boards and sap wood. With many stains to choose from, these Oak floorboards can be stained to match your existing floors and furniture. These engineered floorboards are compliant up to 27 °C for underfloor heating.

Brand:	Oak
Range/Collection:	CDE Extra Rustic
Wood type:	11mm Birch multilayer base, 4mm European oak top layer
Grading:	CDE Extra Rustic Grade
Sizes Available:	2200x220mm
Look:	Wood
Finish/Texture:	Natural
Application:	Floor tile
Thickness (mm):	15mm
Suitable Areas:	Indoor Areas
Installation:	Glue down (according to SAWLFA specification)
Recommended Adhesive:	Wakol MS 228 Adhesive
Country of manufacturer:	Germany
Extra info:	Use Wakol PU 280 moisture barrier in conjunction with adhesive when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content

Grand Oak Engineered Hardwood Flooring 2200x260mm



Grand Oak's multilayer engineered hardwood flooring is from their ABCD range. This 15mm thick indoor floorboard consists of a 11mm Birch multilayer base for excellent stability and a 4mm top layer of European Oak from PEFC certified timber. This grade of wood has knots and some white flashes of sap in each floorboard. With many stains to choose from, these Oak floorboards can be stained to match your existing floors and furniture. These engineered floorboards are compliant up to 27 °C for underfloor heating.

Brand:	Oak
Range/Collection:	ABCD
Wood type:	11mm Birch multilayer base, 4mm European oak top layer
Grading:	ABCD Grade
Sizes Available:	2200x260mm
Look:	Wood
Finish/Texture:	Natural
Application:	Floor tile
Thickness (mm):	15mm
Suitable Areas:	Indoor Areas
Installation:	Glue down (according to SAWLFA specification)
Recommended Adhesive:	Wakol MS 228 Adhesive
Country of manufacturer:	Germany
Extra info:	Use Wakol PU 280 moisture barrier in conjunction with adhesive when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content

Herringbone Rustic Oak Engineered Hardwood Flooring 600x150mm



Herringbone Rustic Oak's multilayer engineered hardwood flooring is from their ABCD Rustic range. This 15mm thick herringbone design floorboard consists of a 11mm Birch multilayer base for excellent stability and a 4mm top layer of European Oak from PEFC certified timber. This grade of wood has knots and some small filled cracks in the boards with less than 10% sap wood. With many stains to choose from, these Oak floorboards can be stained to match your existing floors and furniture. These engineered indoor floorboards are compliant up to 27 °C for underfloor heating..

Brand:	Oak
Range/Collection:	ABCD Rustic
Wood type:	11mm Birch multilayer base, 4mm European oak top layer
Grading:	ABCD Rustic Grade
Sizes Available:	600x150mm
Look:	Wood, Herringbone
Finish/Texture:	Natural
Application:	Floor tile
Thickness (mm):	15mm
Suitable Areas:	Suitable Areas: Indoor Areas
Installation:	Glue down (according to SAWLFA specification)
Recommended Adhesive:	Wakol MS 228 Adhesive
Country of manufacturer:	Germany
Extra info:	Use Wakol PU 280 moisture barrier in conjunction with adhesive when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content

Milieu Oak Engineered Hardwood Flooring 2200x220mm



Milieu Oak's multilayer engineered hardwood flooring is from their ABCD Select range. This 15mm thick indoor floorboard consists of a 11mm Birch multilayer base for excellent stability and a 4mm top layer of European Oak from PEFC certified timber. This grade of wood has knots and less than 5% sap wood. With many stains to choose from, these Oak floorboards can be stained to match your existing floors and furniture. These engineered floorboards are compliant up to 27 °C for underfloor heating.

Brand:	Oak
Range/Collection:	ABCD Select
Wood type:	11mm Birch multilayer base, 4mm European oak top layer
Grading:	ABCD Select Grade
Sizes Available:	2200x220mm
Look:	Wood
Finish/Texture:	Natural
Application:	Floor tile
Thickness (mm):	15mm
Suitable Areas:	Indoor Areas
Installation:	Glue down (according to SAWLFA specification)
Recommended Adhesive:	Wakol MS 228 Adhesive
Country of manufacturer:	Germany
Extra info:	Use Wakol PU 280 moisture barrier in conjunction with adhesive when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content



Mini Mosaic Oak Parquet Engineered Hardwood Flooring 640x320mm



Mini Mosaic Oak's parquet engineered hardwood flooring is from their Rustic range. This 8mm thick solid European Oak indoor floorboard has knots and cracks above 5mm and some sap wood. With many stains to choose from, these Oak floorboards can be stained to match your existing floors and furniture. These engineered floorboards are compliant up to 25°C for underfloor heating.

Brand:	Oak
Range/Collection:	Rustic
Wood type:	8mm European oak
Grading:	Rustic Grade
Sizes Available:	640x320mm
Look:	Wood, Parquet
Finish/Texture:	Natural
Application:	Floor tile
Thickness (mm):	8mm
Suitable Areas:	Indoor Areas
Installation:	Glue down (according to SAWLFA specification)
Recommended Adhesive:	Wakol MS 228 Adhesive
Country of manufacturer:	Germany
Extra info:	Use Wakol PU 280 moisture barrier in conjunction with adhesive when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content

Threelayer Entrée Oak Engineered Hardwood Flooring 1860x189mm



Threelayer Entrée Oak's engineered hardwood flooring is from their AB Rustic grade range. This 14mm thick floorboard consists of a 11mm three-layered base consisting of Pine and Poplar and a 3mm top layer of European Oak from PEFC certified timber. This grade of wood has knots and some small filled cracks in the boards and less than 10% sap wood. With many stains to choose from, these Oak floorboards can be stained to match your existing floors and furniture. These engineered floorboards are compliant up to 27 °C for underfloor heating and ideal for indoor floors.

Brand:	Oak
Range/Collection:	AB Rustic
Wood type:	11mm Pine and Poplar base, 3mm European oak top layer
Grading:	AB Rustic Grade
Sizes Available:	1860x189mm
Look:	Wood
Finish/Texture:	Natural
Application:	Floor tile
Thickness (mm):	14mm
Suitable Areas:	Indoor Areas
Installation:	Glue down (according to SAWLFA specification)
Recommended Adhesive:	Wakol MS 228 adhesive
Country of manufacturer:	Germany
Extra info:	Use Wakol PU 280 moisture barrier in conjunction with adhesive when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content

Available at Stiles
www.stiles.co.za

