


## OVERVIEW

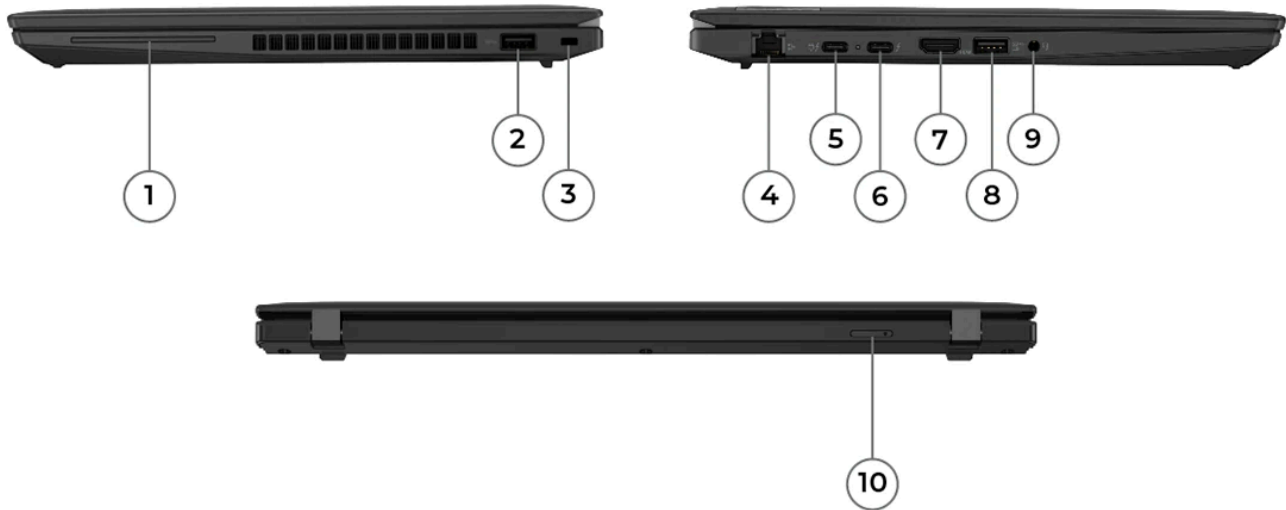

|                                  |                                              |
|----------------------------------|----------------------------------------------|
| 1. Smart card reader *           | 6. Thunderbolt 4                             |
| 2. USB 3.2 Gen 1                 | 7. HDMI                                      |
| 3. Kensington Nano Security Slot | 8. USB 3.2 Gen 1 (Always On)                 |
| 4. Ethernet (RJ-45)              | 9. Headphone / microphone combo jack (3.5mm) |
| 5. Thunderbolt 4                 | 10. Nano-SIM card slot *                     |

Notes:

- Ports with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

12th Generation Intel® Core™ i5 / i7 Processor

#### Processor\*\*<sup>[1]</sup>

| Processor Name | Cores                    | Threads | Base Frequency                | Max Frequency                 | Cache | Memory Support | Processor Graphics      |
|----------------|--------------------------|---------|-------------------------------|-------------------------------|-------|----------------|-------------------------|
| Core i5-1235U  | 10 (2 P-core + 8 E-core) | 12      | P-core 1.3GHz / E-core 0.9GHz | P-core 4.4GHz / E-core 3.3GHz | 12MB  | DDR4-3200      | Intel Iris® Xe Graphics |
| Core i5-1245U  | 10 (2 P-core + 8 E-core) | 12      | P-core 1.6GHz / E-core 1.2GHz | P-core 4.4GHz / E-core 3.3GHz | 12MB  | DDR4-3200      | Intel Iris Xe Graphics  |
| Core i7-1255U  | 10 (2 P-core + 8 E-core) | 12      | P-core 1.7GHz / E-core 1.2GHz | P-core 4.7GHz / E-core 3.5GHz | 12MB  | DDR4-3200      | Intel Iris Xe Graphics  |
| Core i7-1265U  | 10 (2 P-core + 8 E-core) | 12      | P-core 1.8GHz / E-core 1.3GHz | P-core 4.8GHz / E-core 3.6GHz | 12MB  | DDR4-3200      | Intel Iris Xe Graphics  |
| Core i5-1240P  | 12 (4 P-core + 8 E-core) | 16      | P-core 1.7GHz / E-core 1.2GHz | P-core 4.4GHz / E-core 3.3GHz | 12MB  | DDR4-3200      | Intel Iris Xe Graphics  |
| Core i5-1250P  | 12 (4 P-core + 8 E-core) | 16      | P-core 1.7GHz / E-core 1.2GHz | P-core 4.4GHz / E-core 3.3GHz | 12MB  | DDR4-3200      | Intel Iris Xe Graphics  |
| Core i7-1260P  | 12 (4 P-core + 8 E-core) | 16      | P-core 2.1GHz / E-core 1.5GHz | P-core 4.7GHz / E-core 3.4GHz | 18MB  | DDR4-3200      | Intel Iris Xe Graphics  |
| Core i7-1270P  | 12 (4 P-core + 8 E-core) | 16      | P-core 2.2GHz / E-core 1.6GHz | P-core 4.8GHz / E-core 3.5GHz | 18MB  | DDR4-3200      | Intel Iris Xe Graphics  |
| Core i7-1280P  | 14 (6 P-core + 8 E-core) | 20      | P-core 1.8GHz / E-core 1.3GHz | P-core 4.8GHz / E-core 3.6GHz | 24MB  | DDR4-3200      | Intel Iris Xe Graphics  |

#### Notes:

- i7-1280P is special bid only in EMEA.

### Operating System

#### Operating System\*\*

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Linux
- Ubuntu Linux
- No operating system

### Graphics

#### Graphics\*\*<sup>[1]</sup>

| Graphics               | Type       | Memory    | Key Features  |
|------------------------|------------|-----------|---------------|
| Intel Iris Xe Graphics | Integrated | Shared    | DirectX® 12.1 |
| NVIDIA® GeForce MX550  | Discrete   | 2GB GDDR6 | DirectX 12    |

#### Notes:

- Intel Iris Xe Graphics capability requires system to be configured with Intel Core i5 or i7 processor and dual-channel memory. On the system with Intel Core i5 or i7 processor and single-channel memory, Intel Iris Xe Graphics will function as Intel UHD graphics. NVIDIA GeForce RTX™ 2050 is NOT available in EMEA.

### Monitor Support

#### Monitor Support<sup>[1]</sup>

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ and HDMI®)

- Thunderbolt supports up to 5K@60Hz

# ThinkPad T14 Gen 3 (Intel)

- HDMI supports up to 4K@60Hz

Notes:

1. Refresh rates >60hz also supported, however max resolution will be limited.

## Chipset

### Chipset

Intel SoC (System on Chip) platform

## Memory

### Max Memory<sup>[1]</sup>

- Up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200
- Up to 48GB (16GB soldered + 32GB SO-DIMM) DDR4-3200

### Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

### Memory Type

DDR4-3200

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

### Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

### Storage Slot

One M.2 2280 PCIe® Gen 4x4 slot, supports M.2 2242/2280 SSD

### Storage Type<sup>\*\*</sup>

| Disk Type    | Interface                          | Offering            | Security |
|--------------|------------------------------------|---------------------|----------|
| M.2 2280 SSD | PCIe NVMe®, PCIe 3.0 x4            | 256GB / 512GB / 1TB | Opal2    |
| M.2 2280 SSD | PCIe NVMe, PCIe 4.0 x4 Performance | 512GB / 1TB / 2TB   | Opal2    |

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

## Removable Storage

### Optical

None

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

### Speakers

Stereo speakers, 2W x2, Dolby® Audio™

### Microphone<sup>[1]</sup>

- Dual array microphone, far-field, Dolby Voice
- No microphone

### Camera<sup>\*\*[2]</sup>

- HD 720p, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- IR & FHD 1080p hybrid, with privacy shutter, fixed focus

- No camera

---

**Notes:**

1. No microphone is for special bid only.
2. Only 720p and IR & 1080p hybrid are available in EMEA.

## Battery

### Battery\*\*<sup>[1]</sup>

- Integrated Li-Polymer 39.3Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter
- Integrated Li-Polymer 52.5Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

### Battery Life<sup>[2]</sup>

Configuration 1 (max battery life)

MobileMark® 2018: up to 10.0 hr with 791 performance score @200nits

MobileMark 25: up to 8.2 hr with 601 performance score @250nits

JEITA 2.0: up to 19.9 hr @150nits

Local video playback: up to 15.1 hr @150nits

Alternate configuration 2

MobileMark 2018: up to 9.4 hr with 930 performance score @200nits

MobileMark 25: up to 6.5 hr with 653 performance score @250nits

JEITA 2.0: up to 12.0 hr @150nits

Local video playback: up to 10.1 hr @150nits

Alternate configuration 3

MobileMark 2018: up to 7.4 hr with 1055 performance score @200nits

MobileMark 25: up to 4.8 hr with 712 performance score @250nits

JEITA 2.0: up to 11.0 hr @150nits

Local video playback: up to 9.1 hr @150nits

---

**Notes:**

1. 39.3Wh battery is ONLY available for the models with integrated graphics.
2. Configuration 1 (max battery life): WUXGA (non-touch), Intel i5-1240P, 8GB soldered, Win 11, 52.5Wh battery, best power efficiency power mode  
Alternate configuration 2: WUXGA (touch), Intel i5-1250P, 16GB (8GB soldered + 8GB SO-DIMM), Win 11, 52.5Wh battery, best power efficiency power mode  
Alternate configuration 3: WQUXGA (touch), Intel i7-1280P, 32GB (16GB soldered + 16GB SO-DIMM), NVIDIA GeForce MX550, Win 11, 52.5Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark 2018](#), [MobileMark 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to [Microsoft® link](#) for more information about the Windows Performance power slider.

## Power Adapter

### Power Adapter\*\*<sup>[1][2]</sup>

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

---

**Notes:**

1. AC adapter offerings depend on the country.
2. 45W USB-C AC adapter is ONLY available for the models with integrated graphics.  
45W USB-C AC adapter and 65W USB-C slim AC adapter are NOT available in EMEA.  
No power adapter is for special bid only.

## DESIGN

## Display

### Display\*\*<sup>[1][2]</sup>

| Size  | Resolution         | Touch             | Type | Brightness | Surface                      | Aspect Ratio | Contrast Ratio | Color Gamut | Viewing Angle | Key Features                                                                      |
|-------|--------------------|-------------------|------|------------|------------------------------|--------------|----------------|-------------|---------------|-----------------------------------------------------------------------------------|
| 14.0" | WUXGA (1920x1200)  | None              | IPS  | 300 nits   | Anti-glare                   | 16:10        | 700:1          | 45% NTSC    | 170°          | -                                                                                 |
| 14.0" | WUXGA (1920x1200)  | None              | IPS  | 400 nits   | Anti-glare                   | 16:10        | 800:1          | 100% sRGB   | 170°          | Low power, Eyesafe® Certified, ICC Template color calibration                     |
| 14.0" | WUXGA (1920x1200)  | On-cell touch     | IPS  | 300 nits   | Anti-glare                   | 16:10        | 700:1          | 45% NTSC    | 170°          | -                                                                                 |
| 14.0" | WUXGA (1920x1200)  | On-cell touch     | IPS  | 500 nits   | Anti-glare                   | 16:10        | 1000:1         | 100% sRGB   | 170°          | ThinkPad® Privacy Guard                                                           |
| 14.0" | 2.2K (2240x1400)   | None              | IPS  | 300 nits   | Anti-glare                   | 16:10        | 1500:1         | 100% sRGB   | 170°          | Eyesafe Certified                                                                 |
| 14.0" | WQUXGA (3840x2400) | Add On Film Touch | IPS  | 500 nits   | Anti-reflection, Anti-smudge | 16:10        | 1500:1         | 100% DCI-P3 | 170°          | Dolby Vision™, DisplayHDR™ 400, Eyesafe Certified, ICC Template color calibration |

### Color Calibration

- ICC Template color calibration
- No color calibration

### Touchscreen\*\*

- Add-on Film Touch, supports 10-point touch
- On-cell touch, supports 10-point touch
- Non-touch

### Notes:

1. California Electronic Waste Recycling Fee  
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>
2. 2.2K display is NOT available in EMEA.

## Input Device

### Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

### Keyboard Backlight<sup>[1]</sup>

- LED backlight
- Non-backlight

### UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 61 x 115 mm (2.40 x 4.53 inches)

### Notes:

1. Storm grey cover is ONLY available with backlit keyboard.

## Mechanical<sup>[1]</sup>

### Dimensions (WxDxH)

| Models                      | Dimensions                                            |
|-----------------------------|-------------------------------------------------------|
| Model with storm grey cover | 317.7 x 227.36 x 17.9 mm (12.51 x 8.95 x 0.70 inches) |
| Model with black cover      | 317.7 x 226.9 x 17.9 mm (12.51 x 8.93 x 0.70 inches)  |

### Weight

| Models                                             | Weight                         |
|----------------------------------------------------|--------------------------------|
| Models with storm grey cover and 39.3Wh battery    | Starting at 1.33 kg (2.93 lbs) |
| Models with storm grey cover and 52.5Wh battery    | Starting at 1.36 kg (3.0 lbs)  |
| Models with thunder black cover and 39.3Wh battery | Starting at 1.21 kg (2.65 lbs) |
| Models with thunder black cover and 52.5Wh battery | Starting at 1.32 kg (2.91 lbs) |

**Case Color\*\*<sup>[2]</sup>**

- Storm grey
- Thunder black

**Surface Treatment<sup>[3]</sup>**

- ISO 22196 compliant anti-microbial surface treatment (not including UltraNav, keyboard, display, and display bezel)
- Not anti-microbial surface treatment

**Case Material\*\***

- Model with storm grey cover: aluminium (top), PPS (bottom)
- Model with thunder black cover and integrated graphics: PC 50% GF + PC 20% CF (top), PPS (bottom)
- Model with thunder black cover and discrete graphics: PC 50% GF + PC 20% CF (top), aluminium (bottom)

**Notes:**

1. The system dimensions and weight vary depending on configurations.
2. Storm grey cover is ONLY available for the models with integrated graphics.  
Storm grey cover is NOT available in EMEA.
3. Anti-microbial surface treatment is NOT available for storm grey models.

## CONNECTIVITY

### Network

**Onboard Ethernet\*\***

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models), 1x RJ-45, supports Wake-on-LAN

**WLAN + Bluetooth®\*\*<sup>[1][2]</sup>**

- Intel Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- Qualcomm® NFA-725A Wi-Fi 6E, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2

**WWAN\*\*<sup>[3]</sup>**

- Wireless WAN upgradable to 4G (with antenna ready)
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card
- Quectel EM05-G, 4G LTE CAT4, M.2 card
- No support

**SIM Card**

- Gemalto eSIM
- No SIM card inbox

**NFC<sup>[4]</sup>**

- Near Field Communication
- No support

**Notes:**

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
2. Wi-Fi 6E full features might be limited by country level restrictions.  
Wi-Fi 6E only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.  
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.
3. Wireless WAN upgradable to 4G is ONLY available in EMEA.  
Fibocom L860-GL CAT16 is special bid only in EMEA.
4. NFC is NOT available for storm grey models.  
NFC is special bid only in EMEA.

### Ports<sup>[1]</sup>

**Standard Ports**

# ThinkPad T14 Gen 3 (Intel)

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI, up to 4K/60Hz
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)

## Optional Ports\*\*\*

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

## Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt 3/4: 40 Gbit/s

## Docking

### Docking

Various docking solutions supported via Thunderbolt / USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad T14 Gen 3 \(Intel\)](#)

## Monitor Cable

### Monitor Cable\*\*\*

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

## SECURITY & PRIVACY

## Security

### Security Chip

Discrete TPM 2.0, TCG certified

### Physical Locks

Kensington® Nano Security Slot, 2.5 x 6 mm

### Smart Card Reader<sup>[1]</sup>

- Smart card reader
- No smart card reader

### Fingerprint Reader<sup>[2]</sup>

- Touch style fingerprint reader on power button, match-on-chip
- No fingerprint reader

### BIOS Security

- Power-on password
- Supervisor password
- System management password
- NVMe password
- USB FIDO (Fast Identity Online) device integration
- Certificate based BIOS authentication
- Firmware Resiliency 3.0

### Other Security<sup>[3]</sup>

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert
- Human Presence Detection (software)
- Mirametrix Glance

- (Optional) RFID reader

---

**Notes:**

1. Smart card reader is mutually exclusive with RFID reader.
2. Fingerprint reader is standard on storm grey models and optional on thunder black models.
3. RFID reader is ONLY available with anti-microbial cover, NOT available on storm grey models, and mutually exclusive with smart card reader.

## MANAGEABILITY

### System Management

**System Management\*\*<sup>[1]</sup>**

- Intel vPro Enterprise
- Intel vPro Essentials
- Non-vPro

---

**Notes:**

1. Intel vPro offers a superset of DASH's defined capabilities.

## SERVICE

### Warranty

**Base Warranty\*\*<sup>[1]</sup>**

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service

---

**Notes:**

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

## ENVIRONMENTAL

### Sustainability

**Material**

97% PCC recycled plastic used in speaker enclosure  
97% PCC recycled plastic used in the 52.5Wh battery  
25-30% in the 39.3Wh  
95% PCC recycled plastic used in standard 65W adapter  
Low-temperature solder  
90% recycled and/or sustainable packaging

### Operating Environment

**Temperature<sup>[1]</sup>**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F ) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

**Humidity**

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

**Altitude**

Maximum altitude (without pressurization): 3048 m (10,000 ft)

---

**Notes:**

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).



## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories

- Lenovo USB-C to Ethernet Adapter
- None

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 9.0
- RoHS compliant

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

(Optional) Eyesafe Certified

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel