



Certificate of Zoning Compliance Application

Zoning Code Enforcement Division, 176 Park Avenue, Rutherford, NJ 07070 O-201.460.3010 F-201.460.3012 permit@rutherfordboronj.com

Applicant Information

CHECK ONE:

CERTIFICATE OF ZONING COMPLIANCE

TRANSFER OF TITLE CERTIFICATE (please see note)

NOTE:** Fee for certificate is **\$100**. Cash or check made to the Borough of Rutherford; **Transfer of Title Certificate** is for closing purposes only. No occupancy allowed. Letter from buyer's attorney or owner, notarized, stating reason for no occupancy. No occupancy can be made until all inspections have been performed and a final UCC Certificate of Occupancy ***OR Certificate of Zoning Compliance has been issued. Failure to comply will result in a fine of \$500 per week.

Current Owner's Name:

** Last*

** First*

** Street address of house being sold*

Apt/Unit#

Block

Lot

***Buyer(s) Full Name-as to be typed on Certificate:**

***Buyer's Phone number:**

** Last*

** First*

Name of person completing form:

Owner

Agent

***Who to call when certificate is ready:**

** Name*

** Phone*

Have you had a final CO from the Building Dept within the last 90 days? Yes No *If yes, attach a copy*

Are you aware of any open permits within the Township?

Yes No

Is buyer planning to live in home?

Yes

No

If not, what is buyer's mailing address?

Current Closing Date:

State Current Use (1 family, 2 family, condo, co-op)

State Proposed Use

Office Use Only

Block:

Lot:

Fee: **\$100**

Check#:

Cash

Initial:

Zoning Approval Signature

Disclaimer

*** Required Fields**

This certificate of Zoning Compliance is issued pursuant to the provisions of the Borough of Rutherford and is not a Certificate of Occupancy issued in accordance with the provisions of the Uniform Construction Code.

****CERTIFICATES WILL BE ISSUED NO SOONER THAN 24 HOURS AFTER PASSED INSPECTION****

Applicant Signature _____

Date: _____

Applicant Email _____

Borough of Rutherford
Building Department

Check List - Residential Certificate of Zoning Compliance

- 1.) **Outstanding Permits**- Open or Outstanding permits must have final inspections and be closed.
- 2.) **Pressure relief discharge PIPE**- The pipe is required on heating units and water heaters; it cannot be reduced to from (3/4 to 1/2 inch) Pipe & should discharge no more than 6 inches off the floor. Yes, a permit was needed to replace the water heater.
- 3.) **Sump Pumps** - No Sump pumps are to discharge to the sewer.
- 4.) **Garages attached or inside the house**- The fire resistive rating at time of construction must be maintained. All the holes that were made for repairs to plumbing or for electrical wiring must be properly patched. Any door leading to the dwelling must be equipped with a listed self-closing device capable of closing the door, i.e.; U.L. Listed closing devices.
- 5.) **Sidewalks, stairs, driveways and walkways**- Shall be kept in good state of repair and maintained free from hazardous conditions. Repairs are O.K. if tripping hazards are not created.
- 6.) **Clearances to Combustibles**- Provide required space around fuel burning appliances. Follow manufacturer requirements.
- 7.) **Street Numbers**- Numbers to your house should be visible in case of an emergency, numbers should have 1/2 inch stroke a minimum of 3 (three) inches in Height and must be visible from the street.
- 8.) **Accessory Structures**- Garages, fences, sheds and walls must be kept in good state of repair and maintained.
- 9.) **Roofs, leader pipe and water runoff**- The roof shall be sound, tight & not have defects that admit rain. The leader pipes should terminate at the ground & discharge the water away from your foundation & not into the neighbor's yard.

Commercial Certificate and Condominium/Co-op Certificate are subject to inspection by the Bureau of Fire Safety.

Borough of Rutherford

Building Department

Smoke Alarm Requirements for Certificate of Zoning Compliance Inspection

Basic Installation Requirements: Smoke alarms shall be UL Listed and are to always be installed in accordance with the manufacturer's installation instructions. Smoke alarms are not to be installed within 3' of a bathroom or kitchen door opening, or within 3' of the airflow path of a heating or air conditioning register. Smoke alarms are not to be installed within 3' of the end of ceiling fan blades. See diagram below for correct smoke alarm placement. Fire alarm/security systems shall have operating, testing, and maintenance instructions maintained on-site.


Basement Level: The basement smoke alarm is to be installed in the immediate vicinity of the stairway leading to the basement. The smoke alarm is to be installed on the floor joist in open joist construction (unfinished), or on the drywall ceiling or other interior finished ceiling material. The smoke alarm shall not be located in the stairway.

Living Area and/or First Floor: The first floor or living area smoke alarm is to be installed in the living room or other room located near the stairway leading to the floor above. The smoke alarm may be installed on the ceiling or wall (see diagram below) and is not to be located in the stairway or within 3' of the kitchen door or opening.

Bedroom Areas: The bedroom area smoke alarm is to be located in the hall or area outside of the bedrooms in the immediate vicinity of the bedroom doors. It is not to be installed within 3' of the bathroom door. See diagram below for placement options.

Attic Area: The attic area smoke alarm shall be located in the attic near the top of the stairs from the floor below. See diagram below for placement options. Smoke alarms are not required in unfinished/uninhabitable attics.

Smoke alarms shall be mounted on the ceiling at least 4" from the wall or on the wall with the top of the alarm not less than 4" and not more than 12" below the ceiling at its highest point. Smoke alarms are to never be installed within 3' of a kitchen or bathroom door, and never within 3' of the ends of ceiling fan blades. Source: NFPA 72 National Fire Alarm Code

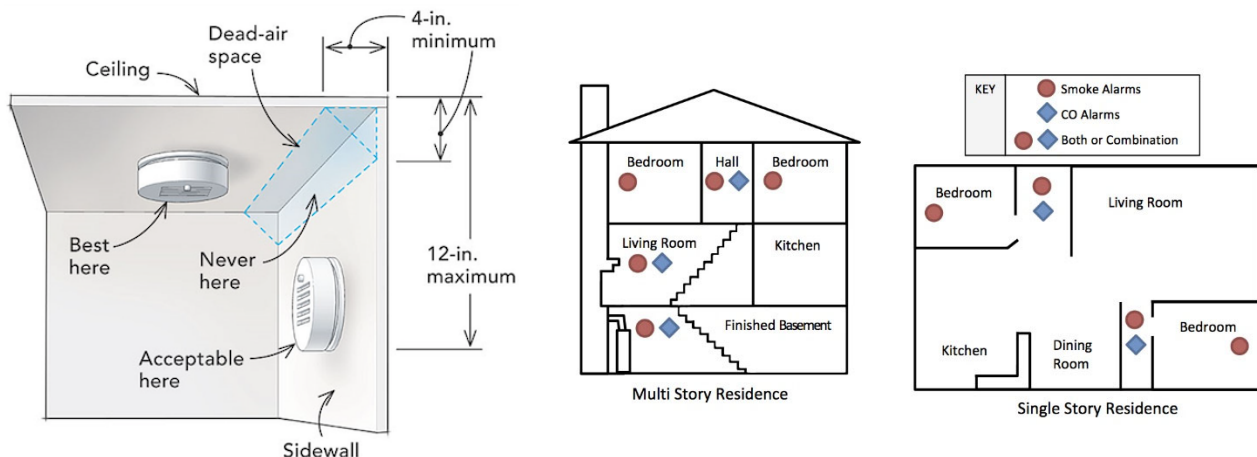

Borough of Rutherford

Building Department

Requirements for Dwelling Unit Fire Extinguisher

New Jersey P.L. 1991, c. 92 (C.52:27D-198.1), requires all one and two-family dwellings at a change of occupancy be provided with a portable fire extinguisher, in addition to the requirements for smoke and carbon monoxide detectors. This provision does not apply to seasonal rental units. This act was signed into law on April 14, 2005 with an effective date of November 1, 2005. The requirements for the type and placement of the extinguishers are as follows:

- 1.) At least one portable fire extinguisher shall be installed in all one and two family dwellings (except seasonal rental units) upon change of occupancy
- 2.) The extinguisher shall be listed, labeled, charged, and operable
- 3.) The size shall be no smaller than 2A:10B:C rated for residential use and weigh no more than 10 lbs
- 4.) The hangers or brackets supplied by the manufacturer must be used
- 5.) The extinguisher must be located within 10 feet of the kitchen
- 6.) The top of the extinguisher must not be more than 5 feet above the floor
- 7.) The extinguisher must be visible and in a readily accessible location, free from being blocked by furniture, storage, or other items
- 8.) The extinguisher must be near a room exit or travel path that provides an escape route to the exterior
- 9.) The extinguisher must be accompanied by an owner's manual or written information regarding the operation, inspection, and maintenance of the extinguisher
- 10.) The extinguisher must be installed with the operating instructions clearly visible

Requirements for Carbon Monoxide Detectors

New Jersey Uniform Fire Code NJAC 5:70-4.19 requires carbon monoxide detectors/alarms be installed and maintained outside of each separate sleeping area within each dwelling unit. A carbon monoxide alarm or detector should be located in the immediate vicinity outside of each separate sleeping area or bedroom(s). If more than one sleeping area is located on the same story or level additional carbon monoxide detectors/alarms may be required. Carbon monoxide detectors or alarms may be battery-operated, hard-wired or of the plug-in type, may be battery-operated, hard-wired or the plug-in type, may be ceiling or wall mounted in accordance with the manufacturer's instructions and shall be listed and labeled by UL and shall be installed in accordance with the above requirements and NFPA-720. Combination smoke/carbon monoxide alarms are acceptable. Carbon monoxide detectors are not required in buildings that do not contain a fuel-burning device or appliances or have an attached garage.