


Project Name

Qty

Type

Catalog / Part Number

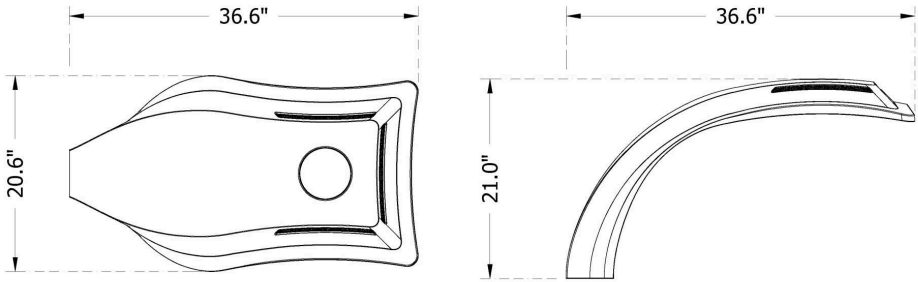

Certifications




Finish



CCT - Color Temp (K)



Distribution Type



Description

The Millenia™ ML740 large vertical tenon mount luminaire is a breakthrough in modern area lighting technology. Its new world urban design transcends traditional lighting convention by seamlessly interweaving form and function to yet another level. Available with a myriad of options, the Millenia™ is perfect for commercial, institutional and municipal markets.
EPA: 2.2 (ft²) | WEIGHT: 45 LBS

Features

Mounting Configuration	PT: Post Top
Fixture	ML740: Large Millenia Tenon Mount
Lens	CA: Clear Acrylic SV1: Flat SoftVue™ Light Diffused Acrylic SV2: Flat SoftVue™ Moderate Diffused Acrylic
Optional Pole Adapter	SQ4: Square pole adapter for 4" square pole shafts.
Optional Control Receptacle	R7: 7-Pin control receptacle only
Optional Control	PE: Twist-Lock Photocontrol (120V-277V) PE4: Twist-Lock Photocontrol (347V-480V) SC: Shorting Cap
Optional Fuse	FHD: Double Fuse and Holder
Optional House Side Shield	HSS: 120° House Side Shield BLOC: Back Light Optical Control
Optional Fixed Dimming Resistor Board	FDRB: Fixed Dimming Resistor Board

Finish	UGMT: Urban Gun Metal Textured UGM: Urban Gun Metal Matte UBT: Urban Bronze Textured UB: Urban Bronze Matte USLT: Urban Silver Textured USL: Urban Silver Matte UWHT: Urban White Textured UWH: Urban White Matte BKT: Black Textured CM: Custom Match
Light Source	
LED	40L: 40 LEDs 32L: 32 LEDs 24L: 24 LEDs
CCT - Color Temp (K)	27: 2,700K 30: 3,000K 35: 3,500K 40: 4,000K 50: 5,000K
Distribution Type	T2: Type 2 T3: Type 3 T4: Type 4 T5: Type 5
Driver	MDL018: 120V-277V,180mA MDH018: 347V-480V,180mA MDL016: 120V-277V,160mA MDH016: 347V-480V,160mA MDL014: 120V-277V,140mA MDH014: 347V-480V,140mA

How to Order

Mounting Configuration	Fixture	LED	CCT - Color Temp (K)	Distribution Type	Driver	Lens
PT Post Top	ML740 Large Millenia Tenon Mount	40L 40 LEDs 32L 32 LEDs 24L 24 LEDs	27 2,700K 30 3,000K 35 3,500K 40 4,000K 50 5,000K	T2 Type 2 T3 Type 3 T4 Type 4 T5 Type 5	MDL018 120V-277V, 180mA ⁽¹⁾ MDH018 347V-480V, 180mA ⁽¹⁾ MDL016 120V-277V, 160mA ⁽²⁾ MDH016 347V-480V, 160mA ⁽²⁾ MDL014 120V-277V, 140mA ⁽¹⁾ MDH014 347V-480V, 140mA ⁽¹⁾	CA Clear Acrylic SV1 Flat SoftVue™ Light Diffused Acrylic SV2 Flat SoftVue™ Moderate Diffused Acrylic

Notes:

1. 24L or 32L system only.

2. 40L system only.

How to Order

Optional Pole Adapter	Optional Control Receptacle ⁽³⁾	Optional Control	Optional Fuse	Optional House Side Shield ⁽⁵⁾	Optional Fixed Dimming Resistor Board ⁽⁶⁾	Finish
SQ4 Square pole adapter for 4" square pole shafts.	R7 7-Pin control receptacle only	PE Twist-Lock Photocontrol (120V-277V) ⁽⁴⁾ PE4 Twist-Lock Photocontrol (347V-480V) ⁽⁴⁾ SC Shorting Cap ⁽⁴⁾	FHD Double Fuse and Holder	HSS 120° House Side Shield BLOC Back Light Optical Control	FDRB Fixed Dimming Resistor Board	UGMT Urban Gun Metal Textured UGM Urban Gun Metal Matte UBT Urban Bronze Textured UB Urban Bronze Matte USLT Urban Silver Textured USL Urban Silver Matte UWHT Urban White Textured UWH Urban White Matte BKT Black Textured CM Custom Match ⁽⁷⁾

Notes:

3. Not for use with FDRB.
4. Requires control receptacle.
5. Not for use with T5 optic.
6. Not for use with R7.
7. Custom colors require upcharge.

Specifications


Fitter	The aluminum fitter Includes 4 stainless steel Allen-head set screws for attachment to a pole/tenon, and shall slip fit a 3" OD x 3" tall tenon.
Lens	Optional glare reducing SoftVue™ lens provides optimal visual comfort.
Serviceability	Tool-less access to the driver compartment for ease of installation and maintenance.
UL Listing	UL listed per UL1598 and CSA C22.2 No. 250.0 for the United States and Canada. Suitable for Wet Locations.
Electronic Driver	The LED driver is UL recognized and will be securely mounted inside the fixture, for optimized performance and longevity. It will be supplied with a quick-disconnect electrical connector on the power supply, providing easy power connections for fixture installation and maintenance. It will have DC voltage output and be a constant current design. It runs at 50/60HZ and will have overload, overheat, and short circuit protection. It will be supplied with a supplemental line-ground, line-neutral and neutral-ground electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines. It will be a high efficiency driver with a THD less than 20% and a high-power factor greater than .9. It will be dimming capable using a 0-10V signal, consult factory for more information.
NightSky® Friendly	Dark sky design properties with a U0 BUG rating for specific configurations.
Finish	Our 6 Stage Polyester Powder coat paint system offers a beautiful high-end finish that holds up to even the most extreme environments. Each part is inspected for quality and consistency before being released for shipment. Our system exceeds AAMA 2604, AAMA 2605, ASTM D523 and ASTM D4214 requirements.
Urban Finish	The Urban finish palette was created to highlight a modern, elegant aesthetic. All finishes are a 1 part powder coat with metallic flakes for a superior appearance. Finishes are available in textured or matte. Available finishes include: Black Textured, Urban Gun Metal, Urban Bronze, Urban Silver and Urban White
Warranty	7-year limited warranty. See Website for Terms and Conditions.
LEDs	The LEDs are mounted to maximize thermal transfer to the heat sink surface. The LEDs shall be 100% recyclable; not contain lead, mercury or any other hazardous substances and shall be RoHS compliant. Lumen maintenance shall be determined in accordance with IESNA TM-21, based on LED manufacturer LM-80 test data of no less than 6,000 hours and in-situ testing of the luminaire by an NVLAP accredited Energy Efficient Lighting Products lab. The high-performance white LEDs will have a predicted lumen depreciation of approximately 100,000 hours with greater than 70% of initial output at 25°C. The high brightness, high-output white LEDs shall be 4000K nominal (2700K, 3000K, 3500K or 5000K optional) correlated color temperature (CCT) with a 70 (minimum) color rendering index (CRI). Consult factory for custom CCT or CRI. The luminaire shall have a minimum _____ (see table) delivered initial lumens when operated at steady state with an average ambient temperature of 25°C (77°F). CCT Lumen Derate Values from 4,000K 2,700K (70+ CRI)=.92 3,000K (70+ CRI)=.95 3,500K (70+ CRI)=1.03 5,000K (70+ CRI)=1.00
Optics	The luminaire shall be provided with individual, refractor type optics applied to each LED. The luminaire shall provide Type ____ (2, 3, 4 or 5) light distribution per the IESNA classifications. Testing shall be done in accordance with IESNA LM-79.
Backlight Optical Control	BLOC Optic (BLOC): An optional "Back Light Optical Control" shield can be provided at the factory. This is an internal optic level "House Side Shield" offering significantly reduced backlight and glare while maintaining the original design aesthetics of the luminaire. External House Side Shield (HSS): An optional external 120° House Side Shield helps control backlight. Spun aluminum panel painted to match fixture.
Fixed Dimming Resistor Board (FDRB)	Optional numbered 10-step selector switch allows for fine adjustment of the light levels in the field, repeatable from location to location. Offers dimming from 25% to 100% of the original output. Enclosure is composite material, sealed to protect components for the life of the product.
Photocontrols	Twist-Lock Style (Roof Mount): The photocontrol shall be mounted on the roof and prewired to driver. The twist lock type photocontrol is instant on with a 3-6 second turn off, and shall turn on at 1.5 footcandles with a turnoff at 2-3 footcandles. Photocontrol is 120-277 volt.

Lumen Chart(s)

Tested with CA lens

Model #	T2 DELIVERED LUMENS	BUG	EFFICACY (LPW)	T3 DELIVERED LUMENS	BUG	EFFICACY (LPW)	T4 DELIVERED LUMENS	BUG	EFFICACY (LPW)	T5 DELIVERED LUMENS	BUG	EFFICACY (LPW)	WATTAGE
40L40T_-MDL016	20810	B3U0G3	118.9	20890	B3U0G3	119.4	20210	B3U0G3	115.5	21035	B4U0G2	120.2	175
40L30T_-MDL016	19840	B3U0G3	113.4	19920	B3U0G3	113.8	19270	B3U0G3	110.1	20055	B4U0G2	114.6	175
40L27T_-MDL016	17940	B3U0G3	102.5	18010	B3U0G3	102.9	17420	B3U0G3	99.5	18135	B4U0G2	103.6	175
32L40T_-MDL018	17910	B3U0G2	116.3	17955	B3U0G3	116.6	17370	B3U0G3	112.8	18130	B4U0G2	117.7	154
32L30T_-MDL018	17075	B3U0G2	110.9	17120	B3U0G3	111.2	16560	B3U0G3	107.5	17285	B4U0G2	112.2	154
32L27T_-MDL018	15440	B3U0G2	100.3	15480	B3U0G3	100.5	14975	B3U0G3	97.2	15630	B4U0G2	101.5	154
32L40T_-MDL014	14800	B2U0G2	126.5	14825	B3U0G3	126.7	14335	B2U0G2	122.5	14940	B3U0G2	127.7	117
32L30T_-MDL014	14110	B2U0G2	120.6	14135	B3U0G3	120.8	13670	B2U0G2	116.8	14245	B3U0G2	121.8	117
32L27T_-MDL014	12760	B2U0G2	109.1	12780	B3U0G3	109.2	12360	B2U0G2	105.6	12880	B3U0G2	110.1	117
24L40T_-MDL018	13690	B2U0G2	117.0	13710	B2U0G2	117.2	13295	B2U0G2	113.6	13835	B3U0G2	118.2	117
24L30T_-MDL018	13055	B2U0G2	111.6	13070	B2U0G2	111.7	12675	B2U0G2	108.3	13190	B3U0G2	112.7	117
24L27T_-MDL018	11800	B2U0G2	100.9	11820	B2U0G2	101.0	11460	B2U0G2	97.9	11925	B3U0G2	101.9	117
24L40T_-MDL014	11045	B2U0G2	125.5	11065	B2U0G2	125.7	10745	B2U0G2	122.1	11415	B3U0G1	129.7	88
24L30T_-MDL014	10530	B2U0G2	119.7	10550	B2U0G2	119.9	10245	B2U0G2	116.4	10885	B3U0G1	123.7	88
24L27T_-MDL014	9520	B2U0G2	108.2	9540	B2U0G2	108.4	9265	B2U0G2	105.3	9840	B3U0G1	111.8	88

Options

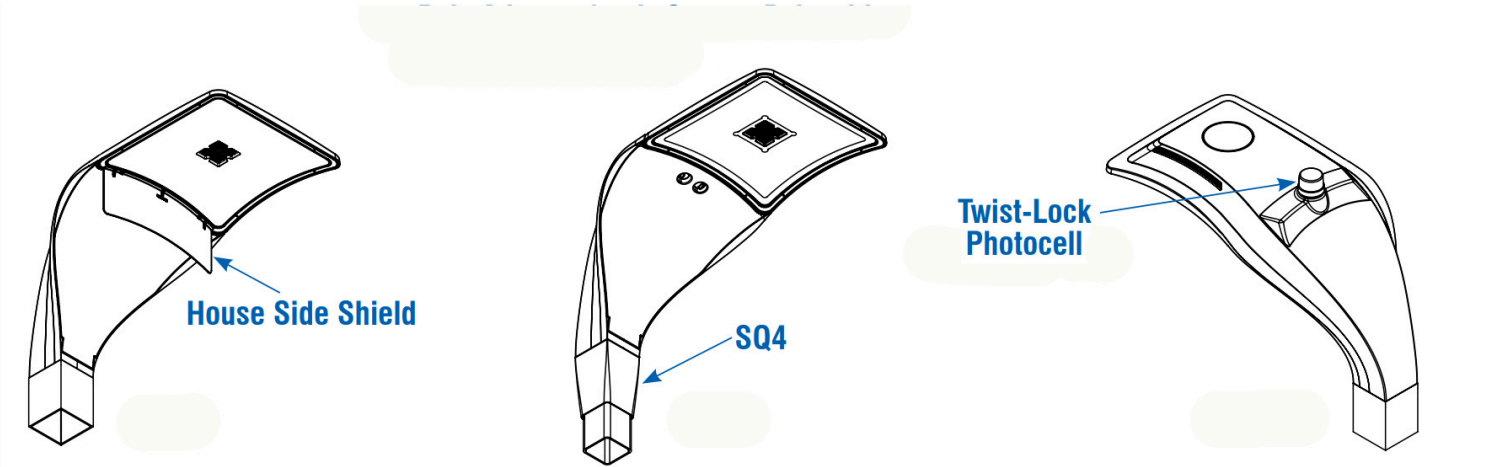

Other Features

