


Project Name


Qty

Type

Catalog / Part Number

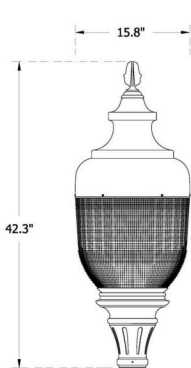

A75LED-5P

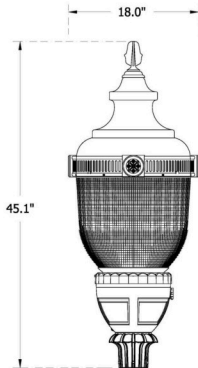

A75LED-991-CDR

Certifications



Description

The A75LED Columbia prismatic acorn is made of prismatic acrylic and is offered with variety of fitter options.
EPA: 1.41 (ft²) | WEIGHT: 28 LBS

Mounting Configuration

Wall Mount

Post Top

1 Arm Mount

1 Arm & Post Top

2 Arm Mount @ 180°

2 Arm Mount @ 90°

2Arm @180 & Post Top

3 Arms @ 120°

3 Arms @ 90°

3Arm @120 & Post Top

4 Arms @ 90°

4Arm @90 & Post Top

1Arm MidMount

2Arm MidMount @180

Pier Base

Features

Mounting Configuration

- 1W:** Wall Mount
1A: 1 Arm Mount
2A: 2 Arm Mount @ 180°
2APT: 2Arm @180 & Post Top
3A90: 3 Arms @ 90°
4A: 4 Arms @ 90°
1AM: 1 Arm MidMount
450PB: Pier Base
- PT:** Post Top
1APT: 1 Arm & Post Top
2A90: 2 Arm Mount @ 90°
3A: 3 Arms @ 120°
3APT: 3Arm @120 & Post Top
4APT: 4Arm @90 & Post Top
2AM: 2Arm MidMount @180

Fixture

A75LED: Columbia

Fitter

- 5P:** Slip fit 3" OD x 3" tall tenon/pole
73: Slip fit 3" OD x 4" tall tenon/pole
74: Slip fit 4" OD x 4" tall tenon/pole
990: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole
991: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole
992: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole
993: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole
994: Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole
995: Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole
BD4: Slip fit 4" OD x 5" tall tenon/pole
BD5: Slip fit 5" OD x 6" tall tenon/pole
BD7: Slip fit 7" OD x 1" tall tenon/pole
OL3: Oak-Leaf, Slip fit 3" OD x 3" tall tenon/pole
OL4: Oak-Leaf, Slip fit 4" OD x 3" tall tenon/pole
588: Art-Deco, Slip fit 3" OD x 3" tall tenon/pole
C2097: Low-Profile, Slip fit 7" OD x 1" tall tenon/pole

Optional Twist Lock Acorn

T: Twist-Lock Option for Acorn

Lens

A: Prismatic Acrylic Acorn


Finish



CCT - Color Temp (K)



Distribution Type



Optional Control Receptacle	R7: 7-Pin control receptacle only	
Optional Control	PE: Twist-Lock Photocontrol (120V-277V) PE4: Twist-Lock Photocontrol (347V-480V) SC: Shorting Cap PEC: Electronic Button Photocontrol (120V-277V) PEC4: Electronic Button Photocontrol (480V)	
Optional Fuse	FHD: Double Fuse and Holder	
Optional Ring	CDR: Cast Deco Ring, GOLD medallions CDRCL: Cast Deco Ring, custom logo medallions CDRP: Cast Deco Ring, Medallions painted to match fixture PBDR: Perforated Brass Deco Ring, raw brass	
Optional Terminal Block	TB: Terminal Block	
Optional Receptacle	GFI: 120V, 15A Duplex GFI for Utility Fitter	
Optional House Side Shield	HSS: 120° House Side Shield	
Optional Fixed Dimming Resistor Board	FDRB: Fixed Dimming Resistor Board	
Finish	BKT: Black Textured WHT: White Textured PGT: Park Green Textured ABZT: Arch Med Bronze Tex DBT: Dark Bronze Textured CM: Custom Match OI: Old Iron RT: Rust WBR: Weathered Brown CD: Cedar WBK: Weathered Black TT: Two Tone VG: Verde Green SI: Swedish Iron OWGT: Old World Gray Tex	

Light Source

LED	4L: 4 LEDs	
CCT - Color Temp (K)	27: 2,700K	30: 3,000K
	35: 3,500K	40: 4,000K
	50: 5,000K	
Distribution Type	T3: Type 3	
	T5: Type 5	
Driver	MDL02: 120V-277V, 250mA	MDH02: 347V-480V, 250mA
	MDL03: 120V-277V, 350mA	MDH03: 347V-480V, 350mA
	MDL05: 120V-277V, 500mA	MDH05: 347V-480V, 500mA
	MDL06: 120V-277V, 630mA	MDH06: 347V-480V, 630mA

Important

Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

How to Order

Mounting Configuration	Fixture	Fitter	Optional Twist Lock Acorn	LED	CCT - Color Temp (K)	Distribution Type	Driver	Lens
1W Wall Mount PT Post Top 1A 1 Arm Mount 1APT 1 Arm & Post Top 2A 2 Arm Mount @ 180° 2A90 2 Arm Mount @ 90° 2APT 2Arm @180 & Post Top 3A 3 Arms @ 120° 3A90 3 Arms @ 90° 3APT 3Arm @120 & Post Top 4A 4 Arms @ 90° 4APT 4Arm @90 & Post Top 1AM 1 Arm MidMount 2AM 2Arm MidMount @180 450PB Pier Base	A75LED Columbia	5P 3" OD x 3" tall tenon ⁽¹⁾ 73 Slip fit 3" OD x 4" tall tenon/pole 74 Slip fit 4" OD x 4" tall tenon/pole 990 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole ⁽¹⁾ 991 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole ⁽¹⁾ 992 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole ⁽¹⁾ 993 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole ⁽¹⁾ 994 Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole ⁽¹⁾ 995 Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole ⁽¹⁾ BD4 Slip fit 4" OD x 5" tall tenon/pole BD5 Slip fit 5" OD x 6" tall tenon/pole BD7 Slip fit 7" OD x 1" tall tenon/pole OL3 Oak-Leaf, Slip fit 3" OD x 3" tall tenon/pole OL4 Oak-Leaf, Slip fit 4" OD x 3" tall tenon/pole 588 Art-Deco, Slip fit 3" OD x 3" tall tenon/pole C2097 Low-Profile, Slip fit 7" OD x 1" tall tenon/pole ⁽¹⁾ ⁽²⁾ ⁽³⁾	T Twist-Lock Option for Acorn	4L 4 LEDs	27 2,700K 30 3,000K 35 3,500K 40 4,000K 50 5,000K	T3 Type 3 T5 Type 5	MDL02 120V-277V, 250mA MDH02 347V-480V, 250mA MDL03 120V-277V, 350mA MDH03 347V-480V, 350mA MDL05 120V-277V, 500mA MDH05 347V-480V, 500mA MDL06 120V-277V, 630mA MDH06 347V-480V, 630mA	A Prismatic Acrylic Acorn

Notes:

- 1. Fitter available with "Twist-lock" acorn option
- 2. Consult factory for use on concrete poles.
- 3. Not for use with button photocell

How to Order

Optional Control Receptacle ⁽⁴⁾ ⁽⁵⁾ ⁽⁶⁾	Optional Control	Optional Fuse ⁽¹⁰⁾	Optional Ring	Optional Terminal Block ⁽⁴⁾	Optional Receptacle ⁽⁴⁾ ⁽¹²⁾	Optional House Side Shield ⁽¹³⁾	Optional Fixed Dimming Resistor Board ⁽⁸⁾	Finish
R7 7-Pin control receptacle only	PE Twist-Lock Photocontrol (120V-277V) ⁽⁷⁾ PE4 Twist-Lock Photocontrol (347V-480V) ⁽⁷⁾ SC Shorting Cap ⁽⁷⁾ PEC Electronic Button Photocontrol (120V-277V) ⁽⁸⁾ ⁽⁹⁾ PEC4 Electronic Button Photocontrol (480V) ⁽⁸⁾ ⁽⁹⁾	FHD Double Fuse and Holder	CDR Cast Deco Ring, GOLD medallions CDRCL Cast Deco Ring, custom logo medallions ⁽¹¹⁾ CDRP Cast Deco Ring, Medallions painted to match fixture PBDR Perforated Brass Deco Ring, raw brass	TB Terminal Block	GFI 120V, 15A Duplex GFI for Utility Fitter	HSS 120° House Side Shield	FDRB Fixed Dimming Resistor Board	BKT Black Textured ⁽¹⁴⁾ WHT White Textured ⁽¹⁴⁾ PGT Park Green Textured ⁽¹⁴⁾ ABZT Arch Med Bronze Tex ⁽¹⁴⁾ DBT Dark Bronze Textured ⁽¹⁴⁾ CM Custom Match ⁽¹⁵⁾ OI Old Iron ⁽¹⁵⁾ RT Rust ⁽¹⁵⁾ WBR Weathered Brown ⁽¹⁵⁾ CD Cedar ⁽¹⁵⁾ WBK Weathered Black ⁽¹⁵⁾ TT Two Tone ⁽¹⁵⁾ VG Verde Green SI Swedish Iron OWGT Old World Gray Tex

Notes:

4. For 900 series utility fitter only.

5. Not for use with FDRB.

6. For use with standard 3-Pin photocells only, not for use with a wireless network controller.

7. Requires control receptacle.

8. Not for use with R7.

9. Not for use with C2097 fitter.
10. Ships loose for installation in base.

11. Consult factory for specification details.

12. For use with MDLxx driver only.

13. Not for use with TS optic.

14. Smooth finishes are available upon request.

15. Custom colors require upcharge.

Specifications

Available with Intellistreets® Technology	Intellistreets® is an integrated set of solutions offering the capability to see, hear, and record what's happening on your streets, through both cameras and audio sensors.
Fitter	The sand cast fitter is a heavy wall, low-copper aluminum 356 alloy for enhanced corrosion resistance and high tensile strength. It will have an 8-1/2" inside diameter opening to attach to the 8" neck of the lens. It includes 4 stainless steel Allen-head set screws for attachment. The fitter will include a one-piece ring bug gasket to resist insect penetration. Utility Fitter: The die-cast fitter shall be heavy wall, low-copper 360 aluminum alloy for enhanced corrosion resistance and high tensile strength. It shall have a hinged, tool-less entry door that provides open access to all components. The 900 series shall have an optional terminal block for ease of wiring, an optional Twist-Lock Photocontrol receptacle, an optional single GFCI outlet for auxiliary power needs. The top mounted driver mounting plate will provide tool-less removal from the housing using 2 finger latches. The fitter shall have a one-piece ring gasket to resist insect penetration into globe assembly. When supplied with GFCI receptacle a hole will be provided for cord and plug installation with the access door closed. When cord and plug is not in use a filler plug will be provided and shall be tethered to the fitter for easy recovery and installation. Twist Lock Option: The TL (Twist-Lock) fitter will have a die-cast aluminum twist-lock mechanism. The tool-less, quarter turn action allows for easy acorn/globe removal and replacement. The twist-lock mechanism is mechanically attached to the globe and is removable if the globe is broken or needs replacing.
Cast Decorative Ring	Optional cast aluminum decorative ring (CDR) is made up of a 2.75" tall horizontal band with vertical slots and a 3" medallion in a GOLD finish. Alternate medallion version painted to match fitter (CDRP). Consult factory for custom logos.
Polished Brass Decorative Ring	Optional 2.25" tall perforated banding ring made of brass. Alternate version painted to match fitter (PBD RP)
Hardware	Includes Stainless steel hardware. Most finishes will include hardware with a Black Oxide conversion coating. Light finishes will get non-color coated hardware (Whites and Silvers)
Serviceability	Easy access to service the lens in the field. Tool-less access to the driver compartment after the acorn is removed allows for trouble free servicing of the LED Driver and Surge Suppressor.
UL Listing	UL listed per UL1598 and CSA C22.2 No. 250.0 for the United States and Canada. Suitable for Wet Locations.
Electronic Driver	The LED driver is UL recognized and will be securely mounted inside the fixture, for optimized performance and longevity. It will be supplied with a quick-disconnect electrical connector on the power supply, providing easy power connections for fixture installation and maintenance. It will have DC voltage output and be a constant current design. It runs at 50/60HZ and will have overload, overheat, and short circuit protection. It will be supplied with a supplemental line-ground, line-neutral and neutral-ground electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines. It will be a high efficiency driver with a THD less than 20% and a high-power factor greater than .9. It will be dimming capable using a 0-10V signal, consult factory for more information.
Finish	Our 6 Stage Polyester Powder coat paint system offers a beautiful high-end finish that holds up to even the most extreme environments. Each part is inspected for quality and consistency before being released for shipment. Our system exceeds AAMA 2604, AAMA 2605, ASTM D523 and ASTM D4214 requirements.
Traditional Finish	Traditional paint finishes are available in Sternberg Lighting's Traditional product line. A range of colors help accent the decorative elements on the product. Finishes are available in textured or smooth. Available finishes include: Black, White, Park Green, Architectural Medium Bronze and Dark Bronze
Sternberg Select Finish	The Sternberg Select antique-inspired palette adds a touch of vintage elegance to modern applications. Old World Gray Textured is a 1 part powder coat with metallic flakes. Verde Green and Swedish Iron is a 2 part finish that includes a powder coat base coat with a hand applied antique top coat. The top coat is unique to each application and changes over time.
Warranty	7-year limited warranty. See Website for Terms and Conditions.

LEDs	The luminaire shall use high output, high brightness LEDs, consisting of a two piece assembly complete with Chip on Board (COB) LED component and COB holder frame. The LEDs shall be 100% recyclable; not contain lead, mercury or any other hazardous substances and shall be RoHS compliant. Lumen maintenance shall be determined in accordance with IESNA TM-21, based on LED manufacturer LM-80 test data of no less than 6,000 hours and in-situ testing of the luminaire by an NVLAP accredited Energy Efficient Lighting Products lab. The high performance white LED's will have a predicted lumen depreciation of approximately 100,000 hours with greater than 70% of initial output at 25°C. The High Brightness, High Output LEDs shall be 4000K (2700K, 3000K, 3500K or 5000K option) correlated color temperature (CCT) with a 70 (minimum) color rendering index (CRI). Consult factory for custom color CCT. The luminaire shall have a minimum _____ (see table) delivered initial lumen rating when operated at steady state with an average ambient temperature of 25°C (77°F). CCT Lumen Derate Values from 4,000K 2,700K (80+ CRI)=.88 3,000K (70+ CRI)=.97 3,500K (80+ CRI)=.93 5,000K (70+ CRI)=1.01
Optics	The luminaire shall be provided with refractor type optics from the external prismatic acorn lens. The luminaire shall provide Type ____ (3 or 5) light distribution. Testing shall be done in accordance with IESNA LM-79.
Backlight Optical Control	An optional INTERNAL 120° House Side Shield helps control backlight.
Fixed Dimming Resistor Board (FDRB)	Optional numbered 10-step selector switch allows for fine adjustment of the light levels in the field, repeatable from location to location. Offers dimming from 25% to 100% of the original output. Enclosure is composite material, sealed to protect components for the life of the product.
Photocontrols	Button Photocell: The photocontrol shall be mounted on the fixture and pre-wired to driver. The electronic button type photocontrol is instant on and will turn on at 1.5 footcandles and will turn off at 2-3 footcandles. See pole spec sheet for pole mounted version. Twist-Lock Style (Utility Fitter): The photocontrol shall be mounted in the utility fitter and prewired to driver. Utility fitter includes acrylic window to read ambient light levels. The twist lock type photocontrol is instant on with a 3-6 second turn off, and shall turn on at 1.5 footcandles with a turnoff at 2-3 footcandles. Photocontrol is 120-277 volt and warranted for 6 years. For use with standard photocells only, not for use with a wireless network controller.

Lumen Chart(s)

Model #	TA DELIVERED LUMENS	BUG	EFFICACY (LPW)	TS DELIVERED LUMENS	BUG	EFFICACY (LPW)	WATTAGE
4L40T_-MDL06	10895	B2U5G5	111.2	10720	B3U5G5	109.4	98
4L30T_-MDL06	10550	B2U5G5	107.7	10385	B3U5G5	106.0	98
4L27T_-MDL06	9595	B2U5G5	97.9	9440	B3U5G5	96.3	98
4L40T_-MDL05	8930	B1U5G5	119.1	8840	B3U5G5	117.9	75
4L30T_-MDL05	8650	B1U5G5	115.3	8560	B3U5G5	114.1	75
4L27T_-MDL05	7865	B1U5G5	104.9	7785	B3U5G5	103.8	75
4L40T_-MDL03	6985	B1U5G5	127.0	6925	B3U5G4	125.9	55
4L30T_-MDL03	6765	B1U5G5	123.0	6705	B3U5G4	121.9	55
4L27T_-MDL03	6150	B1U5G5	111.8	6095	B3U5G4	110.8	55
4L40T_-MDL02	5150	B1U5G5	128.8	5120	B3U5G3	128.0	40
4L30T_-MDL02	4990	B1U5G5	124.8	4960	B3U5G3	124.0	40
4L27T_-MDL02	4535	B1U5G5	113.4	4510	B3U5G3	112.8	40

Fitters



5P Fitter

10-1/8" W x 10-3/8" H
Fits 3" OD x 3" tall tenon/pole



BD4 Fitter

10-1/8" W x 10-1/8" H
Fits 4" OD x 5" tall tenon/pole



BD5 Fitter

10-1/8" W x 10-1/4" H
Fits 5" OD x 6" tall tenon/pole



BD7 Fitter

10-1/8" W x 11-3/4" H
Fits 7" OD x 1" tall tenon/pole



588 Fitter

14-1/2" W x 14-1/4" H
Fits 3" OD x 3" tall tenon/pole



C2097 Fitter

10" W x 3-1/4" H
Fits 7" OD x 1" tall tenon/pole



992 Utility Fitter

10-1/2" W x 13-1/8" H
Fits 3" OD x 3" tall tenon/pole



991 Utility Fitter

10-1/2" W x 13-1/8" H
Fits 3" OD x 3" tall tenon/pole



OL3 (or OL4) Fitter

10-1/8" W x 10-3/8" H
Fits 3" (or 4") OD x 3" tall tenon/pole



990 (or 994) Utility Fitter

10-1/2" W x 15-3/4" H
Fits 3" (or 4") OD x 3" tall tenon/pole



993 (or 995) Utility Fitter

10-1/2" W x 15-3/4" H
Fits 3" (or 4") OD x 3" tall tenon/pole



73 (or 74) Fitter

9-3/4" W x 13-1/4" H
Fits 3" (or 4") OD x 4" tall tenon/pole

Options



Perforated Brass Decorative Ring (PBDR)



Cast Decorative Ring (CDR)




Twist-Lock Ring (TL)



Button Photocell (PEC)



Fixed Dimming Resistor Board (FDRB)

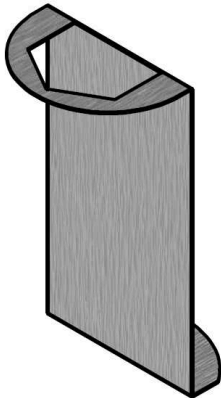

House Side Shield (HSS)

Utility Fitter Details

Optional Accessories

990 Utility Fitter

