


Project Name


Qty

Type

Catalog / Part Number

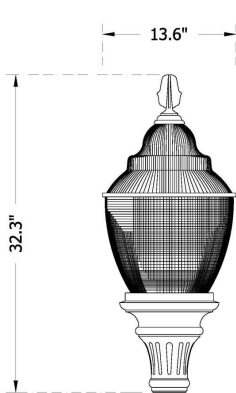

G74LED-5P

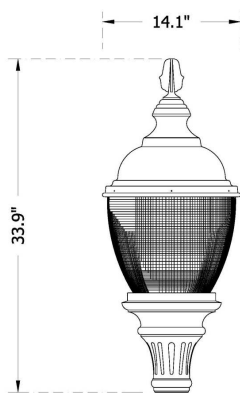

G74SRLED-5P

Certifications	Description
	The G74LED Hometown series is a nostalgic 1920's glass acorn fixture with distinct styling which consists of a decorative cast aluminum fitter and a high efficiency prismatic glass acorn. EPA: 1.41 (ft²) WEIGHT: 35 LBS
Mounting Configuration	Features
 Wall Mount  Post Top  1 Arm Mount  1 Arm & Post Top  2 Arm Mount @ 180°  2 Arm Mount @ 90°  2 Arm @ 180° & Post Top  3 Arms @ 120°  3 Arms @ 90°  3 Arm @ 120° & Post Top  4 Arms @ 90°  4 Arm @ 90° & Post Top  1 Arm Mid-Mount  2 Arm Mid-Mount @180°  Pier Base Mounting Configuration 1W: Wall Mount PT: Post Top 1A: 1 Arm Mount 1APT: 1 Arm & Post Top 2A: 2 Arm Mount @ 180° 2A90: 2 Arm Mount @ 90° 2APT: 2 Arm @ 180° & Post Top 3A: 3 Arms @ 120° 3A90: 3 Arms @ 90° 3APT: 3 Arm @ 120° & Post Top 4A: 4 Arms @ 90° 4APT: 4 Arm @ 90° & Post Top 1AM: 1 Arm Mid-Mount 2AM: 2 Arm Mid-Mount @180° 450PB: Pier Base Optional Control Receptacle R7: 7-Pin control receptacle only Optional Control PE: Twist-Lock Photocontrol (120V-277V) PE4: Twist-Lock Photocontrol (347V-480V) SC: Shorting Cap PEC: Electronic Button Photocontrol (120V-277V) PEC4: Electronic Button Photocontrol (480V) Optional Fuse FHD: Double Fuse and Holder Optional House Side Shield HSS: 120° House Side Shield Optional Fixed Dimming Resistor Board FDRB: Fixed Dimming Resistor Board	

Finish



Black
Textured



White
Textured



Park
Green
Textured



Arch Med
Bronze Tex



Dark
Bronze
Textured



Verde
Green



Swedish
Iron



Old World
Gray Tex



Old Iron



Rust



Weathered
Brown



Cedar



Weathered
Black




Two Tone



Custom
Match

Distribution Type



Type 3



Type 5

CCT - Color Temp (K)



2,700K



3,000K



3,500K



4,000K



5,000K

Physical		
Fixture	G74LED: Glass Roof G74SRLED: Solid Roof	
Fitter	5P: Slip fit 3" OD x 3" tall tenon/pole 73: Slip fit 3" OD x 4" tall tenon/pole 74: Slip fit 4" OD x 4" tall tenon/pole 990: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole 991: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole 992: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole 993: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole 994: Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole 995: Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole BD4: Slip fit 4" OD x 5" tall tenon/pole BD5: Slip fit 5" OD x 6" tall tenon/pole BD7: Slip fit 7" OD x 1" tall tenon/pole OL3: Oak-Leaf, Slip fit 3" OD x 3" tall tenon/pole OL4: Oak-Leaf, Slip fit 4" OD x 3" tall tenon/pole 588: Art-Deco, Slip fit 3" OD x 3" tall tenon/pole C2097: Low-Profile, Slip fit 7" OD x 1" tall tenon/pole	
Lens	G: Glass	
Optional Ring	PBDR: Perforated Brass Deco Ring, raw brass PBDRP: Perforated Brass Deco Ring, painted to match fixture	
Optional Terminal Block	TB: Terminal Block	
Optional Receptacle	GFI: 120V, 15A Duplex GFI for Utility Fitter	
Finish	BKT: Black Textured WHT: White Textured PGT: Park Green Textured ABZT: Arch Med Bronze Tex DBT: Dark Bronze Textured VG: Verde Green SI: Swedish Iron OWGT: Old World Gray Tex OI: Old Iron RT: Rust WBR: Weathered Brown CD: Cedar WBK: Weathered Black TT: Two Tone CM: Custom Match	

Light Source		
LED	4L: 4 LEDs	
CCT - Color Temp (K)	27: 2,700K	30: 3,000K
	35: 3,500K	40: 4,000K
	50: 5,000K	
Distribution Type	T3: Type 3 T5: Type 5	

Electrical and control		
Driver	MDL02: 120V-277V, 250mA MDL03: 120V-277V, 350mA MDL05: 120V-277V, 500mA MDL06: 120V-277V, 630mA	MDH02: 347V-480V, 250mA MDH03: 347V-480V, 350mA MDH05: 347V-480V, 500mA MDH06: 347V-480V, 630mA

Sternberg

555 Lawrence Ave, Roselle, IL, 60172, US | T 847-588-3400 | contactus@sternberglighting.com
www.sternberglighting.com www.sternberglighting.com/products/644

Sternberg reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2025.03.04 Copyright © 2025 Sternberg

2 / 9

How to Order

Mounting Configuration (1)	Fixture	Fitter	LED	CCT - Color Temp (K)	Distribution Type	Driver	Lens
1W Wall Mount PT Post Top 1A 1 Arm Mount 1APT 1 Arm & Post Top 2A 2 Arm Mount @ 180° 2A90 2 Arm Mount @ 90° 2APT 2 Arm @ 180° & Post Top 3A 3 Arms @ 120° (2) 3A90 3 Arms @ 90° 3APT 3 Arm @ 120° & Post Top (2) 4A 4 Arms @ 90° 4APT 4 Arm @ 90° & Post Top 1AM 1 Arm Mid-Mount 2AM 2 Arm Mid-Mount @ 180° 450PB Pier Base (3)	G74LED Glass Roof G74SRLED Solid Roof	5P Slip fit 3" OD x 3" tall tenon/pole 73 Slip fit 3" OD x 4" tall tenon/pole 74 Slip fit 4" OD x 4" tall tenon/pole 990 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole 991 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole 992 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole 993 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole 994 Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole 995 Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole BD4 Slip fit 4" OD x 5" tall tenon/pole BD5 Slip fit 5" OD x 6" tall tenon/pole BD7 Slip fit 7" OD x 1" tall tenon/pole OL3 Oak-Leaf, Slip fit 3" OD x 3" tall tenon/pole OL4 Oak-Leaf, Slip fit 4" OD x 3" tall tenon/pole 588 Art-Deco, Slip fit 3" OD x 3" tall tenon/pole C2097 Low-Profile, Slip fit 7" OD x 1" tall tenon/pole (4) (5)	4L 4 LEDs	27 2,700K 30 3,000K 35 3,500K 40 4,000K 50 5,000K	T3 Type 3 T5 Type 5	MDL02 120V-277V, 250mA MDH02 347V-480V, 250mA MDL03 120V-277V, 350mA MDH03 347V-480V, 350mA MDL05 120V-277V, 500mA MDH05 347V-480V, 500mA MDL06 120V-277V, 630mA MDH06 347V-480V, 630mA	G Glass

- Notes:
1. Use 3" fitter for arm applications.

2. Only available with a round profile pole.

3. For use with 3" fitters only

4. Consult factory for use on concrete poles.

5. Not for use with button photocell

How to Order

Optional Control Receptacle ⁽⁶⁾ ⁽⁷⁾ ⁽⁸⁾	Optional Control	Optional Fuse ⁽¹²⁾	Optional Ring	Optional Terminal Block ⁽⁶⁾	Optional Receptacle ⁽⁶⁾ ⁽¹³⁾	Optional House Side Shield ⁽¹⁴⁾	Optional Fixed Dimming Resistor Board ⁽¹⁰⁾	Finish
R7 7-Pin control receptacle only	PE Twist-Lock Photocontrol (120V-277V) ⁽⁹⁾ PE4 Twist-Lock Photocontrol (347V-480V) ⁽⁹⁾ SC Shorting Cap ⁽⁹⁾ PEC Electronic Button Photocontrol (120V-277V) ⁽¹⁰⁾ ⁽¹¹⁾ PEC4 Electronic Button Photocontrol (480V) ⁽¹⁰⁾ ⁽¹¹⁾	FHD Double Fuse and Holder	PBDR Perforated Brass Deco Ring, raw brass PBDRP Perforated Brass Deco Ring, painted to match fixture	TB Terminal Block	GFI 120V, 15A Duplex GFI for Utility Fitter	HSS 120° House Side Shield	FDRB Fixed Dimming Resistor Board	BKT Black Textured ⁽¹⁵⁾ WHT White Textured ⁽¹⁵⁾ PGT Park Green Textured ⁽¹⁵⁾ ABZT Arch Med Bronze Tex ⁽¹⁵⁾ DBT Dark Bronze Textured ⁽¹⁵⁾ VG Verde Green SI Swedish Iron OWGT Old World Gray Tex OI Old Iron ⁽¹⁶⁾ RT Rust ⁽¹⁶⁾ WBR Weathered Brown ⁽¹⁶⁾ CD Cedar ⁽¹⁶⁾ WBK Weathered Black ⁽¹⁶⁾ TT Two Tone ⁽¹⁶⁾ CM Custom Match ⁽¹⁶⁾

Notes:

- 6.** For 900 series utility fitter only.

7. Not for use with FDRB.

8. For use with standard 3-Pin photocells only, not for use with a wireless network controller.

9. Requires control receptacle.

10. Not for use with R7.

11. Not for use with C2097 fitter.
- 12.** Ships loose for installation in base.

13. For use with MDLxx driver only.

14. Not for use with TS optic.

15. Smooth finishes are available upon request.

16. Custom colors require upcharge.

Specifications

Available with Intellistreets® Technology	Intellistreets® is an integrated set of solutions offering the capability to see, hear, and record what's happening on your streets, through both cameras and audio sensors.
Fitter	The sand cast fitter is a heavy wall, low-copper aluminum 356 alloy for enhanced corrosion resistance and high tensile strength. It will have an 8-1/2" inside diameter opening to attach to the 8" neck of the lens. It includes 4 stainless steel Allen-head set screws for attachment. The fitter will include a one-piece ring bug gasket to resist insect penetration. Utility Fitter: The die-cast fitter shall be heavy wall, low-copper 360 aluminum alloy for enhanced corrosion resistance and high tensile strength. It shall have a hinged, tool-less entry door that provides open access to all components. The 900 series shall have an optional terminal block for ease of wiring, an optional Twist-Lock Photocontrol receptacle, an optional single GFCI outlet for auxiliary power needs. The top mounted driver mounting plate will provide tool-less removal from the housing using 2 finger latches. The fitter shall have a one-piece ring gasket to resist insect penetration into globe assembly. When supplied with GFCI receptacle a hole will be provided for cord and plug installation with the access door closed. When cord and plug is not in use a filler plug will be provided and shall be tethered to the fitter for easy recovery and installation.
Polished Brass Decorative Ring	Optional 2.25" tall perforated banding ring made of brass. Alternate version painted to match fitter (PBDRP)
Hardware	Includes Stainless steel hardware. Most finishes will include hardware with a Black Oxide conversion coating. Light finishes will get non-color coated hardware (Whites and Silvers)
Glass Lens	Includes a prismatic molded borosilicate glass refractor that will hold its optical efficiency for the life of the product. External prisms distribute the light downward while offering glare mitigation.
Serviceability	Tool-less access to the driver compartment after the acorn is removed allows for trouble free servicing of the LED Driver and Surge Suppressor.
UL Listing	UL listed per UL1598 and CSA C22.2 No. 250.0 for the United States and Canada. Suitable for Wet Locations.
Electronic Driver	The LED driver is UL recognized and will be securely mounted inside the fixture, for optimized performance and longevity. It will be supplied with a quick-disconnect electrical connector on the power supply, providing easy power connections for fixture installation and maintenance. It will have DC voltage output and be a constant current design. It runs at 50/60HZ and will have overload, overheat, and short circuit protection. It will be supplied with a supplemental line-ground, line-neutral and neutral-ground electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines. It will be a high efficiency driver with a THD less than 20% and a high-power factor greater than .9. It will be dimming capable using a 0-10V signal, consult factory for more information.
Finish	Our 6 Stage Polyester Powder coat paint system offers a beautiful high-end finish that holds up to even the most extreme environments. Each part is inspected for quality and consistency before being released for shipment. Our system exceeds AAMA 2604, AAMA 2605, ASTM D523 and ASTM D4214 requirements.
Traditional Finish	Traditional paint finishes are available in Sternberg Lighting's Traditional product line. A range of colors help accent the decorative elements on the product. Finishes are available in textured or smooth. Available finishes include: Black, White, Park Green, Architectural Medium Bronze and Dark Bronze
Sternberg Select Finish	The Sternberg Select antique-inspired palette adds a touch of vintage elegance to modern applications. Old World Gray Textured is a 1 part powder coat with metallic flakes. Verde Green and Swedish Iron is a 2 part finish that includes a powder coat base coat with a hand applied antique top coat. The top coat is unique to each application and changes over time.
Custom Finish	Custom finishes are offered to adapt to any application. Rust, Weathered Brown and Cedar are special 1 part powder coat finishes with a distinctive look. Old Iron and Weathered Black are 2 part finishes that includes a powder coat base coat with a hand applied antique top coat. The top coat is unique to each application and changes over time. Two-Tone and Custom Match options are available to blend Sternberg product with the site, consult factory for more information.
Warranty	7-year limited warranty. See Website for Terms and Conditions.

LEDs	The LEDs in this system will be mounted vertically. They fully illuminate the luminaire and allow some up-light for vertical illumination. The luminaire shall use high output, high brightness LEDs, consisting of a two piece assembly complete with Chip on Board (COB) LED component and COB holder frame. The LEDs shall be 100% recyclable; not contain lead, mercury or any other hazardous substances and shall be RoHS compliant. Lumen maintenance shall be determined in accordance with IESNA TM-21, based on LED manufacturer LM-80 test data of no less than 6,000 hours and in-situ testing of the luminaire by an NVLAP accredited Energy Efficient Lighting Products lab. The high performance white LED's will have a predicted lumen depreciation of approximately 100,000 hours with greater than 70% of initial output at 25°C. The High Brightness, High Output LEDs shall be 4000K (2700K, 3000K, 3500K or 5000K option) correlated color temperature (CCT) with a 70 (minimum) color rendering index (CRI). Consult factory for custom color CCT. The luminaire shall have a minimum _____ (see table) delivered initial lumen rating when operated at steady state with an average ambient temperature of 25°C (77°F). CCT Lumen Derate Values from 4,000K 2,700K (80+ CRI)=.88 3,000K (70+ CRI)=.97 3,500K (80+ CRI)=.93 5,000K (70+ CRI)=1.01
Optics	The luminaire shall be provided with refractor type optics from the external prismatic acorn lens. The luminaire shall provide Type ____ (3 or 5) light distribution. Testing shall be done in accordance with IESNA LM-79.
Backlight Optical Control	An optional INTERNAL 120° House Side Shield helps control backlight.
Fixed Dimming Resistor Board (FDRB)	Optional numbered 10-step selector switch allows for fine adjustment of the light levels in the field, repeatable from location to location. Offers dimming from 25% to 100% of the original output. Enclosure is composite material, sealed to protect components for the life of the product.
Photocontrols	Button Photocell: The photocontrol shall be mounted on the fixture and pre-wired to driver. The electronic button type photocontrol is instant on and will turn on at 1.5 footcandles and will turn off at 2-3 footcandles. See pole spec sheet for pole mounted version. Twist-Lock Style (Utility Fitter): The photocontrol shall be mounted in the utility fitter and prewired to driver. Utility fitter includes acrylic window to read ambient light levels. The twist lock type photocontrol is instant on with a 3-6 second turn off, and shall turn on at 1.5 footcandles with a turnoff at 2-3 footcandles. Photocontrol is 120-277 volt and warranted for 6 years. For use with standard photocells only, not for use with a wireless network controller.

Lumen Chart(s)

Model #	T3 DELIVERED LUMENS	BUG	EFFICACY (LPW)	T5 DELIVERED LUMENS	BUG	EFFICACY (LPW)	WATTAGE
4L40T_-MDL06	9565	B2U5G5	97.6	10480	B3U5G5	106.9	98
4L30T_-MDL06	9265	B2U5G5	94.5	10150	B3U5G5	103.6	98
4L27T_-MDL06	8420	B2U5G5	85.9	9230	B3U5G5	94.2	98
4L40T_-MDL05	7935	B2U5G5	105.8	8680	B3U5G4	115.7	75
4L30T_-MDL05	7685	B2U5G5	102.5	8405	B3U5G4	112.1	75
4L27T_-MDL05	6985	B2U5G5	93.1	7645	B3U5G4	101.9	75
4L40T_-MDL03	6250	B1U5G5	113.6	6790	B3U5G4	123.5	55
4L30T_-MDL03	6055	B1U5G5	110.1	6575	B3U5G4	119.5	55
4L27T_-MDL03	5505	B1U5G5	100.1	5980	B3U5G4	108.7	55
4L40T_-MDL02	4640	B1U5G4	116.0	5020	B3U5G3	125.5	40
4L30T_-MDL02	4495	B1U5G4	112.4	4860	B3U5G3	121.5	40
4L27T_-MDL02	4085	B1U5G4	102.1	4420	B3U5G3	110.5	40

Options



Button Photocell (PEC)



Perforated Brass Decorative Ring (PBDR)



Double Fuse Holder & (2) 3A Fuses (FHD)

Fitters



5P Fitter
10-1/8" W x 10-3/8" H
Fits 3" OD x 3" tall tenon/pole



BD4 Fitter
10-1/8" W x 10-1/8" H
Fits 4" OD x 5" tall tenon/pole



BD5 Fitter
10-1/8" W x 10-1/4" H
Fits 5" OD x 6" tall tenon/pole



BD7 Fitter
10-1/8" W x 11-3/4" H
Fits 7" OD x 1" tall tenon/pole



588 Fitter
14-1/2" W x 14-1/4" H
Fits 3" OD x 3" tall tenon/pole



C2097 Fitter
10" W x 3-1/4" H
Fits 7" OD x 1" tall tenon/pole



992 Utility Fitter
10-1/2" W x 13-1/8" H
Fits 3" OD x 3" tall tenon/pole



991 Utility Fitter
10-1/2" W x 13-1/8" H
Fits 3" OD x 3" tall tenon/pole



OL3 (or OL4) Fitter
10-1/8" W x 10-3/8" H
Fits 3" (or 4") OD x 3" tall tenon/pole



990 (or 994) Utility Fitter
10-1/2" W x 15-3/4" H
Fits 3" (or 4") OD x 3" tall tenon/pole



993 (or 995) Utility Fitter
10-1/2" W x 15-3/4" H
Fits 3" (or 4") OD x 3" tall tenon/pole



73 (or 74) Fitter
9-3/4" W x 13-1/4" H
Fits 3" (or 4") OD x 4" tall tenon/pole

Utility Fitter Details

Optional Accessories

990 Utility Fitter

