


Project Name

Qty

Type

Catalog / Part Number

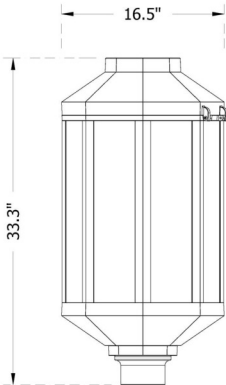

7 Year Warranty

Description

The 1335LED Revere is a large scale modern replica of a gothic styled octagonal fixture. It uses heavy wall aluminum castings and includes a hinged roof with internal heatsink. Offered with a variety of lens options.

EPA: 3.96 (#²) | WEIGHT: 45 LBS

Mounting Configuration

Wall Mount

Post Top

1 Arm Mount

1 Arm & Post Top

2 Arm Mount @ 180°

2 Arm Mount @ 90°

2 Arm @ 180° & Post Top

3 Arms @ 120°

3 Arms @ 90°

3 Arm @ 120° & Post Top

4 Arms @ 90°

4 Arm @ 90° & Post

1 Arm Mid-Mount

2 Arm Mid-Mount @ 180°

Pier Base

Features

Mounting Configuration

1W: Wall Mount

PT: Post Top

1A: 1 Arm Mount

1APT: 1 Arm & Post Top

2A: 2 Arm Mount @ 180°

2A90: 2 Arm Mount @ 90°

2APT: 2 Arm @ 180° & Post Top

3A: 3 Arms @ 120°

3A90: 3 Arms @ 90°

3APT: 3 Arm @ 120° & Post Top

4A: 4 Arms @ 90°

4APT: 4 Arm @ 90° & Post Top

1AM: 1 Arm Mid-Mount

2AM: 2 Arm Mid-Mount @ 180°

550PB: Pier Base

Optional Control Receptacle

R7: 7-Pin control receptacle only

Optional Control

PE: Twist-Lock Photocontrol (120V-277V)

PE4: Twist-Lock Photocontrol (347V-480V)

SC: Shorting Cap

PEC: Electronic Button Photocontrol (120V-277V)

PEC4: Electronic Button Photocontrol (480V)

Optional Fuse

FHD: Double Fuse and Holder

Optional House Side Shield

BLOC: Back Light Optical Control

Optional Fixed Dimming Resistor Board

FDRB: Fixed Dimming Resistor Board

Finish

  
Black  
Textured

  
White  
Textured

  
Park  
Green  
Textured

  
Arch  
Med  
Bronze  
Tex

  
Dark  
Bronze  
Textured

  
Verde  
Green

  
Swedish  
Iron

  
Old  
World  
Gray  
Tex

  
Old  
Iron

  
Rust

  
Weathered Cedar  
Brown

  
Weathered  
Black

  
Two  
Tone

  
Custom  
Match

CCT - Color Temp (K)

  
2,700K

  
3,000K

  
3,500K

  
4,000K

  
5,000K

Distribution Type

  
Type 2

  
Type 3

  
Type 4

  
Type 5

Certifications



| Physical                    |                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fixture                     | 1335LED: Reverse                                                                                                                                                                                                                                                                                                                 |
| Fitter                      | 3: Slip fit 3" OD x 3" tall tenon/pole<br>4: To slip fit 4" OD x 3" tall tenon<br>5: To slip fit 5" OD x 3" tall tenon<br>7: Slip fit 7" OD x 1" tall tenon/pole                                                                                                                                                                 |
| Lens                        | SV1: Flat Soft Vue Light Diffused Acrylic<br>SV2: Flat Soft Vue Moderate Diffused Acrylic<br>SV4: Flat Soft Vue Maximum Diffused Acrylic<br>CTA: Clear Textured Acrylic<br>CSA: Clear Seeded Acrylic<br>PA: Prismatic Acrylic<br>ATA: Amber Textured Acrylic                                                                     |
| Optional Internal Flat Lens | SV1F: Light diffused internal flat lens<br>SV2F: Moderate diffused internal flat lens                                                                                                                                                                                                                                            |
| Finish                      | BKT: Black Textured<br>WHT: White Textured<br>PGT: Park Green Textured<br>ABZT: Arch Med Bronze Tex<br>DBT: Dark Bronze Textured<br>CM: Custom Match<br>OI: Old Iron<br>RT: Rust<br>WBR: Weathered Brown<br>CD: Cedar<br>WBK: Weathered Black<br>TT: Two Tone<br>VG: Verde Green<br>SI: Swedish Iron<br>OWGT: Old World Gray Tex |
| Light Source                |                                                                                                                                                                                                                                                                                                                                  |
| LED                         | 32L: 32 LEDs<br>24L: 24 LEDs<br>12L: 12 LEDs                                                                                                                                                                                                                                                                                     |
| CCT - Color Temp (K)        | 27: 2,700K<br>30: 3,000K<br>35: 3,500K<br>40: 4,000K<br>50: 5,000K                                                                                                                                                                                                                                                               |
| Distribution Type           | T2: Type 2<br>T3: Type 3<br>T4: Type 4<br>T5: Type 5                                                                                                                                                                                                                                                                             |
| Electrical and control      |                                                                                                                                                                                                                                                                                                                                  |
| Driver                      | MDL008: 120V-277V, 80mA<br>MDH008: 347V-480V, 80mA<br>MDL010: 120V-277V, 100mA<br>MDH010: 347V-480V, 100mA<br>MDL012: 120V-277V, 120mA<br>MDH012: 347V-480V, 120mA<br>MDL014: 120V-277V, 140mA<br>MDH014: 347V-480V, 140mA                                                                                                       |

How to Order

| Mounting Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Fixture                  | Fitter                                                                                                                                                                                                              | LED                                                                     | CCT - Color Temp (K)                                                                                            | Distribution Type                                                                        | Driver                                                                                                                                                                                                                                                                                                                                                                                   | Lens                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1W</b><br>Wall Mount<br><b>PT</b><br>Post Top<br><b>1A</b><br>1 Arm Mount<br><b>1APT</b><br>1 Arm & Post Top<br><b>2A</b><br>2 Arm Mount @ 180°<br><b>2A90</b><br>2 Arm Mount @ 90°<br><b>2APT</b><br>2 Arm @ 180° & Post Top<br><b>3A</b><br>3 Arms @ 120° <sup>(1)</sup><br><b>3A90</b><br>3 Arms @ 90°<br><b>3APT</b><br>3 Arm @ 120° & Post Top<br><b>4A</b><br>4 Arms @ 90°<br><b>4APT</b><br>4 Arm @ 90° & Post Top<br><b>1AM</b><br>1 Arm Mid-Mount<br><b>2AM</b><br>2 Arm Mid-Mount @180°<br><b>550PB</b><br>Pier Base <sup>(2)</sup> | <b>1335LED</b><br>Revere | <b>3</b><br>Slip fit 3" OD x 3" tall tenon/pole <sup>(3)</sup><br><b>4</b><br>To slip fit 4" OD x 3" tall tenon<br><b>5</b><br>To slip fit 5" OD x 3" tall tenon<br><b>7</b><br>Slip fit 7" OD x 1" tall tenon/pole | <b>32L</b><br>32 LEDs<br><b>24L</b><br>24 LEDs<br><b>12L</b><br>12 LEDs | <b>27</b><br>2,700K<br><b>30</b><br>3,000K<br><b>35</b><br>3,500K<br><b>40</b><br>4,000K<br><b>50</b><br>5,000K | <b>T2</b><br>Type 2<br><b>T3</b><br>Type 3<br><b>T4</b><br>Type 4<br><b>T5</b><br>Type 5 | <b>MDL008</b><br>120V-277V, 80mA<br><b>MDH008</b><br>347V-480V, 80mA<br><b>MDL010</b><br>120V-277V, 100mA <sup>(4)</sup><br><b>MDH010</b><br>347V-480V,100mA <sup>(4)</sup><br><b>MDL012</b><br>120V-277V, 120mA <sup>(4)</sup><br><b>MDH012</b><br>347V-480V,120mA <sup>(4)</sup><br><b>MDL014</b><br>120V-277V,140mA <sup>(5)</sup><br><b>MDH014</b><br>347V-480V,140mA <sup>(5)</sup> | <b>SV1</b><br>Flat Soft Vue Light Diffused Acrylic<br><b>SV2</b><br>Flat Soft Vue Moderate Diffused Acrylic<br><b>SV4</b><br>Flat Soft Vue Maximum Diffused Acrylic<br><b>CTA</b><br>Clear Textured Acrylic<br><b>CSA</b><br>Clear Seeded Acrylic<br><b>PA</b><br>Prismatic Acrylic<br><b>ATA</b><br>Amber Textured Acrylic |

Notes:

1. Only available with a round profile pole.  
2. For use with (3) fitter only.  
3. Use 3" fitter for arm applications.

4. 32L system only.  
5. 12L system only.

How to Order

| Optional Control Receptacle <sup>(6)</sup> | Optional Control                                                                                                                                                                                                                                                                                                    | Optional Fuse <sup>(8)</sup>         | Optional House Side Shield <sup>(9)</sup> | Optional Internal Flat Lens                                                                                 | Optional Fixed Dimming Resistor Board <sup>(10)</sup> | Finish                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>R7</b><br>7-Pin control receptacle only | <b>PE</b><br>Twist-Lock Photocontrol (120V-277V) <sup>(7)</sup><br><br><b>PE4</b><br>Twist-Lock Photocontrol (347V-480V) <sup>(7)</sup><br><br><b>SC</b><br>Shorting Cap <sup>(7)</sup><br><br><b>PEC</b><br>Electronic Button Photocontrol (120V-277V)<br><br><b>PEC4</b><br>Electronic Button Photocontrol (480V) | <b>FHD</b><br>Double Fuse and Holder | <b>BLOC</b><br>Back Light Optical Control | <b>SV1F</b><br>Light diffused internal flat lens<br><br><b>SV2F</b><br>Moderate diffused internal flat lens | <b>FDRB</b><br>Fixed Dimming Resistor Board           | <b>BKT</b><br>Black Textured <sup>(11)</sup><br><b>WHT</b><br>White Textured <sup>(11)</sup><br><b>PGT</b><br>Park Green Textured <sup>(11)</sup><br><b>ABZT</b><br>Arch Med Bronze Tex <sup>(11)</sup><br><b>DBT</b><br>Dark Bronze Textured <sup>(11)</sup><br><b>CM</b><br>Custom Match <sup>(12)</sup><br><b>OI</b><br>Old Iron <sup>(12)</sup><br><b>RT</b><br>Rust <sup>(12)</sup><br><b>WBR</b><br>Weathered Brown <sup>(12)</sup><br><b>CD</b><br>Cedar <sup>(12)</sup><br><b>WBK</b><br>Weathered Black <sup>(12)</sup><br><b>TT</b><br>Two Tone <sup>(12)</sup><br><b>VG</b><br>Verde Green<br><b>SI</b><br>Swedish Iron<br><b>OWGT</b><br>Old World Gray Tex |

Notes:

6. Not for use with FDRB.

7. Requires control receptacle.

8. Ships loose for installation in base.

9. Not for use with TS optic.

10. Not for use with R7.

11. Smooth finishes are available upon request.

12. Custom colors require upcharge.

Specifications

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Housing                 | The heavy wall sand cast housing uses a low-copper aluminum 356 alloy for enhanced corrosion resistance and high tensile strength.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Fitter                  | The fitter shall be heavy wall die cast aluminum for high tensile strength. It includes 4 stainless steel Allen-head set screws for attachment to a pole/tenon. The fixture can slip-fit a 3"OD (3) , 4"OD (4) or 5"OD (5) x 3" tall tenons/poles. Also available to slip a 7"OD x 1" tall tenon/pole (7).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Internal Lens           | An optional internal diffusing lens can be added for visual comfort. Suggested for use with CSA lenses but can be used in addition to any other external lens.<br>Optional (SV1F) light diffused acrylic flat horizontal lens.<br>Optional (SV2F) moderate diffused acrylic flat horizontal lens.<br>Optional (SV4F) maximum diffused acrylic flat horizontal lens.                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Hardware                | Includes Stainless steel hardware. Most finishes will include hardware with a Black Oxide conversion coating. Light finishes will get non-color coated hardware (Whites and Silvers)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Serviceability          | Tool-less access to the driver compartment for ease of installation and maintenance.<br>Easy access to service the lens in the field.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Lens                    | Optional SoftVue™ lens provides optimal visual comfort.<br>The lantern includes a variety of 1/8" thick lenses installed internally to the body and held in place with aluminum clips.<br>(CSA) Clear Seeded Acrylic<br>(CTA) Clear Textured Acrylic<br>(SV1) Soft Vue Light Diffused Acrylic<br>(SV2) Soft Vue Moderate Diffused Acrylic<br>(SV4) Soft Vue Maximum Diffused Acrylic<br>(PA) Prismatic Acrylic<br>(ATA) Amber Textured Acrylic                                                                                                                                                                                                                                                                                                                                                                 |
| UL Listing              | UL listed per UL1598 and CSA 22.2 No. 250.0 for the United States and Canada. Suitable for Wet Locations.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Electronic Driver       | The LED driver is UL recognized and will be securely mounted inside the fixture, for optimized performance and longevity. It will be supplied with a quick-disconnect electrical connector on the power supply, providing easy power connections for fixture installation and maintenance. It will have DC voltage output and be a constant current design. It runs at 50/60HZ and will have overload, overheat, and short circuit protection. It will be supplied with a supplemental line-ground, line-neutral and neutral-ground electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines. It will be a high efficiency driver with a THD less than 20% and a high-power factor greater than .9. It will be dimming capable using a 0-10V signal, consult factory for more information. |
| Finish                  | Our 6 Stage Polyester Powder coat paint system offers a beautiful high-end finish that holds up to even the most extreme environments. Each part is inspected for quality and consistency before being released for shipment.<br>Our system exceeds AAMA 2604, AAMA 2605, ASTM D523 and ASTM D4214 requirements.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Traditional Finish      | Traditional paint finishes are available in Sternberg Lighting's Traditional product line. A range of colors help accent the decorative elements on the product. Finishes are available in textured or smooth.<br>Available finishes include: <b>Black, White, Park Green, Architectural Medium Bronze and Dark Bronze</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Sternberg Select Finish | The Sternberg Select antique-inspired palette adds a touch of vintage elegance to modern applications.<br><b>Old World Gray Textured</b> is a 1 part powder coat with metallic flakes.<br><b>Verde Green and Swedish Iron</b> is a 2 part finish that includes a powder coat base coat with a hand applied antique top coat. The top coat is unique to each application and changes over time.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Custom Finish           | Custom finishes are offered to adapt to any application.<br><b>Rust, Weathered Brown and Cedar</b> are special 1 part powder coat finishes with a distinctive look.<br><b>Old Iron and Weathered Black</b> are 2 part finishes that includes a powder coat base coat with a hand applied antique top coat. The top coat is unique to each application and changes over time.<br><b>Two-Tone and Custom Match</b> options are available to blend Sternberg product with the site, consult factory for more information.                                                                                                                                                                                                                                                                                         |
| Warranty                | 7-year limited warranty. See Website for Terms and Conditions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |




|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LEDs                                | <p>The LEDs in this system will be fully shielded in a direct downward position to maximize efficiency.</p> <p>The LEDs are mounted to maximize thermal transfer to the heat sink surface. The LEDs shall be 100% recyclable; not contain lead, mercury or any other hazardous substances and shall be RoHS compliant. Lumen maintenance shall be determined in accordance with IESNA TM-21, based on LED manufacturer LM-80 test data of no less than 6,000 hours and in-situ testing of the luminaire by an NVLAP accredited Energy Efficient Lighting Products lab. The high-performance white LEDs will have a predicted lumen depreciation of approximately 100,000 hours with greater than 70% of initial output at 25°C. The high brightness, high-output white LEDs shall be 4000K nominal (2700K, 3000K, 3500K or 5000K optional) correlated color temperature (CCT) with a 70 (minimum) color rendering index (CRI). Consult factory for custom CCT or CRI. The luminaire shall have a minimum _____ (see table) delivered initial lumens when operated at steady state with an average ambient temperature of 25°C (77°F).</p> <p><b>CCT Lumen Derate Values from 4,000K</b></p> <p>2,700K (70+ CRI)=<b>.92</b></p> <p>3,000K (70+ CRI)=<b>.95</b></p> <p>3,500K (70+ CRI)=<b>1.03</b></p> <p>5,000K (70+ CRI)=<b>1.00</b></p> |
| Optics                              | <p>The luminaire shall be provided with individual, refractor type optics applied to each LED. The luminaire shall provide Type ____ (2, 3, 4 or 5) light distribution per the IESNA classifications. Testing shall be done in accordance with IESNA LM-79.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Backlight Optical Control           | <p><b>BLOC Optic (BLOC):</b> An optional "Back Light Optical Control" shield can be provided at the factory. This is an internal optic level "House Side Shield" offering significantly reduced backlight and glare while maintaining the original design aesthetics of the luminaire.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Fixed Dimming Resistor Board (FDRB) | <p>Optional numbered 10-step selector switch allows for fine adjustment of the light levels in the field, repeatable from location to location. Offers dimming from 25% to 100% of the original output. Enclosure is composite material, sealed to protect components for the life of the product.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Photocontrols                       | <p><b>Button Photocell:</b> The photocontrol shall be mounted on the fixture and pre-wired to driver. The electronic button type photocontrol is instant on and will turn on at 1.5 footcandles and will turn off at 2-3 footcandles. See pole spec sheet for pole mounted version.</p> <p><b>Twist-Lock Style (Roof Mount):</b> The photocontrol shall be mounted on the roof and prewired to driver. The twist lock type photocontrol is instant on with a 3-6 second turn off, and shall turn on at 1.5 footcandles with a turnoff at 2-3 footcandles. Photocontrol is 120-277 volt.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Lumen Chart(s)

Tested with CSA lens

| Model #          | T2<br>DELIVERED<br>LUMENS | BUG    | EFFICACY<br>(LPW) | T3<br>DELIVERED<br>LUMENS | BUG    | EFFICACY<br>(LPW) | T4<br>DELIVERED<br>LUMENS | BUG    | EFFICACY<br>(LPW) | T5<br>DELIVERED<br>LUMENS | BUG    | EFFICACY<br>(LPW) | WATTAGE |
|------------------|---------------------------|--------|-------------------|---------------------------|--------|-------------------|---------------------------|--------|-------------------|---------------------------|--------|-------------------|---------|
| 32L-40-T_-MDL012 | 8420                      | B2U2G2 | 85.9              | 8875                      | B3U2G3 | 90.6              | 9065                      | B2U2G2 | 92.5              | 9405                      | B3U2G1 | 96.0              | 98      |
| 32L-30-T_-MDL012 | 8030                      | B2U2G2 | 81.9              | 8460                      | B3U2G3 | 86.3              | 8645                      | B2U2G2 | 88.2              | 8965                      | B3U2G1 | 91.5              | 98      |
| 32L-27-T_-MDL012 | 7765                      | B2U2G2 | 79.2              | 8185                      | B3U2G3 | 83.5              | 8360                      | B2U2G2 | 85.3              | 8675                      | B3U2G1 | 88.5              | 98      |
| 32L-40-T_-MDL010 | 7250                      | B2U2G2 | 89.5              | 7625                      | B2U2G2 | 94.1              | 7785                      | B2U2G2 | 96.1              | 8145                      | B3U2G1 | 100.6             | 81      |
| 32L-30-T_-MDL010 | 6915                      | B2U2G2 | 85.4              | 7270                      | B2U2G2 | 89.8              | 7425                      | B2U2G2 | 91.7              | 7765                      | B3U2G1 | 95.9              | 81      |
| 32L-27-T_-MDL010 | 6690                      | B2U2G2 | 82.6              | 7035                      | B2U2G2 | 86.9              | 7180                      | B2U2G2 | 88.6              | 7515                      | B3U2G1 | 92.8              | 81      |
| 32L-40-T_-MDL008 | 5835                      | B2U2G2 | 92.6              | 6145                      | B2U2G2 | 97.5              | 6280                      | B2U2G2 | 99.7              | 6520                      | B3U2G1 | 103.5             | 63      |
| 32L-30-T_-MDL008 | 5565                      | B2U2G2 | 88.3              | 5860                      | B2U2G2 | 93.0              | 5990                      | B2U2G2 | 95.1              | 6215                      | B3U2G1 | 98.7              | 63      |
| 32L-27-T_-MDL008 | 5380                      | B2U2G2 | 85.4              | 5670                      | B2U2G2 | 90.0              | 5795                      | B2U2G2 | 92.0              | 6015                      | B3U2G1 | 95.5              | 63      |
| 24L-40-T_-MDL008 | 4470                      | B1U2G1 | 91.2              | 4670                      | B2U2G2 | 95.3              | 4810                      | B1U2G1 | 98.2              | 4970                      | B2U1G1 | 101.4             | 49      |
| 24L-30-T_-MDL008 | 4260                      | B1U2G1 | 86.9              | 4455                      | B2U2G2 | 90.9              | 4585                      | B1U2G1 | 93.6              | 4740                      | B2U1G1 | 96.7              | 49      |
| 24L-27-T_-MDL008 | 4125                      | B1U2G1 | 84.2              | 4310                      | B2U2G2 | 88.0              | 4435                      | B1U2G1 | 90.5              | 4585                      | B2U1G1 | 93.6              | 49      |
| 12L-40-T_-MDL014 | 3775                      | B1U2G1 | 83.9              | 3860                      | B1U1G1 | 85.8              | 3895                      | B1U1G1 | 86.6              | 4065                      | B2U1G1 | 90.3              | 45      |
| 12L-30-T_-MDL014 | 3600                      | B1U2G1 | 80.0              | 3680                      | B1U1G1 | 81.8              | 3715                      | B1U1G1 | 82.6              | 3875                      | B2U1G1 | 86.1              | 45      |
| 12L-27-T_-MDL014 | 3480                      | B1U2G1 | 77.3              | 3560                      | B1U1G1 | 79.1              | 3595                      | B1U1G1 | 79.9              | 3750                      | B2U1G1 | 83.3              | 45      |
| 12L-40-T_-MDL008 | 2320                      | B1U1G1 | 85.9              | 2395                      | B1U1G1 | 88.7              | 2390                      | B1U1G1 | 88.5              | 2515                      | B1U1G1 | 93.1              | 27      |
| 12L-30-T_-MDL008 | 2210                      | B1U1G1 | 81.9              | 2285                      | B1U1G1 | 84.6              | 2280                      | B1U1G1 | 84.4              | 2400                      | B1U1G1 | 88.9              | 27      |
| 12L-27-T_-MDL008 | 2140                      | B1U1G1 | 79.3              | 2210                      | B1U1G1 | 81.9              | 2205                      | B1U1G1 | 81.7              | 2320                      | B1U1G1 | 85.9              | 27      |

Dimensions

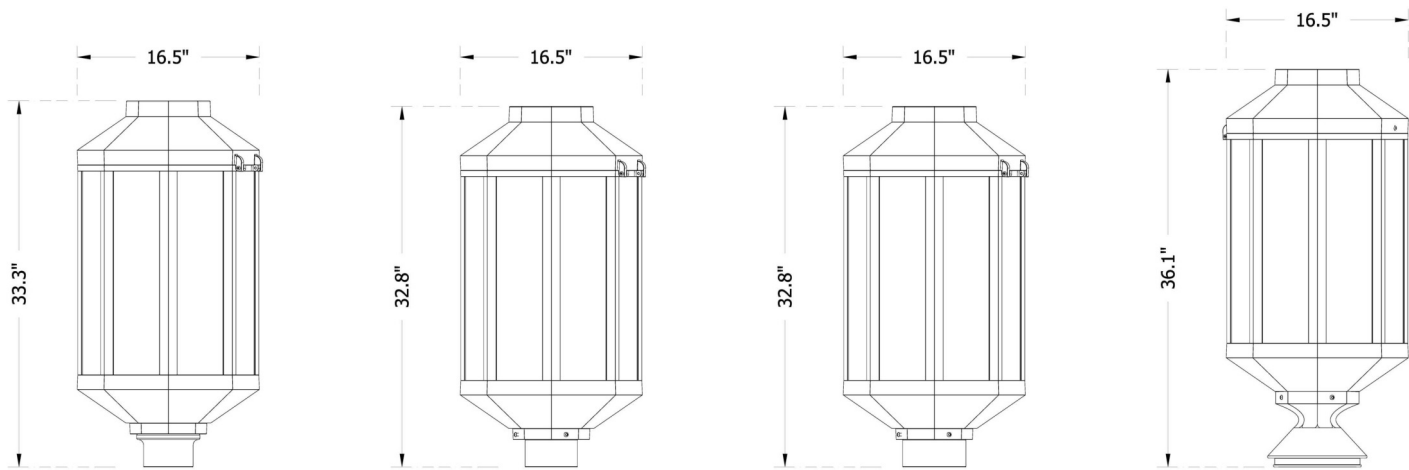


**"3" FITTER**  
Fits 3" OD x 3" tall tenon/pole

**"4" FITTER**  
Fits 4" OD x 3" tall tenon/pole


**"5" FITTER**  
Fits 5" OD x 3" tall tenon/pole

**"7" FITTER**  
Fits 7" OD x 1" tall tenon/pole

Options



7-Pin NEMA Twist-Lock Receptacle  
(R7)



Button Photocell (PEC/PEC4)



Fixed Dimming Resistor Board (FDRB)



Double Fuse Holder & (2) 3A Fuses  
(FHD)