


Project Name

Qty

Type

Catalog / Part Number

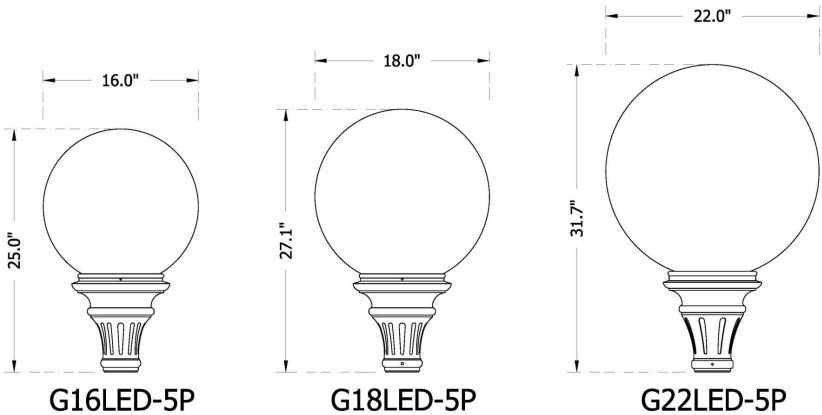

7 Year Warranty

Description

The decorative fitter LED Globe is a classic fixture style provided with an acrylic globe and a cast aluminum fitter in a variety of styles. The white, red, blue or frosted globes are available in sizes from 16" to 24".

Mounting Configuration					EPA: .87-1.93 (ft²) WEIGHT: 20-40 LBS	
					Features	
Wall Mount	Post Top	1 Arm Mount	1 Arm & Post Top	2 Arm Mount @ 180°	Mounting Configuration	
					1W: Wall Mount	PT: Post Top
2 Arm Mount @ 90°	2 Arm @ 180° & Post Top	3 Arms @ 120°	3 Arms @ 90°	3 Arm @ 120° & Post Top	1A: 1 Arm Mount	1APT: 1 Arm & Post Top
					2A: 2 Arm Mount @ 180°	2A90: 2 Arm Mount @ 90°
4 Arms @ 90°	4 Arm @ 90° & Post Top	1 Arm Mid-Mount	2 Arm Mid-Mount @ 180°	Pier Base	2APT: 2 Arm @ 180° & Post Top	3A: 3 Arms @ 120°
					3A90: 3 Arms @ 90°	4A: 4 Arms @ 90°
Stem Hung	Chain Hung	Catenary			3APT: 3 Arm @ 120° & Post Top	4APT: 4 Arm @ 90° & Post Top
					1AM: 1 Arm Mid-Mount	2AM: 2 Arm Mid-Mount @ 180°
					450PB: Pier Base	SH44: Stem Hung
					CH44: Chain Hung	CAT: Catenary
Optional Control Receptacle					R7: 7-Pin control receptacle only	
Optional Control					PE: Twist-Lock Photocontrol (120V-277V) PE4: Twist-Lock Photocontrol (347V-480V) SC: Shorting Cap PEC: Electronic Button Photocontrol (120V-277V) PEC4: Electronic Button Photocontrol (480V)	
Optional Fuse					FHD: Double Fuse and Holder	
Optional Hangstraight					HSBS: Standard Horizontal Hangstraight, Spike Finial HSBN: Standard Horizontal Hangstraight, No Finial HSBB: Standard Horizontal Hangstraight, Ball Finial EZ: Vertical Hangstraight, Large, "EZ" Mount	
Optional Fixed Dimming Resistor Board					FDRB: Fixed Dimming Resistor Board	

2 Arm Mount @ 90°2 Arm @ 180° & Post Top3 Arms @ 120°3 Arms @ 90°3 Arm @ 120° & Post Top4 Arms @ 90°4 Arm @ 90° & Post Top1 Arm Mid-Mount2 Arm Mid-Mount @ 180°Pier BaseStem HungChain HungCatenary

Finish


Black
Textured


White
Textured


Park
Green
Textured


Arch
Med
Bronze
Tex


Dark
Bronze
Textured


Verde
Green


Swedish
Iron


Old
World
Gray
Tex


Old
Iron


Rust


Weathered
Cedar
Brown


Weathered
Black


Two
Tone


Custom
Match

CCT - Color Temp (K)


2,700K


3,000K


3,500K


4,000K


5,000K

Distribution Type


Type
Symmetric

Lens


White
Acrylic


Red
Acrylic


Blue
Acrylic


Frosted
Acrylic

Certifications



Physical		
Fixture	G16LED: 16" Diameter Globe	
	G16LEDH: 16" Diameter Globe, Hanging	
	G18LED: 18" Diameter Globe	
	G18LEDH: 18" Diameter Globe, Hanging	
	G20LED: 20" Diameter Globe	
	G20LEDH: 20" Diameter Globe, Hanging	
	G22LED: 22" Diameter Globe	
	G22LEDH: 22" Diameter Globe, Hanging	
	G24LED: 24" Diameter Globe	
	G24LEDH: 24" Diameter Globe, Hanging	
Fitter	5P: Slip fit 3" OD x 3" tall tenon/pole	
	73: Slip fit 3" OD x 4" tall tenon/pole	
	74: Slip fit 4" OD x 4" tall tenon/pole	
	990: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole	
	991: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole	
	992: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole	
	993: Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole	
	994: Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole	
	995: Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole	
	BD4: Slip fit 4" OD x 5" tall tenon/pole	
	BD5: Slip fit 5" OD x 6" tall tenon/pole	
	BD7: Slip fit 7" OD x 1" tall tenon/pole	
	OL3: Oak-Leaf, Slip fit 3" OD x 3" tall tenon/pole	
	OL4: Oak-Leaf, Slip fit 4" OD x 3" tall tenon/pole	
	588: Art-Deco, Slip fit 3" OD x 3" tall tenon/pole	
	C2097: Low-Profile, Slip fit 7" OD x 1" tall tenon/pole	
Optional Twist Lock Globe		T: Twist-Lock Option for Globe
Lens	WA: White Acrylic	RA: Red Acrylic
	BA: Blue Acrylic	FA: Frosted Acrylic
Optional Receptacle		GFI: 120V, 15A Duplex GFI for Utility Fitter
Optional Vinyl Lettering	VLP: Vinyl Lettering, "Police"	VLF: Vinyl Lettering, "Fire"
	VLC: Vinyl Lettering, custom	
Finish	BKT: Black Textured	WHT: White Textured
	PGT: Park Green Textured	ABZT: Arch Med Bronze Tex
	DBT: Dark Bronze Textured	VG: Verde Green
	SI: Swedish Iron	OWGT: Old World Gray Tex
	OI: Old Iron	RT: Rust
	WBR: Weathered Brown	CD: Cedar
	WBK: Weathered Black	TT: Two Tone
	CM: Custom Match	
Light Source		
CCT - Color Temp (K)	27: 2,700K	30: 3,000K
	35: 3,500K	40: 4,000K
	50: 5,000K	
Distribution Type		TS: Type Symmetric
Electrical and control		
Driver	MDL01: 120V-277V, 160mA	MDH01: 347V-480V, 160mA
	MDL02: 120V-277V, 250mA	MDH02: 347V-480V, 250mA
	MDL03: 120V-277V, 350mA	MDH03: 347V-480V, 350mA
	MDL05: 120V-277V, 500mA	MDH05: 347V-480V, 500mA

How to Order

Mounting Configuration ⁽¹⁾	Overall Drop Length (In Inches) ⁽⁸⁾ ⁽⁹⁾	Fixture	Fitter ⁽¹⁾	Optional Twist Lock Globe	LED	CCT - Color Temp (K)	Distribution Type	Driver	Lens
1W Wall Mount PT Post Top ⁽²⁾ 1A 1 Arm Mount 1APT 1 Arm & Post Top ⁽²⁾ 2A 2 Arm Mount @ 180° 2A90 2 Arm Mount @ 90° 2APT 2 Arm @ 180° & Post Top ⁽²⁾ 3A 3 Arms @ 120° ⁽³⁾ 3A90 3 Arms @ 90° 3APT 3 Arm @ 120° & Post Top ⁽²⁾ ⁽³⁾ 4A 4 Arms @ 90° 4APT 4 Arm @ 90° & Post Top ⁽²⁾ 1AM 1 Arm Mid-Mount 2AM 2 Arm Mid-Mount @180° 450PB Pier Base ⁽²⁾ ⁽⁴⁾ SH44 Stem Hung ⁽⁵⁾ ⁽⁶⁾ CH44 Chain Hung ⁽⁵⁾ ⁽⁶⁾ CAT Catenary ⁽⁵⁾ ⁽⁶⁾ ⁽⁷⁾		G16LED 16" Diameter Globe G16LEDH 16" Diameter Globe, Hanging ⁽⁶⁾ G18LED 18" Diameter Globe G18LEDH 18" Diameter Globe, Hanging ⁽⁶⁾ G20LED 20" Diameter Globe G20LEDH 20" Diameter Globe, Hanging ⁽⁶⁾ G22LED 22" Diameter Globe G22LEDH 22" Diameter Globe, Hanging ⁽⁶⁾ G24LED 24" Diameter Globe G24LEDH 24" Diameter Globe, Hanging ⁽⁶⁾	5P Slip fit 3" OD x 3" tall tenon/pole ⁽¹⁰⁾ 73 Slip fit 3" OD x 4" tall tenon/pole 74 Slip fit 4" OD x 4" tall tenon/pole 990 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole ⁽¹⁰⁾ 991 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole ⁽¹⁰⁾ 992 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole ⁽¹⁰⁾ 993 Utility-Fitter, Slip fit 3" OD x 3" tall tenon/pole ⁽¹⁰⁾ 994 Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole ⁽¹⁰⁾ 995 Utility-Fitter, Slip fit 4" OD x 3" tall tenon/pole ⁽¹⁰⁾ BD4 Slip fit 4" OD x 5" tall tenon/pole BD5 Slip fit 5" OD x 6" tall tenon/pole BD7 Slip fit 7" OD x 1" tall tenon/pole OL3 Oak-Leaf, Slip fit 3" OD x 3" tall tenon/pole OL4 Oak-Leaf, Slip fit 4" OD x 3" tall tenon/pole 588 Art-Deco, Slip fit 3" OD x 3" tall tenon/pole C2097 Low-Profile, Slip fit 7" OD x 1" tall tenon/pole ⁽¹⁰⁾ ⁽¹¹⁾	T Twist-Lock Option for Globe	VCOB-4L 4 LEDs	27 2,700K 30 3,000K 35 3,500K 40 4,000K 50 5,000K	TS Type Symmetric	MDL01 120V-277V, 160mA MDH01 347V-480V, 160mA MDL02 120V-277V, 250mA MDH02 347V-480V, 250mA MDL03 120V-277V, 350mA MDH03 347V-480V, 350mA MDL05 120V-277V, 500mA MDH05 347V-480V, 500mA	WA White Acrylic RA Red Acrylic BA Blue Acrylic FA Frosted Acrylic

Notes:

1. Use 3" fitter for arm applications.

2. For use with Post Top fixture only.

3. Only available with a round profile pole.

4. For use with 3" fitters only

5. For use with hanging (H) fixture only.

6. For use with (5P) fitter only.

7. Requires EZ hang-straight.

8. Required field for Stem or Chain Mounting Configuration.

9. Minimum 36" Overall Drop Length.

10. Fitter available with "Twist-lock" acorn option

11. Not for use with button photocell

How to Order

Optional Control Receptacle ⁽¹²⁾ ⁽¹³⁾ ⁽¹⁴⁾ ⁽¹⁵⁾	Optional Control	Optional Fuse ⁽¹⁸⁾	Optional Terminal Block ⁽¹⁹⁾	Optional Receptacle ⁽¹⁹⁾ ⁽²⁰⁾	Optional Hangstraight ⁽⁵⁾	Optional Fixed Dimming Resistor Board ⁽¹⁷⁾	Optional Vinyl Lettering	Finish
R7 7-Pin control receptacle only	PE Twist-Lock Photocontrol (120V-277V) ⁽¹⁴⁾ PE4 Twist-Lock Photocontrol (347V-480V) ⁽¹⁴⁾ SC Shorting Cap ⁽¹⁴⁾ PEC Electronic Button Photocontrol (120V-277V) ⁽¹⁷⁾ PEC4 Electronic Button Photocontrol (480V) ⁽¹⁷⁾	FHD Double Fuse and Holder	TB Terminal Block	GFI 120V, 15A Duplex GFI for Utility Fitter	HSHS Standard Horizontal Hangstraight, Spike Finial HSHN Standard Horizontal Hangstraight, No Finial HSHB Standard Horizontal Hangstraight, Ball Finial EZ Vertical Hangstraight, Large, "EZ" Mount ⁽¹⁷⁾	FDRB Fixed Dimming Resistor Board	VLP Vinyl Lettering, "Police" VLF Vinyl Lettering, "Fire" VLC Vinyl Lettering, custom	BKT Black Textured ⁽²¹⁾ WHT White Textured ⁽²¹⁾ PGT Park Green Textured ⁽²¹⁾ ABZT Arch Med Bronze Tex ⁽²¹⁾ DBT Dark Bronze Textured ⁽²¹⁾ VG Verde Green SI Swedish Iron OWGT Old World Gray Tex OI Old Iron ⁽²²⁾ RT Rust ⁽²²⁾ WBR Weathered Brown ⁽²²⁾ CD Cedar ⁽²²⁾ WBK Weathered Black ⁽²²⁾ TT Two Tone ⁽²²⁾ CM Custom Match ⁽²²⁾

Notes:

5. For use with hanging (H) fixture only.

12. Not for use with FDRB.

13. Not for use with STEM, CHAIN, CAT, or EZ mounting style.

14. For use with 900 series fitter or HORIZONTAL hangstraight only

15. See specifications section for more info on compatibility with wireless controllers

16. Requires control receptacle.
17. Not for use with R7.

18. Ships loose for installation in base.

19. For 900 series utility fitter only.

20. For use with MDLxx driver only.

21. Smooth finishes are available upon request.

22. Custom colors require upcharge.

Specifications

Available with Intellistreets® Technology	Intellistreets® is an integrated set of solutions offering the capability to see, hear, and record what's happening on your streets, through both cameras and audio sensors.
Fitter	The sand cast fitter is a heavy wall, low-copper aluminum 356 alloy for enhanced corrosion resistance and high tensile strength. It will have an 8-1/2" inside diameter opening to attach to the 8" neck of the lens. It includes 4 stainless steel Allen-head set screws for attachment. The fitter will include a one-piece ring bug gasket to resist insect penetration. Utility Fitter: The die-cast fitter shall be heavy wall, low-copper 360 aluminum alloy for enhanced corrosion resistance and high tensile strength. It shall have a hinged, tool-less entry door that provides open access to all components. The 900 series shall have an optional terminal block for ease of wiring, an optional Twist-Lock Photocontrol receptacle, an optional single GFCI outlet for auxiliary power needs. The top mounted driver mounting plate will provide tool-less removal from the housing using 2 finger latches. The fitter shall have a one-piece ring gasket to resist insect penetration into globe assembly. When supplied with GFCI receptacle a hole will be provided for cord and plug installation with the access door closed. When cord and plug is not in use a filler plug will be provided and shall be tethered to the fitter for easy recovery and installation. Twist Lock Option: The TL (Twist-Lock) fitter will have a die-cast aluminum twist-lock mechanism. The tool-less, quarter turn action allows for easy acorn/globe removal and replacement. The twist-lock mechanism is mechanically attached to the globe and is removable if the globe is broken or needs replacing.
Hang-Straight	A hang-straight transition is required for most hanging mounting configurations. The Standard (HSHx) is an aluminum ball and swivel horizontal hang-straight. Available with a spike (S), a ball (B), or no finial (N). The hang-straight slips a 4" long by 2-3/8" OD horizontal tenon. The (EZ) is a cast stainless steel ball and swivel vertical hang-straight. The special 2-part design allows for easy installation. It is factory installed under an arm and on the fixture.
Catenary Mount	The Catenary mount option includes a cast aluminum span wire clamp, which accommodates cables 1/4"-5/8" in diameter. Below the clamp is a decorative cast aluminum wire box and cover which transitions to the EZ vertical Hangstraight for fixture attachment. Aircraft Cable by others.
Hardware	Includes Stainless steel hardware. Most finishes will include hardware with a Black Oxide conversion coating. Light finishes will get non-color coated hardware (Whites and Silvers)
Globe	Acrylic globes offered in White, Frosted, translucent Red and translucent Blue. Available in sizes from 16" to 24", all globes include an 8" aluminum neck for attachment to the decorative fitter.
Vinyl Lettering	Optional factory installed vinyl letter stenciling uses high quality outdoor rated material. Standard options include "Fire" or "Police" with custom lettering also available. White lettering standard on Blue and Red globes. Black lettering standard on White and Frosted globes
UL Listing	UL listed per UL1598 and CSA 22.2 No. 250.0 for the United States and Canada. Suitable for Wet Locations.
Electronic Driver	The LED driver is UL recognized and will be securely mounted inside the fixture, for optimized performance and longevity. It will be supplied with a quick-disconnect electrical connector on the power supply, providing easy power connections for fixture installation and maintenance. It will have DC voltage output and be a constant current design. It runs at 50/60HZ and will have overload, overheat, and short circuit protection. It will be supplied with a supplemental line-ground, line-neutral and neutral-ground electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines. It will be a high efficiency driver with a THD less than 20% and a high-power factor greater than .9. It will be dimming capable using a 0-10V signal, consult factory for more information.
Finish	Our 6 Stage Polyester Powder coat paint system offers a beautiful high-end finish that holds up to even the most extreme environments. Each part is inspected for quality and consistency before being released for shipment. Our system exceeds AAMA 2604, AAMA 2605, ASTM D523 and ASTM D4214 requirements.
Traditional Finish	Traditional paint finishes are available in Sternberg Lighting's Traditional product line. A range of colors help accent the decorative elements on the product. Finishes are available in textured or smooth. Available finishes include: Black, White, Park Green, Architectural Medium Bronze and Dark Bronze

Sternberg Select Finish	The Sternberg Select antique-inspired palette adds a touch of vintage elegance to modern applications. Old World Gray Textured is a 1 part powder coat with metallic flakes. Verde Green and Swedish Iron is a 2 part finish that includes a powder coat base coat with a hand applied antique top coat. The top coat is unique to each application and changes over time.
Custom Finish	Custom finishes are offered to adapt to any application. Rust, Weathered Brown and Cedar are special 1 part powder coat finishes with a distinctive look. Old Iron and Weathered Black are 2 part finishes that includes a powder coat base coat with a hand applied antique top coat. The top coat is unique to each application and changes over time. Two-Tone and Custom Match options are available to blend Sternberg product with the site, consult factory for more information.
Warranty	7-year limited warranty. See Website for Terms and Conditions.
LEDs	The LEDs in this system will be mounted vertically. They fully illuminate the luminaire and allow some up-light for vertical illumination. The luminaire shall use high output, high brightness LEDs, consisting of a two piece assembly complete with Chip on Board (COB) LED component and COB holder frame. The LEDs shall be 100% recyclable; not contain lead, mercury or any other hazardous substances and shall be RoHS compliant. Lumen maintenance shall be determined in accordance with IESNA TM-21, based on LED manufacturer LM-80 test data of no less than 6,000 hours and in-situ testing of the luminaire by an NVLAP accredited Energy Efficient Lighting Products lab. The high performance white LED's will have a predicted lumen depreciation of approximately 100,000 hours with greater than 70% of initial output at 25°C. The High Brightness, High Output LEDs shall be 4000K (2700K, 3000K, 3500K or 5000K option) correlated color temperature (CCT) with a 70 (minimum) color rendering index (CRI). Consult factory for custom color CCT. The luminaire shall have a minimum _____ (see table) delivered initial lumen rating when operated at steady state with an average ambient temperature of 25°C (77°F). CCT Lumen Derate Values from 4,000K 2,700K (80+ CRI)=.88 3,000K (70+ CRI)=.97 3,500K (80+ CRI)=.93 5,000K (70+ CRI)=1.01
Fixed Dimming Resistor Board (FDRB)	Optional numbered 10-step selector switch allows for fine adjustment of the light levels in the field, repeatable from location to location. Offers dimming from 25% to 100% of the original output. Enclosure is composite material, sealed to protect components for the life of the product.
Photocontrols	Button Photocell: The photocontrol shall be mounted on the fixture and pre-wired to driver. The electronic button type photocontrol is instant on and will turn on at 1.5 footcandles and will turn off at 2-3 footcandles. See pole spec sheet for pole mounted version. Twist-Lock Style (Hangstraight Mount): The photocontrol shall be mounted externally on the hangstraight and pre-wired to driver. The twist lock type photocontrol is instant on with a 3-6 second turn off, and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. If an R7 is specified alongside a BALL or SPIKE style finial on hang-straight, a decorative cap (with window) is included to cover a STANDARD photocell. Use the NO FINIAL hangstraight option if the R7 is used with a WIRELESS CONTROLLER. Twist-Lock Style (Utility Fitter): The photocontrol shall be mounted in the utility fitter and prewired to driver. Utility fitter includes acrylic window to read ambient light levels. The twist lock type photocontrol is instant on with a 3-6 second turn off, and shall turn on at 1.5 footcandles with a turnoff at 2-3 footcandles. Photocontrol is 120-277 volt and warranted for 6 years. For use with standard photocells only, not for use with a wireless network controller.
Terminal Block	Requires Utility Fitter Optional 4-wire dual row terminal block. Includes #8-32 pan head screws. For use wire sizes 14-6 AWG. Component is UL recognized for 65A.

Hangstraight

Horizontal Hang-straight's slip fit 4" long by 2-3/8" OD horizontal tenon



Standard Horizontal Hangstraight, Spike Finial (HSHS)



Standard Horizontal Hangstraight, Ball Finial (HSHB)



Standard Horizontal Hangstraight, No Finial (HSHN)



"EZ" Vertical hangstraight (EZ)

Options



Fixed Dimming Resistor Board (FDRB)



Button Photocell (PEC)




Red Globe with "Fire" vinyl letter stencil (VLF)

Lumen Chart(s)


Tested with WA lens

Model #	DELIVERED LUMENS	BUG	EFFICACY (LPW)	WATTAGE
4L-40-TS-MDL05	8800	B2U5G3	104.8	84
4L-30-TS-MDL05	8525	B2U5G3	101.5	84
4L-27-TS-MDL05	7750	B2U5G3	92.3	84
4L-40-TS-MDL03	6135	B2U5G3	113.6	54
4L-30-TS-MDL03	5940	B2U5G3	110.0	54
4L-27-TS-MDL03	5400	B2U5G3	100.0	54
4L-40-TS-MDL02	4300	B1U5G2	118.2	37
4L-30-TS-MDL02	4185	B1U5G2	112.8	37
4L-27-TS-MDL02	3785	B1U5G2	102.3	37
4L-40-TS-MDL01	3080	B1U5G2	114.1	27
4L-30-TS-MDL01	2985	B1U5G2	110.6	27
4L-27-TS-MDL01	2710	B1U5G2	100.4	27


Dimensions

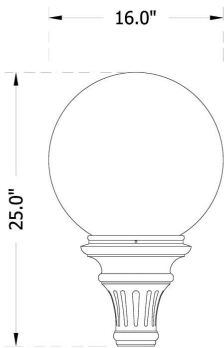


16" Globe, "5P" Fitter

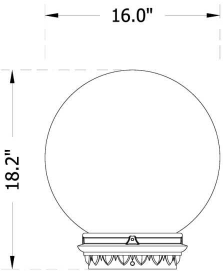


16" Globe, "C2097" Fitter

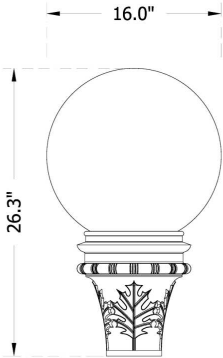


16" Globe, "OL3" Fitter

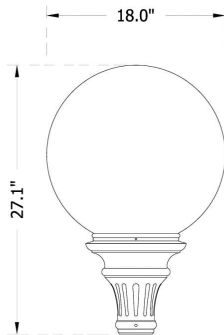


18" Globe, "5P" Fitter

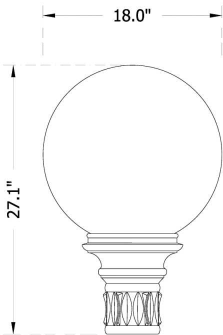


18" Globe, "BD4" Fitter

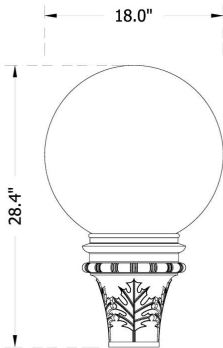


18" Globe, "OL3" Fitter

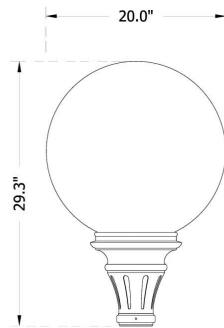


20" Globe, "5P" Fitter

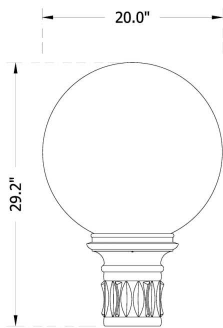


20" Globe, "BD5" Fitter

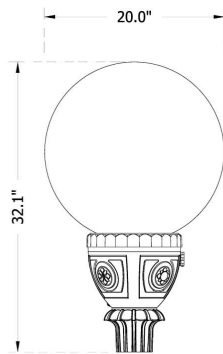


20" Globe, "992" Fitter

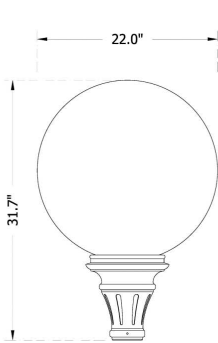


22" Globe, "5P" Fitter




22" Globe, "73" Fitter

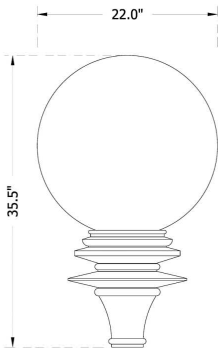


22" Globe, "588" Fitter

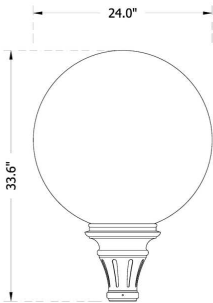


24" Globe, "5P" Fitter

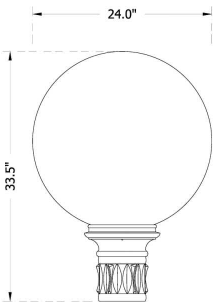


24" Globe, "BD5" Fitter




24" Globe, "993" Fitter

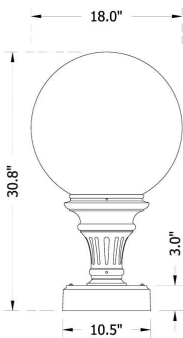

Pier Base (450PB)
18" Globe, "5P" Fitter

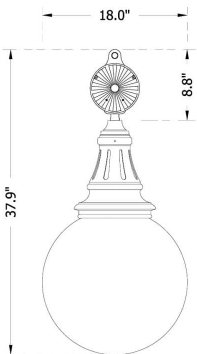

Catenary Mount (CAT)
18" Globe, "5P" Fitter

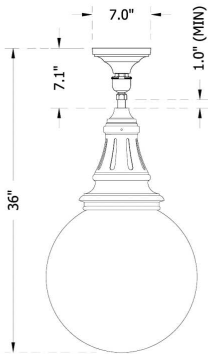

Stem Hung (SH44)
18" Globe, "5P" Fitter

Fitters



5P Fitter
10-1/8" W x 10-3/8" H
Fits 3" OD x 3" tall tenon/pole



BD4 Fitter
10-1/8" W x 10-1/8" H
Fits 4" OD x 5" tall tenon/pole



BD5 Fitter
10-1/8" W x 10-1/4" H
Fits 5" OD x 6" tall tenon/pole



BD7 Fitter
10-1/8" W x 11-3/4" H
Fits 7" OD x 1" tall tenon/pole



588 Fitter
14-1/2" W x 14-1/4" H
Fits 3" OD x 3" tall tenon/pole



C2097 Fitter
10" W x 3-1/4" H
Fits 7" OD x 1" tall tenon/pole



992 Utility Fitter
10-1/2" W x 13-1/8" H
Fits 3" OD x 3" tall tenon/pole



991 Utility Fitter
10-1/2" W x 13-1/8" H
Fits 3" OD x 3" tall tenon/pole



OL3 (or OL4) Fitter
10-1/8" W x 10-3/8" H
Fits 3" (or 4") OD x 3" tall tenon/pole



990 (or 994) Utility Fitter
10-1/2" W x 15-3/4" H
Fits 3" (or 4") OD x 3" tall tenon/pole



993 (or 995) Utility Fitter
10-1/2" W x 15-3/4" H
Fits 3" (or 4") OD x 3" tall tenon/pole



73 (or 74) Fitter
9-3/4" W x 13-1/4" H
Fits 3" (or 4") OD x 4" tall tenon/pole

Utility Fitter Details

Optional Accessories

990 Utility Fitter

