





ENERGY-SAVING DESKTOP UPS



The energy-saving technology saves up to 70% of UPS power consumption

Ideal for home and office applications, the BU Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design helps UPS achieve ultra-low power consumption to reduce energy costs. The UPSs also feature overload protection and configurable alarm to safeguard your devices. The desktop design allows users to place it easily on desks or other tight spaces.


NOTE: Power consumption of the UPS systems where energy-saving technology is applied may vary by model.

SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Automatic Voltage Regulation (AVR)
- Generator Compatible
- LED Status Indicator
- Overload Protection
- Surge and Spike Protection
- Wall Mount Installation
- EMI and RFI Filtration
- Configurable Alarm
- Fire-resistant Capability

PRODUCT CALLOUTS

- 1 . Power On Indicator
- 2 . Power On/Off Switch
- 3 . Battery Backup & Surge Protected Outlets
- 4 . AC Input Power Cord

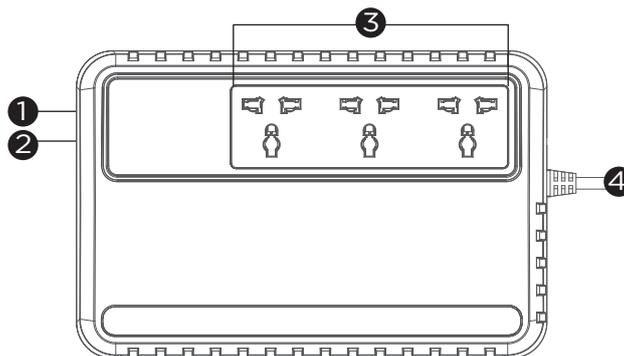

BU650/800E



TECHNICAL SPECIFICATIONS

Model Name	BU650E	BU800E
General		
UPS Topology	Line-interactive	
Energy Saving Technology	GreenPower UPS™ Bypass Technology	
Input		
Generator Compatibility	Yes	
Nominal Input Voltage (Vac)	220/230/240	
Input Voltage Range (Vac)	165 - 295	
Input Frequency (Hz)	50 ± 5, 60 ± 5	
Input Frequency Detection	Auto-sensing	
Rated Input Current (A)	2.95	3.48
Input Connector Type	NEMA 5-15P	
Output		
Capacity (VA)	650	800
Capacity (Watts)	360	480
On Battery Waveform	Simulated Sine Wave	
Nominal Output Voltage (Vac)	220/230/240	
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%	
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck	
Overload Protection	Internal Current Limiting	
Outlet(s) - Total	3	
Outlet Type	Universal x 3	
Outlet(s) - Battery & Surge Protected	3	
Typical Transfer Time (ms)	4	
Battery		
Runtime at 60W (min)	30	42
Runtime at 90W (min)	18	27
Typical Recharge Time (Hours)	8	
User-replaceable	No	
Battery Type	Sealed Lead-acid	
Surge Protection & Filtering		
Surge Suppression (Joules)	150	
EMI/RFI Filtration	Yes	
Management & Communications		
LED Indicators	Power On, Line Mode, Battery Mode, Low Battery	
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault	
Physical		
Form Factor	Desktop	
Physical Size - UPS Module		
Dimensions (WxHxD) (mm.)	158 x 91.5 x 240	
Weight (kg.)	3.9	4.1
Environmental		
Operating Temperature (°C)	0 - 40	
Operating Relative Humidity (Non-condensing) (%)	0 - 90	
Online Thermal Dissipation (BTU/hr)	44.3	
Certifications		
Certifications*	TISI	
RoHS	Yes	

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.

