



## Ci100S

### Standalone Card Time Attendance and Access Control System

เครื่องควบคุมการเปิด-ปิดประตูด้วยบัตร โดยที่ทำงานในระบบ Standalone รองรับบัตรได้ 50,000 ใบ



**50,000**  
Card



**50,000**  
Password



**Access**  
Control



**USB**  
Drive



**Linux**  
Operating  
System





### Features

- Standalone Access Control
- 2.4" TFT Graphic Interface
- 50,000 Card
- 160,000 Record
- Password / Card / Card+Password
- TCP/IP, USB Link, U disk download, Wiegand in/out, RS485
- ID Card 125 kHz/ MF Card 13.56 MHz (Option)

ขอสงวนลิขสิทธิ์ในการเปลี่ยนแปลงรายละเอียดทั้งหมดโดยไม่ต้องแจ้งให้ทราบล่วงหน้าโดย บริษัท เอช ไอ พี โกลบอล จำกัด.

## Installation Diagram Standalone

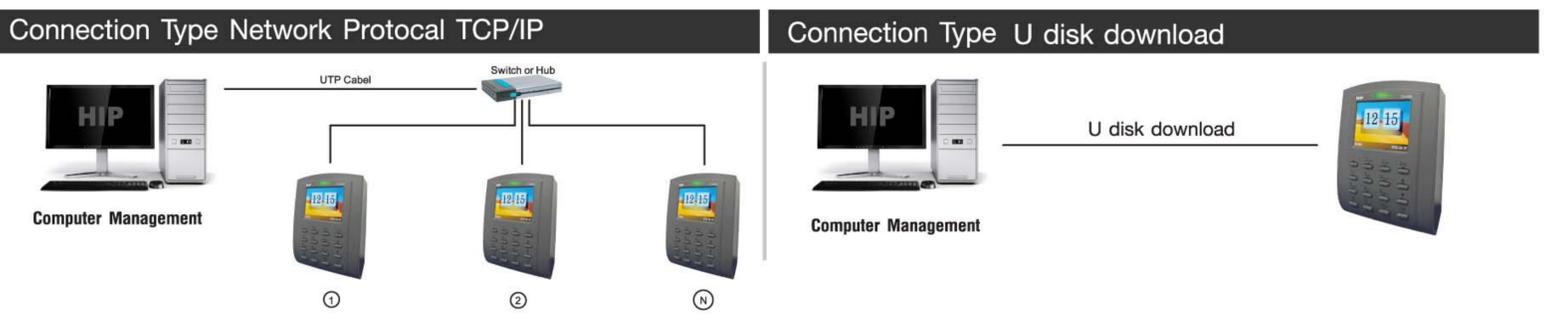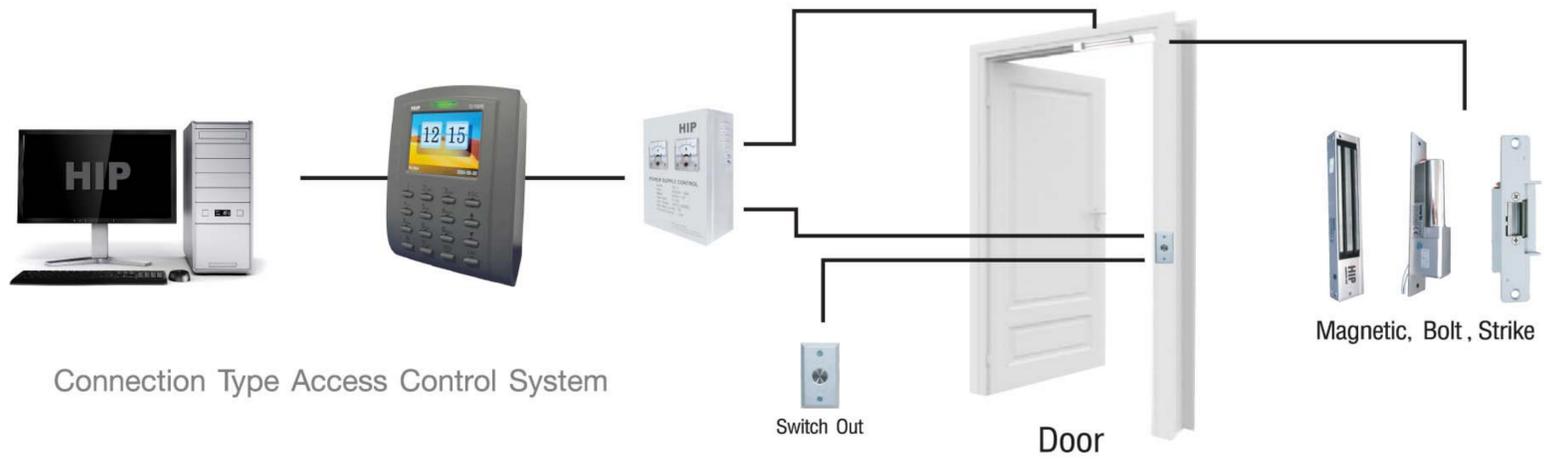

## Technical Specifications

Model	<b>ci100s</b>
Max. User	50,000 Users
Card Capacity	50,000 Cards (ID Card 125 kHz/ 13.56 MHz*Option)
Password Capacity	50,000 Passwords
Record Capacity	160,000 Records
Screen	2.4" TFT Graphic Interface
Resolution	320x240
Identification Time	≤0.5s
Identification Mode	Card / Password / Card+Password
Authentication Mode	1:N
Communication Protocols	TCP/IP, USB Link, U disk download, Wiegand in/out, RS485
Other Function	Access control, Door bell, Tamper Alarm, Schedule, Bell (ดังที่เครื่อง)
Operating Environment	Operating Temp : -10°C ~ +60°C, Humidity (RH): 20%~80%
Power	DC12V 1A
Battery Backup	No
Language	English, Thai (Other)
Size	370(L) x 260(W) x 525(H) mm
Optional Features	WIFI; MF Card (Option)
Software	HIP Premium Time Series 8 / HIP TIME 4.0