







### ENERGY-SAVING TOWER UPS WITH LCD DISPLAY



### The GreenPower UPS significantly reduces its power consumption and offers an LCD panel


Designed for home and office applications, the UT Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design helps UPS achieve ultra-low power consumption to reduce energy costs. The multifunction LCD readout clearly shows the UPS battery and power conditions. Other features include overload protection, EMI filter and configurable alarm to safeguard your devices.

#### SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Automatic Voltage Regulation (AVR)
- Generator Compatible
- LCD Status Display
- LED Status Indicator
- Surge and Spike Protection
- Overload Protection
- Configurable Alarm
- EMI and RFI Filtration
- Fire-resistant Capability

#### PRODUCT CALLOUTS

1. Power On/Off Switch
2. LED Status Indicator
3. LCD Status Display
4. AC Input Power Cord
5. Circuit Breaker
6. Surge Protected Outlets
7. Battery Backup & Surge Protected Outlets

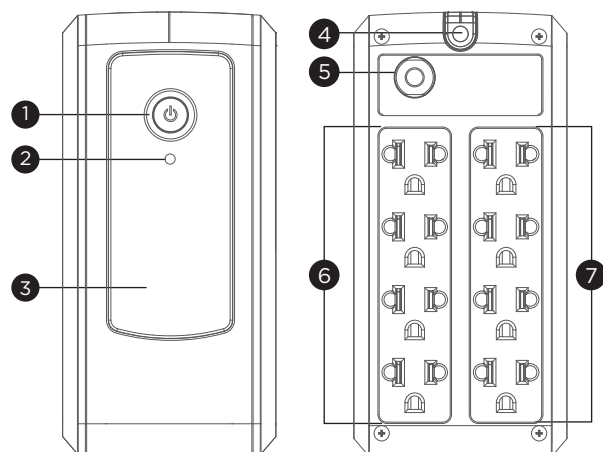

UT1000EGLCD



TECHNICAL SPECIFICATIONS

|                                                  |                                                |
|--------------------------------------------------|------------------------------------------------|
| Model Name                                       | UT1000EGLCD                                    |
| General                                          |                                                |
| UPS Topology                                     | Line-interactive                               |
| Energy Saving Technology                         | GreenPower UPS™ Bypass Technology              |
| Input                                            |                                                |
| Generator Compatibility                          | Yes                                            |
| Nominal Input Voltage (Vac)                      | 220/230/240                                    |
| Input Voltage Range (Vac)                        | 165 - 295                                      |
| Input Frequency (Hz)                             | 50 ± 5, 60 ± 5                                 |
| Input Frequency Detection                        | Auto-sensing                                   |
| Rated Input Current (A)                          | 4.55                                           |
| Input Connector Type                             | NEMA 5-15P                                     |
| Output                                           |                                                |
| Capacity (VA)                                    | 1000                                           |
| Capacity (Watts)                                 | 550                                            |
| On Battery Waveform                              | Simulated Sine Wave                            |
| Nominal Output Voltage (Vac)                     | 220/230/240                                    |
| On Battery Frequency (Hz)                        | 50 ± 1%, 60 ± 1%                               |
| Automatic Voltage Regulation (AVR)               | Single Boost, Single Buck                      |
| Overload Protection                              | Internal Current Limiting, Circuit Breaker     |
| Outlet(s) - Total                                | 8                                              |
| Outlet Type                                      | AS x 8                                         |
| Outlet(s) - Battery & Surge Protected            | 4                                              |
| Outlet(s) - Surge-Only Protected                 | 4                                              |
| Typical Transfer Time (ms)                       | 4                                              |
| Battery                                          |                                                |
| Runtime at 60W (min)                             | 45                                             |
| Runtime at 90W (min)                             | 31                                             |
| Runtime at 200W (min)                            | 4.5                                            |
| Typical Recharge Time (Hours)                    | 6                                              |
| User-replaceable                                 | No                                             |
| Battery Type                                     | Sealed Lead-acid                               |
| Surge Protection & Filtering                     |                                                |
| Surge Suppression (Joules)                       | 150                                            |
| EMI/RFI Filtration                               | Yes                                            |
| Management & Communications                      |                                                |
| LCD Panel                                        | Yes                                            |
| LED Indicators                                   | Power On, Line Mode, Battery Mode, Low Battery |
| Audible Alarms                                   | Battery Mode, Low Battery, Overload, UPS Fault |
| Physical                                         |                                                |
| Form Factor                                      | Tower                                          |
| Physical Size - UPS Module                       |                                                |
| Dimensions (WxHxD) (mm.)                         | 84 x 174 x 280                                 |
| Weight (kg.)                                     | 4.7                                            |
| Environmental                                    |                                                |
| Operating Temperature (°C)                       | 0 - 40                                         |
| Operating Relative Humidity (Non-condensing) (%) | 0 - 90                                         |
| Online Thermal Dissipation (BTU/hr)              | 34                                             |
| Certifications                                   |                                                |
| Certifications*                                  | TISI                                           |
| RoHS                                             | Yes                                            |

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.

