








ENERGY-SAVING TOWER UPS



The energy-saving technology saves up to 93% of UPS power consumption


Designed for home and office applications, the UT Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design helps UPS achieve ultra-low power consumption to reduce energy costs. The LED indicator shows the utility, battery and operating status of the UPS. Other features include overload protection, EMI filter and configurable alarm to safeguard your devices. NOTE: Power consumption of the UPS systems where energy-saving technology is applied may vary by model.

SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Automatic Voltage Regulation (AVR)
- Generator Compatible
- LED Status Indicator
- Overload Protection
- Surge and Spike Protection
- Configurable Alarm
- EMI and RFI Filtration
- Fire-resistant Capability

PRODUCT CALLOUTS

- 1 . Power On/Off Switch
- 2 . LED Status Indicators
- 3 . Battery Backup & Surge Protected Outlets
- 4 . Surge Protected Outlets
- 5 . Input Fuse
- 6 . Circuit Breaker
- 7 . AC Input Power Cord

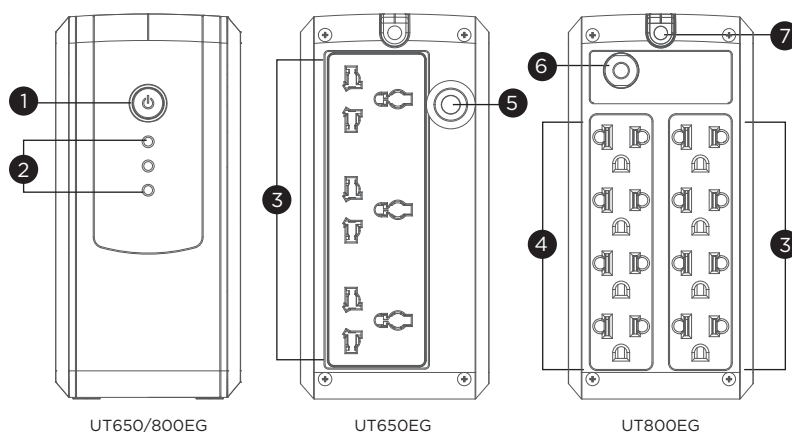

UT650/800EG

UT650EG

UT800EG



TECHNICAL SPECIFICATIONS

Model Name	UT650EG		UT800EG
General			
UPS Topology	Line-interactive		
Energy Saving Technology	GreenPower UPS™ Bypass Technology		
Input			
Generator Compatibility	Yes		
Nominal Input Voltage (Vac)	220/230/240		
Input Voltage Range (Vac)	165 - 295	165 - 290	
Input Frequency (Hz)	50 ± 5, 60 ± 5		
Input Frequency Detection	Auto-sensing		
Rated Input Current (A)	2.83		
Input Connector Type	NEMA 5-15P		
Output			
Capacity (VA)	650	800	
Capacity (Watts)	360	480	
On Battery Waveform	Simulated Sine Wave		
Nominal Output Voltage (Vac)	220/230/240		
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%		
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck		
Overload Protection	Internal Current Limiting, Fuse		Internal Current Limiting, Circuit Breaker
Outlet(s) - Total	3		8
Outlet Type	Universal x 3		AS x 8
Outlet(s) - Battery & Surge Protected	3		4
Outlet(s) - Surge-Only Protected	-		4
Typical Transfer Time (ms)	4		
Battery			
Runtime at 60W (min)	28		30
Runtime at 90W (min)	16		18
Typical Recharge Time (Hours)	6		
User-replaceable	No		
Battery Type	Sealed Lead-acid		
Surge Protection & Filtering			
Surge Suppression (Joules)	150		
EMI/RFI Filtration	Yes		
Management & Communications			
LED Indicators	Power On, Line Mode, Battery Mode, Bypass Mode, Low Battery, Overload, UPS Fault		
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault		
Physical			
Form Factor	Tower		
Physical Size - UPS Module			
Dimensions (WxHxD) (mm.)	84 x 174 x 280		
Weight (kg.)	3.8	4	
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 90		
Online Thermal Dissipation (BTU/hr)	34		
Certifications			
Certifications*	TISI		
RoHS	Yes		

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

