



QU63-XX

SPECIFICATION

- 1/2" THERMOSTATIC VALVE
- WALL MOUNTED NISSIMA TUB FILLER WITH RETRACTABLE HOSE
- 2 FUNCTIONS CERAMIC DIVERTER CARTRIDGE
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- 1/2" HI-FLOW INLET HOSES

FINISH AVAILABLE

- STAINLESS STEEL: CHROME
- TEMPERED GLASS: LAMINATED VINYL BACKING FINISHES
REFER TO WEBSITE FOR CHOICE OF COLORS.

CONNECTION

- 1/2" FEMALE NPT

FLOW RATE

- SPOUT: 25 L/MIN [6.6 GPM] @ 60 PSI
- HAND SHOWER: 7.9 L/MIN [2.1GPM] @ 60 PSI

ACCESSORIES

- HAND SHOWER, HS-217
- HAND SHOWER HOSE, 150 CM [59"]


WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.


FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.



Intertek ASME 112.118.1 / CSA B125.1

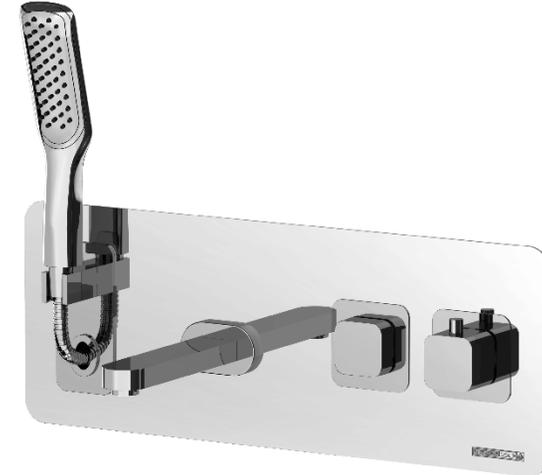

DIMENSIONS (SLIK COLLECTION SHOWN)

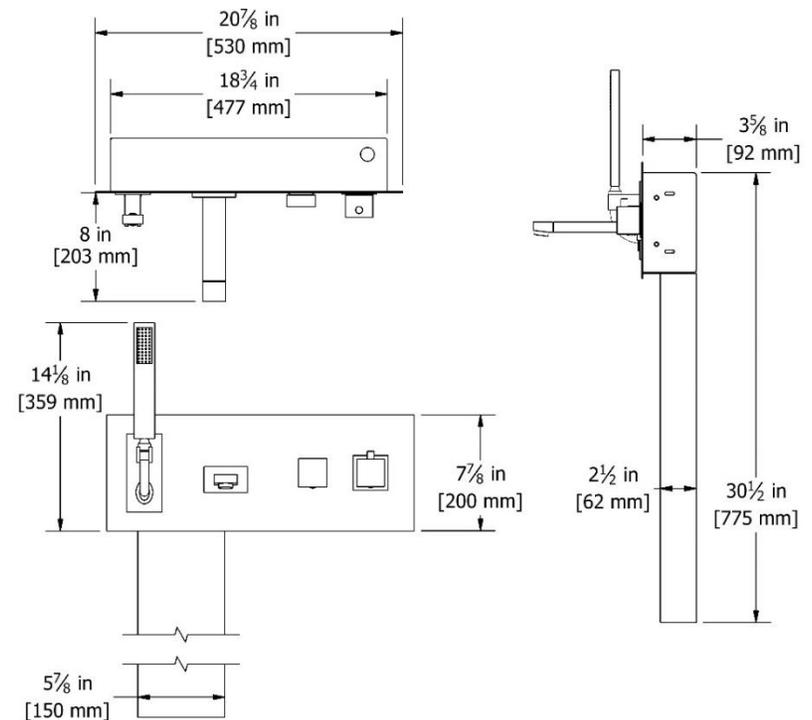

THE ROUGH BOX DIMENSIONS MAY VARY FROM ± 5MM

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.:02/2018