



TZG1-XX-QU/S812, TZG11-XX-QU/S812

SPECIFICATION

- BRUSHED STAINLESS STEEL SHOWER COLUMN CASING, GRADE #304
- 6MM THICK TEMPERED GLASS FACING
- ½" THERMOSTATIC VALVE
- 3 SHUT-OFF VALVES WITH VOLUME CONTROL
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH ½" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI
- ½" CONNECTION

AVAILABLE OPTION

- AVAILABLE WITH OR WITHOUT BODY JETS
- HAND SHOWER HOLDER SUPPORT REPLACED BY A SLIDING BAR

AVAILABLE FINISH

- TEMPERED GLASS: LAMINATED VINYL BACKING FINISHES
REFER TO WEBSITE FOR CHOICE OF COLORS

ACCESSORIES

| ACCESSORIES | TZG1-XX-QU/S812 | TZG11-XX-QU/S812 |
|----------------|-----------------|------------------|
| SHOWER HEAD | SSTS-812-Q | SSTS-812-Q |
| HAND SHOWER | HS-212 | HS-212 |
| SUPPORT | HSH-302 | HSHC-101-70 |
| HOSE | SSHE-175 | SSHE-150 |
| DIVERTER SPOUT | R-36 | R-26 |


FLOW RATE

| | |
|--------------------|-------------------------------|
| THERMOSTATIC VALVE | 30 L/MIN [7.9 GPM] @ 60 PSI |
| SHOWER HEAD | 9.5 L/MIN [2.5 GPM] @ 60 PSI |
| HAND SHOWER | 9.5 L/MIN [2.5 GPM] @ 60 PSI |
| BODY JETS (6) | 14.5 L/MIN [3.8 GPM] @ 60 PSI |
| DIVERTER SPOUT | 17 L/MIN [4.5 GPM] @ 60 PSI |
| SPOUT | 19.7 L/MIN [5.2 GPM] @ 60 PSI |

WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

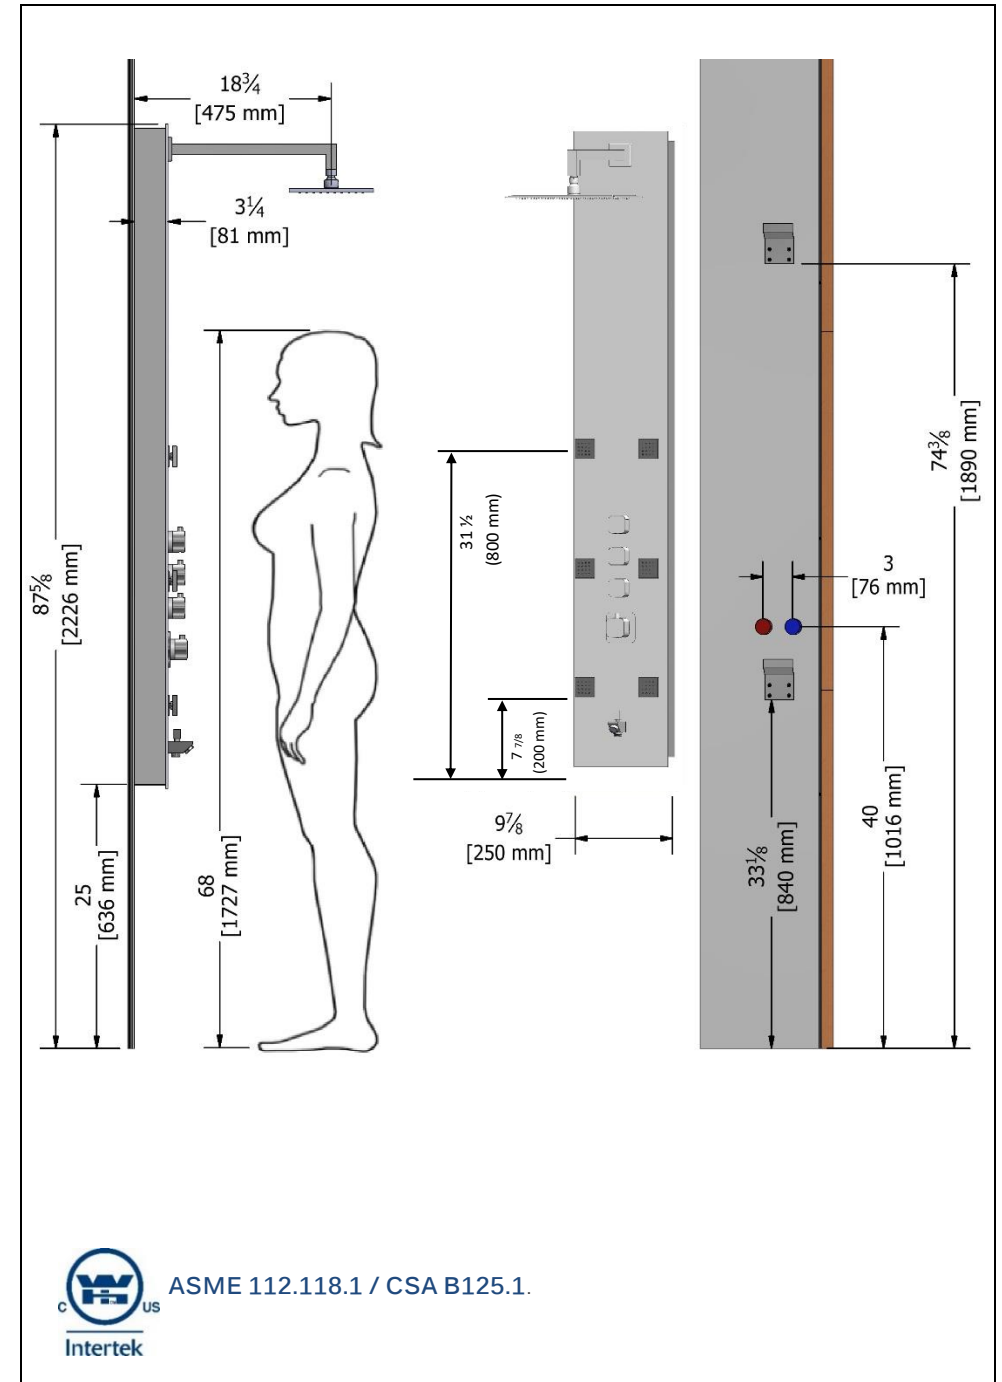

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.: 02/2018