



TZG1-XX-SL/S8, TZG1-XX-SL/S10, TZG1-XX-SL/S12,  
TZG11-XX-SL/S8, TZG11-XX-SL/S10, TZG11-XX-SL/S12

### SPECIFICATION

- BRUSHED STAINLESS STEEL SHOWER COLUMN CASING, GRADE #304
- 6MM THICK TEMPERED GLASS FACING
- ½" THERMOSTATIC VALVE
- 3 SHUT-OFF VALVES WITH VOLUME CONTROL
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH ½" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI
- ½" CONNECTION

### AVAILABLE OPTION

- AVAILABLE WITH OR WITHOUT BODY JETS
- CHOICE OF 3 SIZES OF SHOWER HEADS (8",10",12")
- HAND SHOWER HOLDER SUPPORT REPLACED BY A SLIDING BAR

### AVAILABLE FINISH

- TEMPERED GLASS: LAMINATED VINYL BACKING FINISHES  
REFER TO WEBSITE FOR CHOICE OF COLORS

### ACCESSORIES

ACCESSORIES	TZG1-XX-SL/S8	TZG1-XX-SL/S10	TZG1-XX-SL/S12	TZG11-XX-SL/S8	TZG11-XX-SL/S10	TZG11-XX-SL/S12
SHOWER HEAD	SSTS-08-S	SSTS-10-S	SSTS-12-S	SSTS-08-S	SSTS-10-S	SSTS-12-S
HAND SHOWER	HS-212	HS-212	HS-212	HS-212	HS-212	HS-212
SUPPORT	HSH-302	HSH-302	HSH-302	HSHC-101-70	HSHC-101-70	HSHC-101-70
HOSE	SSHE-175	SSHE-175	SSHE-175	SSHE-150	SSHE-150	SSHE-150
DIVERTER SPOUT	R-36	R-36	R-36	R-26	R-26	R-26


### FLOW RATE

THERMOSTATIC VALVE	30 L/MIN [7.9 GPM] @ 60 PSI
SHOWER HEAD	9.5 L/MIN [2.5 GPM] @ 60 PSI
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI
BODY JETS (6)	14.5 L/MIN [3.8 GPM] @ 60 PSI
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI

### WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

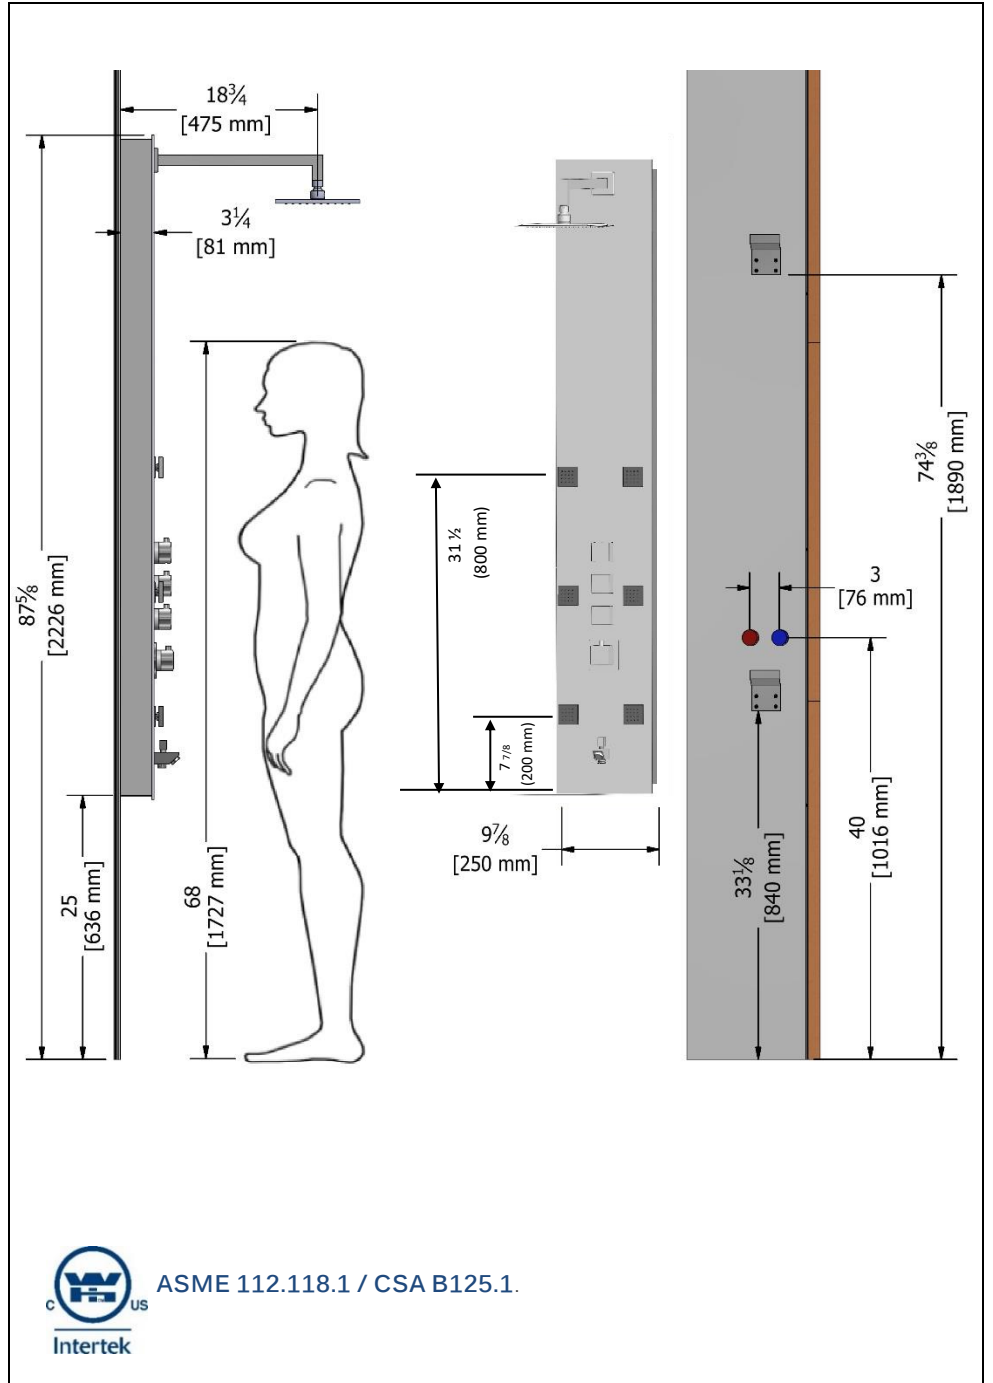

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.: 02/2018