

TZST-12-S8, TZST-12-S10, TZST-12-S12

**SPECIFICATION**

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- ½" THERMOSTATIC VALVE
- 3 SHUT-OFF VALVES WITH VOLUME CONTROL
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH ½" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI
- ½" CONNECTION

**AVAILABLE OPTION**

- CHOICE OF 3 SIZES OF SHOWER HEADS (8",10",12")
- HAND SHOWER HOLDER SUPPORT REPLACED BY A SLIDING BAR

**AVAILABLE FINISH**

- BRUSHED STAINLESS STEEL : TZST-12

**ACCESSORIES**

ACCESSORIES	TZST-12-S8	TZST-12-S10	TZST-12-S12
SHOWER HEAD	SSTS-08-S	SSTS-10-S	SSTS-12-S
HAND SHOWER	HS-203	HS-203	HS-203
SUPPORT	HSH-302	HSH-302	HSH-302
HOSE	SSHE-175	SSHE-175	SSHE-175
DIVERTER SPOUT	R-36	R-36	R-36


**FLOW RATE**

THERMOSTATIC VALVE	30 L/MIN [7.9 GPM] @ 60 PSI
SHOWER HEAD	9.5 L/MIN [2.5 GPM] @ 60 PSI
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI
JETS (6)	14.5 L/MIN [3.8 GPM] @ 60 PSI
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI

**WARRANTY**

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

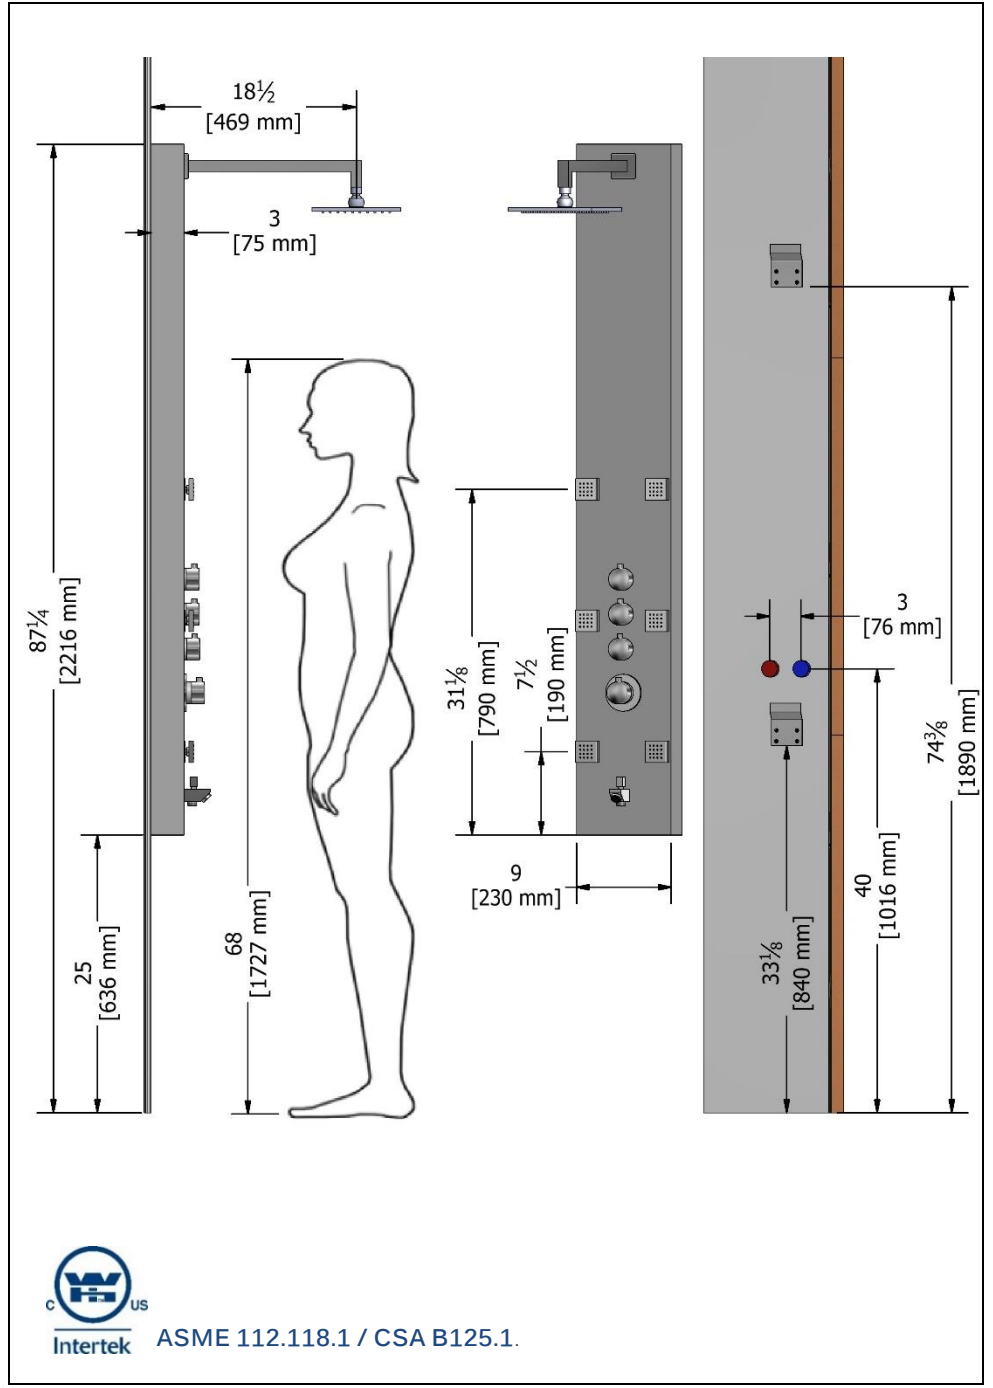

ASME 112.118.1 / CSA B125.1.

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.: 02/2018