

## TZST-15

### SPECIFICATION

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- ½" THERMOSTATIC VALVE
- 3 FUNCTIONS DIVERTER VALVE WITH HALF ZONES
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH ½" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI
- ½" CONNECTION

### AVAILABLE OPTION

- N/A

### AVAILABLE FINISH

- BRUSHED STAINLESS STEEL : TZST-15

### ACCESSORIES

ACCESSORIES	TZST-15
SHOWER HEAD	BJ-112-BC
HAND SHOWER	HS-204
SUPPORT	HSCH-101-70
HOSE	SSHE-150
DIVERTER SPOUT	N/A


### FLOW RATE

THERMOSTATIC VALVE	30 L/MIN [7.9 GPM] @ 60 PSI
SHOWER HEAD	9.5 L/MIN [2.5 GPM] @ 60 PSI
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI
JETS (2)	9.7 L/MIN [2.6 GPM] @ 60 PSI
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI

### WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

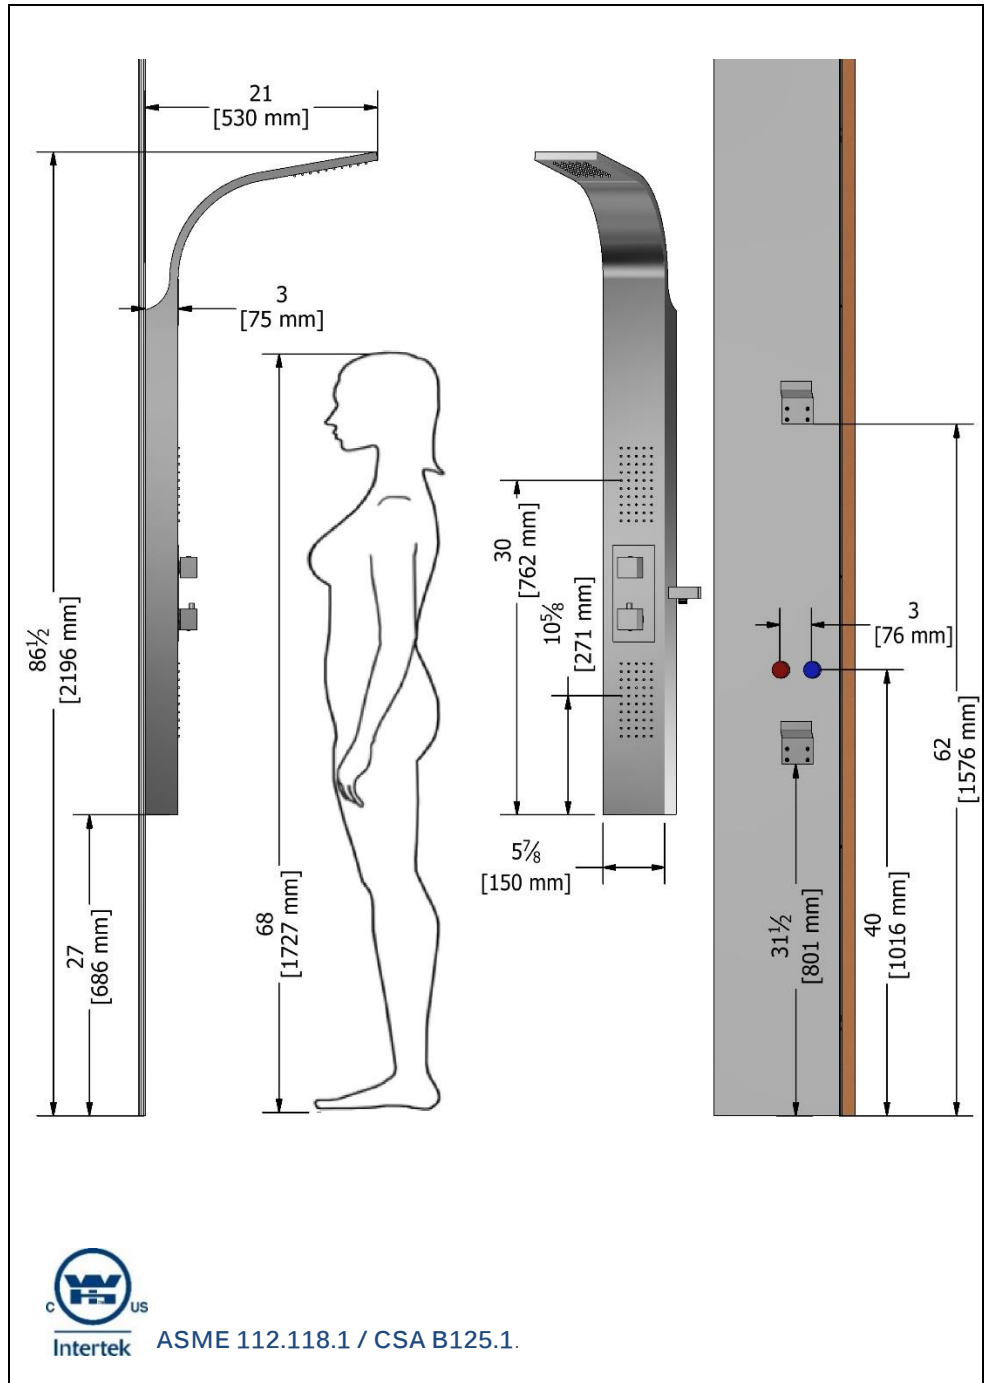

ASME 112.118.1 / CSA B125.1.

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.: 02/2018