



TZST-08.1, TZSTC-08.1, TZSTBL-08.1

SPECIFICATION

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- ½" THERMOSTATIC VALVE
- 4 SHUT-OFF VALVES WITH VOLUME CONTROL
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH ½" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI
- ½" CONNECTION

AVAILABLE OPTION

- SHOWER HEAD WITH LED (REF. MODEL TZST-08.1L)
- HAND SHOWER HOLDER SUPPORT REPLACED BY A SLIDING BAR

AVAILABLE FINISH

- BRUSHED STAINLESS STEEL : TZST-08.1
- MIRROR BLACK : TZSTBL-08.1
- CHROME : TZSTC-08.1

ACCESSORIES

ACCESSORIES	TZST-08.1	TZSTC-08.1	TZSTBL-08.1
SHOWER HEAD	SSTS-08-S	SSTS-08-S	SSTS-08-S
HAND SHOWER	HS-203	HS-203	HS-203
SUPPORT	HS-302	HS-302	HS-302
HOSE	SSHE-175	SSHE-175	SSHE-175
DIVERTER SPOUT	R-36	R-36	R-36


FLOW RATE

THERMOSTATIC VALVE	30 L/MIN [7.9 GPM] @ 60 PSI
SHOWER HEAD	9.5 L/MIN [2.5 GPM] @ 60 PSI
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI
JETS (5)	13.6 L/MIN [3.6 GPM] @ 60 PSI
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI

WARRANTY

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

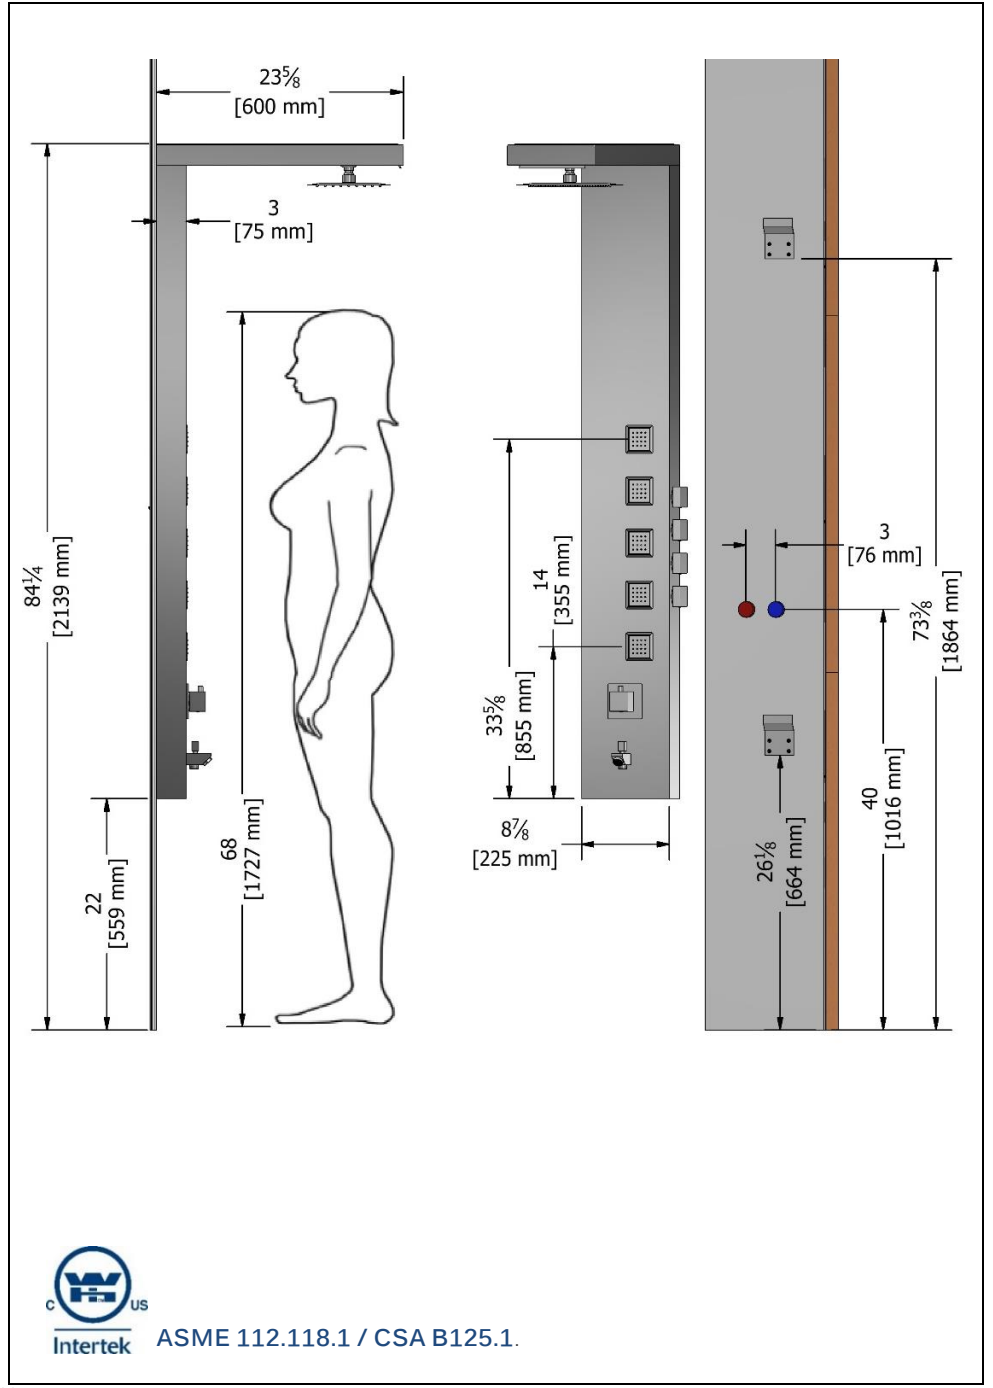

ASME B112.118.1 / CSA B125.1

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.: 02/2018