




Rebound Function
in Resistance




1.8s Quick
Lifting Speed



Long Remote
Control Range-30m



Negligible
Maintenance



24V DC
Brushless Motor

Parking Fencing Barrier

TW6000DCLD

- The gate movement adopts a crank shaker drive mechanism which has a compact structure, enhanced rigidity, and convenient maintenance and operation.
- When the gate rod is in the horizontal or vertical state, the movement structure is completely self-lock, which can effectively protect the reducer from external force impact.
- Compared with ordinary gate movement, the parts are reduced by about 20% and the faults are less.



(+91)-11-41916615
+91-95999-53923



D-162, Okhla Industrial Area
Phase I, New Delhi, 110020






sales@timewatchindia.com
www.timewatchindia.com

Specifications

Appearance Dimension	340mm * 272mm * 1000mm
Power Supply	220V ± 10% 50 ~ 60Hz
Voltage	AC110V/220V
Motor	24v150w brushless 2-stage variable speed all copper DC motor
Remote Control Distance	≤ 30m
Waterproof Grade	IP45
Working Environment	-15°C ~ +70°C
Box Thickness	Full-thickness 1.5mm
Open Time	6 Sec
Motor Capacity	24V DC Brushless Motor
Boom Length	3 to 6m

Dimensions

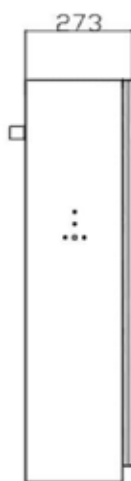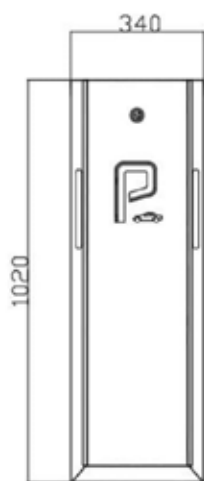

Head Office : D-162, Okhla Industrial Area Phase I,
New Delhi, 110020.



Regional Office : Mumbai, Bengaluru, Ahmedabad.
International Office : Dubai



Phone : +91-95999-53923



Sales : sales@timewatchindia.com



Support : helpdesk@timewatchindia.com

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.