

AI-Based



Fingerprint Login



One Key
Turn Off



Baggage Recording



High Resolution
Color Display




Sound &
Light Alarm




Multi Energy



Baggage
Counter



Compact
Design



Scan Palletized
Load



Energy Saving

Ai-Based X-ray Baggage Inspection System

TW6040B (AI)

The TW6040B (AI) X-ray security inspection system is a new generation X-ray security inspection system that integrates multi-functions such as intelligent detection, baggage connection, Hi-Resolution display, etc. This model is applicable to be deployed in scenarios such as customs, office buildings, large events, courts, prisons, embassies, factories, schools, hospitals, public places, etc. The size of the tunnel is suitable for boarding suitcase, small parcels, backpacks, envelopes, handbags, etc.

- **Material Classification:** Advanced material discrimination technology to recognize different materials and assign different colors (3 or 6 colors).
- **Intelligent Recognition:** Integrated with the advanced detection algorithm, which could detect more than 35 major types of target objects and alarm on them automatically.
- **HD Image:** Integrated with the new generation of image processing system, which could provide with a clearer X-ray image with high resolution.
- **Variable Speed:** One-click to switch the conveyor speed to fit different application scenarios.
- **Remote Management:** Network integration supported real time status, X-ray images, videos, alarm information can be viewed remotely through network, and report can be viewed and downloaded remotely for better management process.



(+91)-11-41916615
+91-95999-53923



D-162, Okhla Industrial Area
Phase I, New Delhi, 110020



sales@timewatchindia.com
www.timewatchindia.com


Specification

Dimensions	
Tunnel Dimensions	620 mm (W) × 420 mm (H)
System Dimensions	2011 mm (L) × 887 mm (W) × 1260 mm (H)
General Specifications	
Conveyor Height	600 mm
Conveyor Speed	0.2 m/s, 0.3 m/s, 0.4m/s adjustable
Max. Conveyor Capacity	165 kg (Even Distributed)
Performance	
Wire Resolution	38/40 AWG
Penetration (Steel)	34/36 mm
X-ray Generator	
Number of Generators	1
Anode Voltage / Current	160KV
Cooling / Working cycle	Oil-cooling / Continuous
Health and Safety	
External dose rate	< 0.5 µSv/h (50mm Distance to the Housing)
Film Safe	Guaranteed up to ISO1600
Detection Algorithm	
Prohibited Goods Detection	35 Major Types, over 64 categories
Others	Shield Alarms, etc.
Integrated Cameras	
Cameras	3 Camera, Resolution: 1920x1080
Sensor Type	1/2.8" Progressive Scan CMOS
Video Compression Standard	H.265 / H.264 / MJPEG
Installation Data	
Power Consumption	< 0.8 KVA
Power Supply	AC 220V (-15% to +10%) , 50Hz/60Hz (±3Hz); AC 110V (-15% to +10%) , 50Hz/60Hz (±3Hz);
Noise level	< 60 dB



Operating Temperature / Humidity	5°C to 40°C / 5 % to 95 % (non-condensing)
Storage Temperature / Humidity	-20°C to 60°C / 5 % to 95 % (non-condensing)
Weight	700 Kg
Additional Features	
Image Processing	Color / Black & White(C/B&W), Organic Stripping(ORG-), Inorganic Stripping(INORG-), Negative, High / Low penetration (H/L), Absorptivity increase(ABS+), Absorptivity decrease(ABS-), Super Enhancement(SEN), Edge Enhancement(Edge), 64x seamless zoom in and out, etc.
Software Functions	Professional TIP system, Operation Intro, Photo and X-ray image connection, etc
Operation Display	21.5 inch
Storage	1,00,000 +

Dimension Drawing

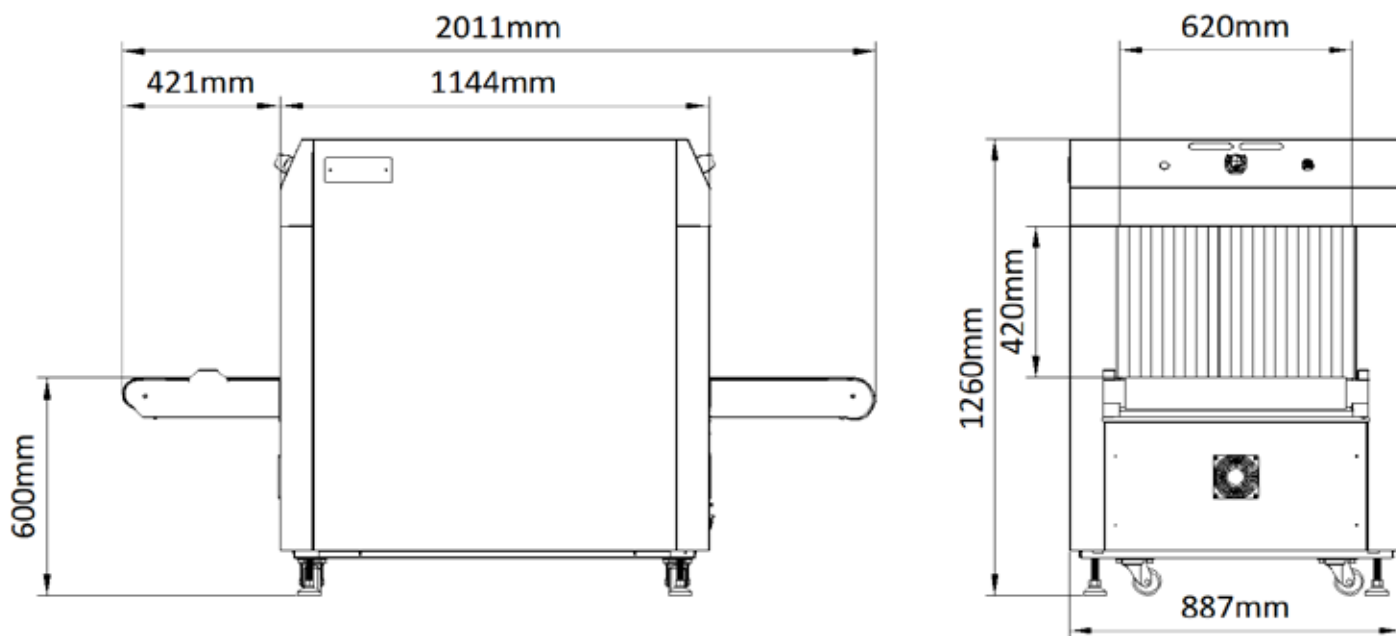

Head Office : D-162, Okhla Industrial Area Phase I, New Delhi, 110020.

Regional Office : Mumbai, Bengaluru, Ahmedabad, Chennai, Kolkata.

International Office : Dubai

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.

Phone : +91-95999-53923

Sales : sales@timewatchindia.com

Support : helpdesk@timewatchindia.com