




Double
Infrared Mode



Waterproof &
Fireproof Body




0 to 99
Sensitivity Level



Easy to Operate
with Big LCD Screen



20 min Quick
Assemble & Disassemble



Digital Circuit
Design,
Anti-Interference



Completely
Harmless to
Humans




Sound And Alarm
Function



Digital Display



People Counting

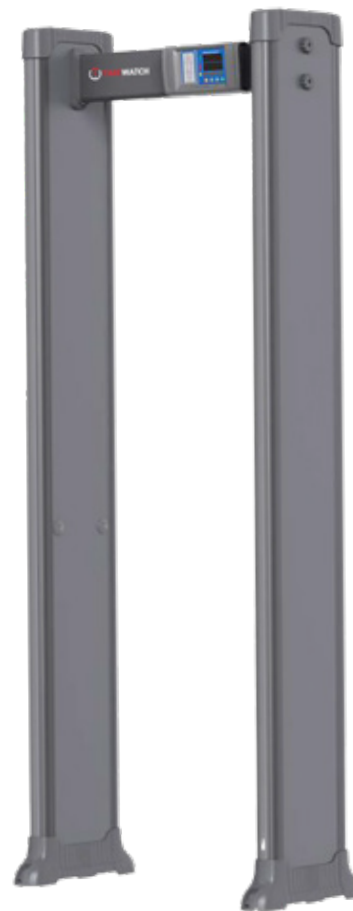

Door Frame Metal Detector

TWD-2101 (6/9 Zone DFMD)

Easy to operate with the big LCD screen, English operate language. Infrared remote controller adopt-ed.

Made of high-quality alloy and PVC synthetic material, Watertightness, and fireproofing.

One detecting zones that overlapped each other area as tall as the examinee combined with alarm-LED on every zone. Show the position of the target metal directly.

Four emitters match with receivers opposite, eliminating detecting blind spots,

Sensitivities can be adjusted: Each zone's sensitivity can be adjusted from 0 to 255. You can select the right Sensitivity you want. For example, you can change the sensitivity to avoid inferences such as the coins, keys, buckle, etc

The function of statistics: The number of passed examinees and the alarm times can be counted.

Parallel operation: The gate can not only work itself but also work together with the Same model (when parallel operating, the distance between each unit must be more than 40 cm) so that it can meet the demand of a big visitor flow rate.

Harmless to people: The gate is harmless to people with cardiac pacemakers, pregnant women, tapes, video-tapes, etc



(+91)-11-41916615
+91-95999-53923



D-162, Okhla Industrial Area
Phase I, New Delhi, 110020



sales@timewatchindia.com
www.timewatchindia.com

Easy Assembly: Integrated design, you can assemble or disassemble it in 20 minutes with the operation instruction.

Protected by password: Only the authorized person can operate it.

Location signal display light: Display the responses of each zone apart (independent of alarm lights). Adjust the Sensitivity of each zone according to the responses, and get the best sensitivities.

Specification

Technical Parameters	
Power Supply	220-260V/AC
Power	<15W
External Dimension	2200mm(H)*820mm(W)*550mm(D)
Passageway Dimension	2000mm(H)*720mm(W)*340mm(D)
Work Environment	-20 °C to 65 °C (-4 °F to 149 °F)
Technical Parameters	
Main Case Packing	0.755m*0.485m*0.255m (Carton)
Probe Packing	2.27m*0.62m*0.19m(Carton)
Volume In Total	0.361m
Weight	50kg (Approximate)
Standard	
One Main Case One Left Probe One Right Probe	
One Power Line Eight Screws	
One Instruction (Including one Certificate of Quality & Guarantee Repair List)	



Head Office : D-162, Okhla Industrial Area Phase I, New Delhi, 110020.

Regional Office : Mumbai, Bengaluru, Ahmedabad, Chennai, Kolkata.

International Office : Dubai

Phone : +91-95999-53923

Sales : sales@timewatchindia.com

Support : helpdesk@timewatchindia.com

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.