



Life Time No Maintenance



No attrition & High Temperature Resistant



Failure proof Electromagnetic Solenoid valves



Low Noise & High Intelligence



SS304



≤5 million times




Turnstile Gate

TWLD-TS2700

The Semi-Automatic Tripod Turnstile ensures smooth and easy passage with minimal passing resistance. It offers versatile working modes, including One way Traffic / Two Way Traffic operation, all configurable through buttons on the main control board.

In case of a power outage, the arms automatically drop for unimpeded access. Additionally, the turnstile features obstacle detection with automatic stopping for enhanced safety. It can also be seamlessly integrated with facial recognition, fingerprint, biometrics and other contactless systems for a no-touch user experience.









Specification

Dimension	510(L) x 310(W) x 1010(H)mm
Material	304 Original brushed stainless steel, acrylic
Channel Width	500mm
Traffic Direction	One-way traffic/two-way traffic
Traffic Speed	25~30 people/min in normally open mode and 15~20 people/min in normally closed mode The actual traffic speed is different from the traffic environment and personnel
Opening Mode	Card swiping and Face, Fingerprint , biometric verification opening, button opening, etc.
Opening Signal	Dry contact signal
Life	≤5 million times
Power	30-60W
Applicable Temperature	-20~75°C (add thermostat below this temperature)

Dimension Drawing

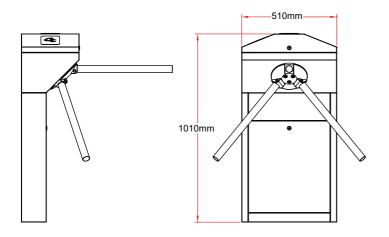









Phone: +91-95999-53923







- Head Office: D-162, Okhla Industrial Area Phase I, New Delhi, 110020.
- Regional Office: Mumbai, Bengaluru, Ahmedabad,

International Office: Dubai

Chennai, Kolkata.

Sales: sales@timewatchindia.com **Support**: helpdesk@timewatchindia.com

Disclaimer: All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.







