





No attrition & High Temperature Resistance







Low Noise & High Intelligence






The Turnstile Gate ensures effortless passage with minimal resistance. It offers multiple operational modes, including bi-directional and single-directional, all of which can be easily configured using buttons on the main control board.

In the event of a power outage, the arms automatically lower and rise again when power is restored. The gate also features automatic stopping upon detecting obstacles, ensuring safety. Additionally, it supports integration with facial recognition and other biometric systems for a seamless, contactless user experience.









## Specification

Integration	Face, Finger and Card
Dimension	1200(L) x 220(W) x 980(H)mm
Material	304 original brushed stainless steel, acrylic
Channel Width	520mm
Traffic Direction	One-way traffic/two-way traffic
Traffic Speed	25~30 people/min in normally open mode and 15~20 people/min in normally closed mode; The actual traffic speed is different from the traffic environment and personnel
Opening Mode	Card swiping and other Face, Fingerprint biometric verification opening, button opening, etc
Opening Signal	Dry contact signal
Life	≥5 million times
Power	30-60W
Applicable Temperature	-20~70 °C (add thermostat below this temperature)
Туре	Bridge Type

## **Dimension Drawing**

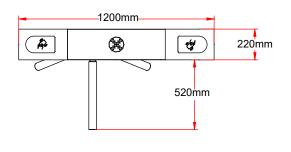

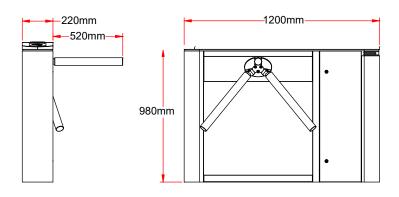





Head Office: D-162, Okhla Industrial Area Phase I, New Delhi, 110020.

Regional Office: Mumbai, Bengaluru, Ahmedabad, Chennai, Kolkata.

International Office: Dubai

Phone: +91-95999-53923

Sales: sales@timewatchindia.com

Support: helpdesk@timewatchindia.com







Disclaimer: All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may