



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	D MIN.	E ±0.015	L ±0.015
16	1.000	1.750	1.500	1.781
18	1.125	1.875	1.625	1.843
20	1.250	2.000	1.750	2.000
22	1.375	2.125	1.875	2.125
24	1.500	2.312	2.062	2.093
26	1.625	2.500	2.250	2.125
28	1.750	2.625	2.375	2.125
30	1.875	2.750	2.500	2.500
32	2.000	2.937	2.687	2.656
34	2.125	3.125	2.875	2.750
36	2.250	3.250	3.000	2.781
38	2.375	3.375	3.125	2.906
40	2.500	3.500	3.250	2.812
42	2.625	3.750	3.437	3.000
44	2.750	3.875	3.562	3.000
46	2.875	4.000	3.687	3.218
48	3.000	4.188	3.875	3.656
50	3.125	4.437	4.062	3.656
52	3.250	4.562	4.187	3.718
54	3.375	4.687	4.312	3.781
56	3.500	4.812	4.437	3.843
58	3.625	4.937	4.562	3.968
60	3.750	5.062	4.687	4.093
62	3.875	5.187	4.812	4.250
64	4.000	5.312	4.937	4.718

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 150 PSI (10.6Kg/cm²)

Temperature: -57°C to 316°C

**Depends on elastomer material*

- **Metal Parts:** 316 Stainless Steel
- **Seat:** Ceramic, Silicon Carbide, Tungsten Carbide, Stainless Steel, Ni-Resist.
- **Bellow:** NBR (Nitrile), FKM (Viton®), CR (Neopreno®), E.P.R (EPDM), Kalrez (FFKM), Aflas (TFE/P), Creavey (PTFE/FKM), Silicón (VMQ)
- **Rotary Face:** Graphite, Silicon Carbide, Tungsten Carbide
- **Spring:** 316 Stainless Steel

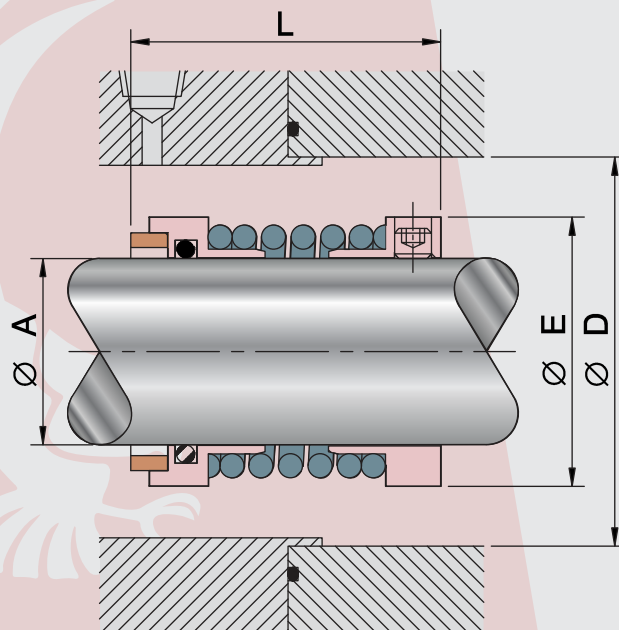

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

