



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	D MIN.	E ±0.015	L ±0.015
16	1.000	1.750	1.500	1.500
18	1.125	1.875	1.625	1.562
20	1.250	2.000	1.750	1.688
22	1.375	2.125	1.875	1.750
24	1.500	2.312	2.062	1.750
26	1.625	2.500	2.250	1.750
28	1.750	2.625	2.375	1.750
30	1.875	2.750	2.500	1.875
32	2.000	2.937	2.687	1.938
34	2.125	3.125	2.875	2.063
36	2.250	3.250	3.000	2.063
38	2.375	3.375	3.125	2.250
40	2.500	3.500	3.250	2.250
42	2.625	3.750	3.437	2.313
44	2.750	3.875	3.562	2.313
46	2.875	4.000	3.687	2.563
48	3.000	4.188	3.875	2.750
50	3.125	4.437	4.062	2.750
52	3.250	4.562	4.187	2.750
54	3.375	4.687	4.312	2.750
56	3.500	4.812	4.437	2.750
58	3.625	4.937	4.562	3.000
60	3.750	5.062	4.687	3.250
62	3.875	5.187	4.812	3.500
64	4.000	5.312	4.937	3.625

OPERATING CONDITIONS

Speed: Up to 3,600 RPM.

Pressure: 150 PSI (10.6Kg/cm²)


Temperature: -57°C to 316°C

**Depends on elastomer material*

- **Metal Parts:** 316 Stainless Steel
- **Seat:** Ceramic, Silicon Carbide, Tungsten Carbide, Stainless Steel, Ni-Resist.
- **Bellow:** NBR (Nitrile), FKM (Viton®), CR (Neopreno®), E.P.R (EPDM), Kalrez (FFKM), Aflas (TFE/P), Creavey (PTFE/FKM), Silicón (VMQ)
- **Rotary Face:** Graphite, Silicon Carbide, Tungsten Carbide
- **Spring:** 316 Stainless Steel

TIPO 15C

TIPO 19

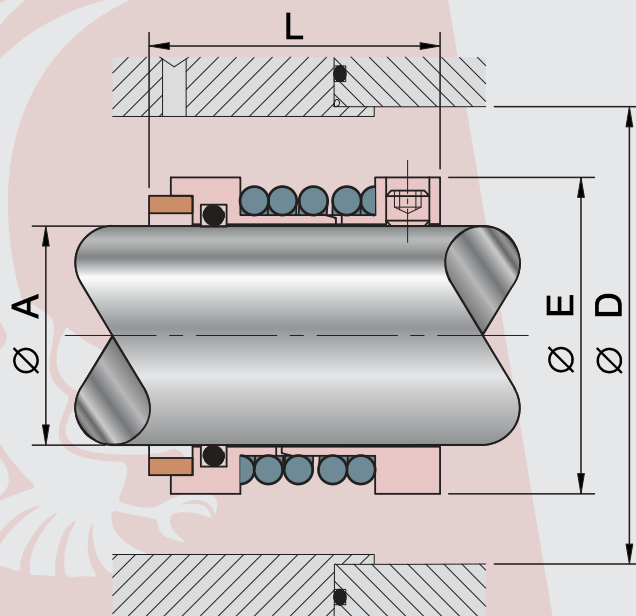

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

