


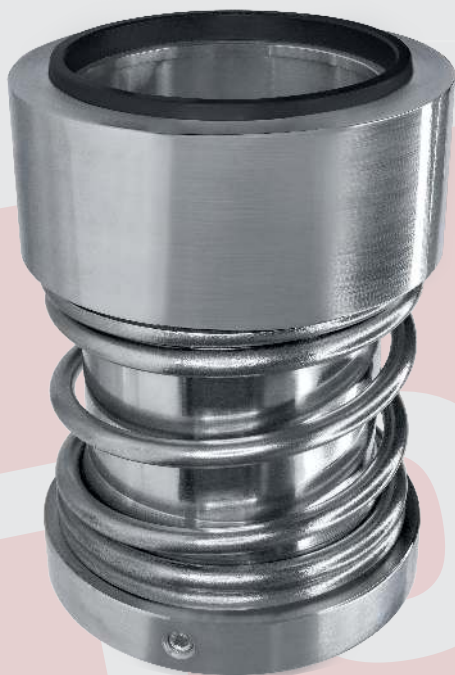

DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	D MIN.	E ±0.015	L ±0.015
16	1.000	1.875	1.654	2.478
18	1.125	1.937	1.817	2.587
20	1.250	2.250	2.067	2.821
22	1.375	2.437	2.304	3.024
24	1.500	2.562	2.430	3.024
26	1.625	2.625	2.500	3.196
28	1.750	2.875	2.746	3.478
30	1.875	3.000	2.871	3.478
32	2.000	3.125	2.984	3.557
34	2.125	3.375	3.172	3.557
36	2.250	3.437	3.295	3.838
38	2.375	3.688	3.543	3.920
40	2.500	3.781	3.661	4.002
42	2.625	4.000	3.858	4.158
44	2.750	4.250	4.095	4.283
46	2.875	4.250	4.095	4.283
48	3.000	4.375	4.252	4.377
50	3.125	4.500	4.350	4.377
52	3.250	4.625	4.448	4.440
54	3.375	4.781	4.646	4.502
56	3.500	5.000	4.882	4.221
58	3.625	5.187	5.031	4.221
60	3.750	5.375	5.197	4.846
62	3.875	5.500	5.332	4.846
64	4.000	5.688	5.551	4.940

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 1000 PSI (70.4Kg/cm²)

Temperature: -57°C to 316°C

**Depends on elastomer material*

- **Metal Parts:** 316 Stainless Steel
- **Seat:** Ceramic, Silicon Carbide, Tungsten Carbide, Stainless Steel, Ni- Resist.
- **Bellow:** NBR (Nitrile), FKM (Viton®), CR (Neopreno®), E.P.R (EPDM), Kalrez (FFKM), Aflas (TFE/P), Creavey (PTFE/FKM), Silicón (VMQ)
- **Rotary Face:** Graphite, Silicon Carbide, Tungsten Carbide
- **Spring:** 316 Stainless Steel

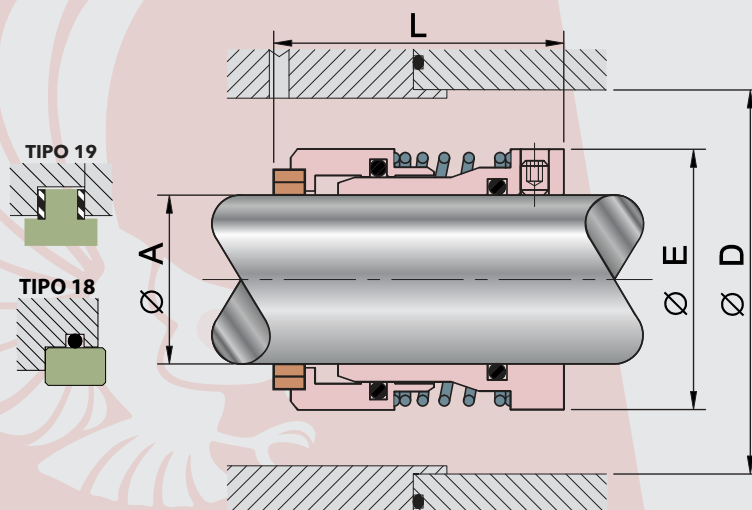

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

