



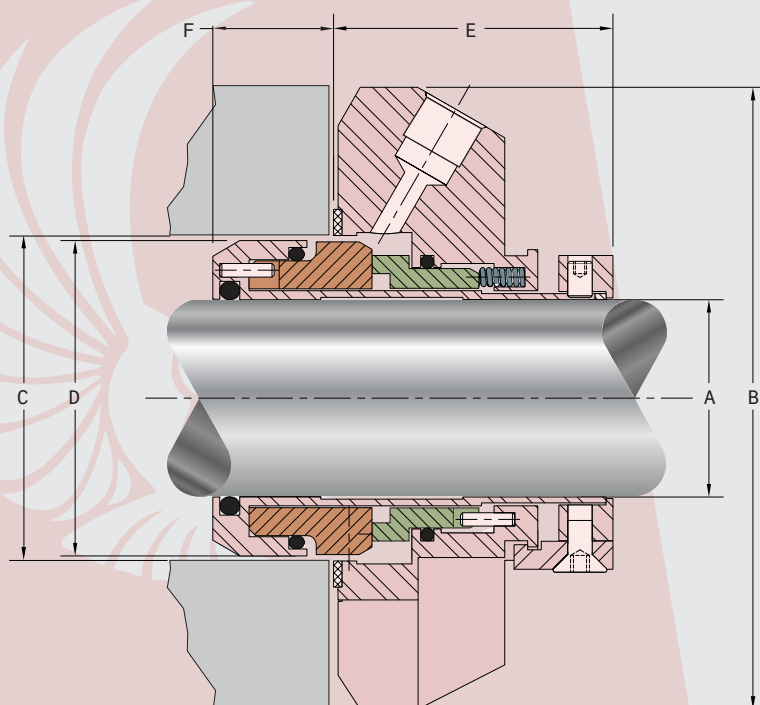

DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	B ±0.015	C MIN.	D MAX.	E ±0.015	F ±0.015	G ±0.015.	H ±0.015.
18	1.125	5.500	1.960	1.890	1.950	0.843	2.880	0.437
22	1.375	4.360	2.275	2.205	1.950	0.840	3.400	0.562
28	1.750	5.500	2.668	2.598	1.950	0.863	3.750	0.562
30	1.875	5.500	2.826	2.756	1.950	0.903	3.880	0.562
34	2.125	6.000	3.141	3.071	1.950	0.903	4.250	0.562
42	2.625	6.500	3.6912	3.622	1.950	1.021	5.000	0.562

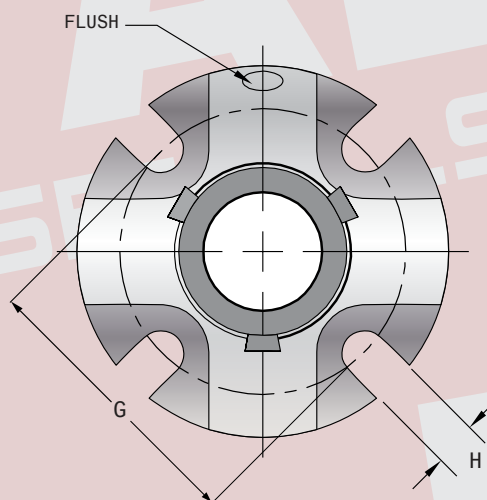

OPERATING CONDITIONS

Speed: Up to 3,600 RPM.

Pressure: 450 PSI (32Kg/cm²)

Temperature: -57 °C a 316 °C

**Depends on elastomer material*

- **Metal Parts:** 316 Stainless Steel
- **Stationary Face:** Silicon Carbide, Graphite, "Tungsten Carbide"
- **Elastomer:** NBR (Nitrile), FKM (Viton®), CR (Neoprene®), E.P.R (EPDM), Kalrez/Perlast (FFKM), Aflas (TFE/P) and Silicone (VMQ)
- **Rotary Face:** Graphite, Silicon Carbide
- **Spring:** Hastelloy "C"

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

