



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	E ±0.015	L ±0.015
16	1.000	1.626	0.531
18	1.125	1.751	0.531
20	1.250	1.876	0.531
22	1.375	2.063	0.563
24	1.500	2.188	0.563
26	1.625	2.313	0.563
28	1.750	2.501	0.593
30	1.875	2.626	0.593
32	2.000	2.751	0.593
34	2.125	2.938	0.750
36	2.250	3.064	0.750
38	2.375	3.189	0.750
40	2.500	3.377	0.813

OPERATING CONDITIONS


Speed: Up to 10,000 RPM.

Pressure: 200 PSI (14Kg/cm²)

Temperature: -57°C to 204°C

**Depends on elastomer material*

-  **Metal Parts:** 316 Stainless Steel
-  **Seat:** Ceramic, Silicon Carbide, Tungsten Carbide, Stainless Steel, Ni-Resist.
-  **Bellow:** NBR (Nitrile), FKM (Viton®), E.P.R (EPDM)
-  **Rotary Face:** Graphite
-  **Spring:** 316 Stainless Steel

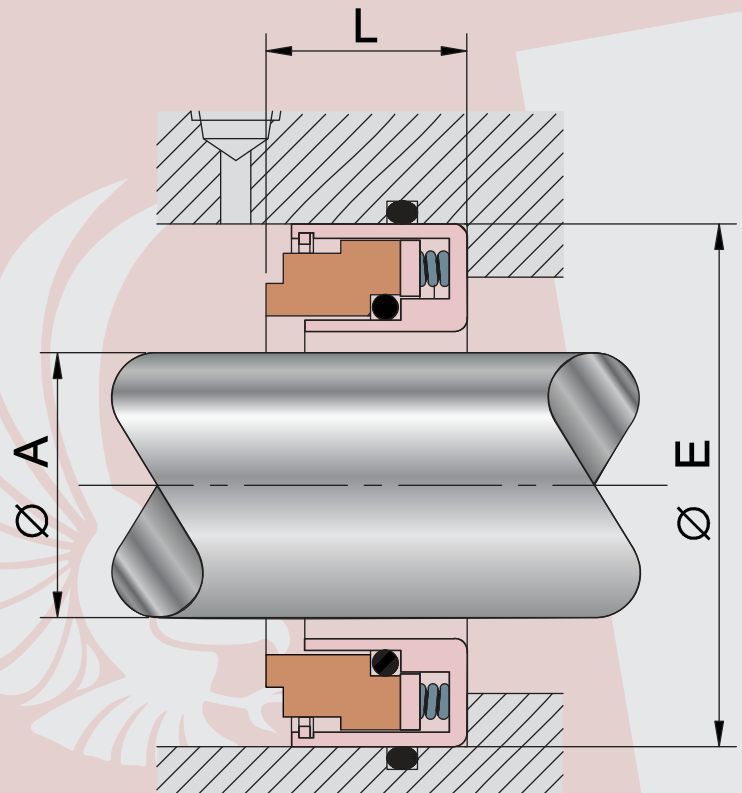

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

