



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	B ±0.002	E ±0.015	L ±0.015	M ±0.005	N ±0.015
18	1.125	2.340	1.875	1.000	0.625	1.000
26	1.625	2.832	2.437	1.125	0.625	1.000
34	2.125	3.330	3.125	1.153	0.625	1.000

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 175 PSI (12.2Kg/cm²)

Temperature: -57°C to 316 °C

**Depends on elastomer material*

-  **Metal Parts:** 316 Stainless Steel
-  **Seat:** Silicon Carbide, Stainless Steel
-  **Bellow:** NBR (Nitrile), FKM (Viton®), CR (Neopreno®), E.P.R (EPDM), Kalrez/Perlast (FFKM), Aflas (TFE/P), Creavey (PTFE/FKM), Silicón (VMQ)
-  **Rotary Face:** Graphite
-  **Spring:** Hastelloy "C"
-  **Seat Bellow:** Asbesto-free, Teflon (PTFE)

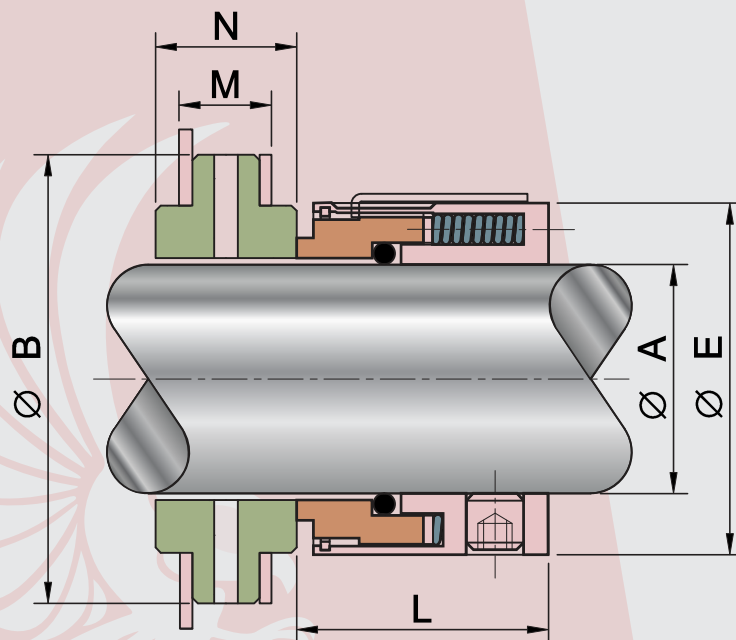

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

