



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	D MIN.	E ±0.015	L ±0.015
16	1.000	1.687	1.562	1.750
18	1.125	1.812	1.687	1.750
20	1.250	1.937	1.812	1.750
22	1.375	2.062	1.937	1.750
24	1.500	2.187	2.062	1.750
26	1.625	2.375	2.250	1.750
28	1.750	2.500	2.375	1.750
30	1.875	2.625	2.500	1.750
32	2.000	2.750	2.625	1.750
34	2.125	2.875	2.750	1.750
36	2.250	3.000	2.875	1.750
38	2.375	3.125	3.000	1.750
40	2.500	3.250	3.125	1.750
42	2.625	3.375	3.250	1.750
44	2.750	3.500	3.375	1.750
46	2.875	3.625	3.500	1.750
48	3.000	3.937	3.812	1.750
50	3.125	4.062	3.937	1.750
52	3.250	4.187	4.062	1.750
54	3.375	4.312	4.187	1.750
56	3.500	4.437	4.312	1.750
58	3.625	4.562	4.437	1.750
60	3.750	4.687	4.562	1.750
62	3.875	4.812	4.687	1.750
64	4.000	4.937	4.812	1.750

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 450 PSI (32.0Kg/cm²)

Temperature: -59°C to 316°C

**Depends on elastomer material*

- **Metal Parts:** 316 Stainless Steel
- **Seat:** Ceramic, Silicon Carbide, Tungsten Carbide, Teflon Asbesto-Free, Stainless Steel, Ni- Resist.
- **Bellow:** NBR (Nitrile), FKM (Viton®), CR (Neopreno®), E.P.R (EPDM), Kalrez/Perlast (FFKM), Aflas (TFE/P), Silicón (VMQ)
- **Rotary Face:** Graphite, Silicon Carbide
- **Spring:** Hastelloy "C"

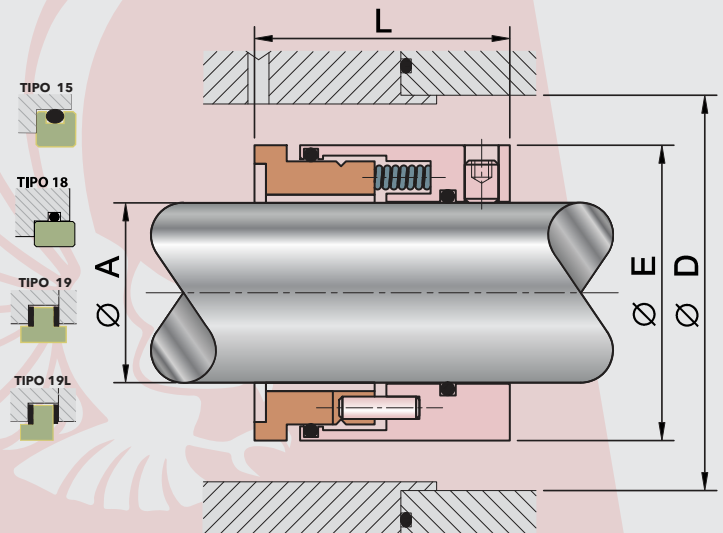

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

