



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	D MIN.	E ±0.015	L ±0.015
16	1.000	1.687	1.562	1.687
18	1.125	1.812	1.687	1.562
20	1.250	1.937	1.812	1.687
22	1.375	2.062	1.937	1.750
24	1.500	2.295	2.170	1.750
26	1.625	2.420	2.295	1.750
28	1.750	2.545	2.420	1.750
30	1.875	2.670	2.545	1.750
32	2.000	2.795	2.670	1.750
34	2.125	2.920	2.795	1.750
36	2.250	3.045	2.920	1.875
38	2.375	3.170	3.045	1.875
40	2.500	3.312	3.187	1.875
42	2.625	3.437	3.312	1.875
44	2.750	3.562	3.437	1.875
46	2.875	3.750	3.625	1.875
48	3.000	3.875	3.750	1.875
50	3.125	4.000	3.875	1.875
52	3.250	4.125	4.000	1.875
54	3.375	4.250	4.125	1.875
56	3.500	4.375	4.250	1.875
58	3.625	4.500	4.375	1.875
60	3.750	4.625	4.500	1.875
62	3.875	4.750	4.625	1.875
64	4.000	4.875	4.750	1.875

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 300 PSI (21.0Kg/cm²)

Temperature: -73°C to 426°C

**Depends on elastomer material*

- **Metal Parts:** 316 Stainless Steel
- **Seat:** Silicon Carbide, Tungsten Carbide
- **Bellow:** Graphite (Grafoil)
- **Rotary Face:** Graphite, Silicon Carbide, Tungsten Carbide
- **Spring:** Hastelloy "C"
- **Bellow:** Graphite (Grafoil), Kalrez/Perlast (FFKM)

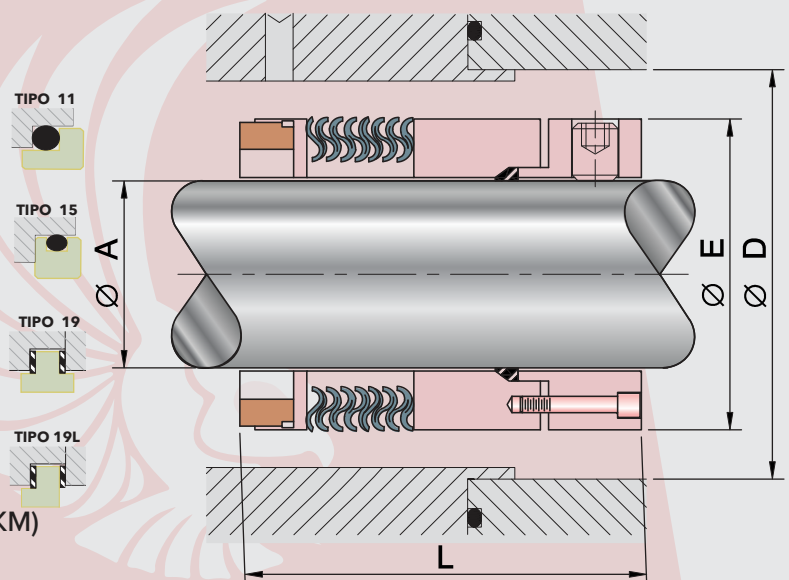

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

