



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	D MIN.	E ±0.015	L ±0.015
16	1.000	1.582	1.457	1.250
18	1.125	1.812	1.687	1.250
20	1.250	1.937	1.812	1.312
22	1.375	2.062	1.937	1.437
24	1.500	2.187	2.062	1.437
26	1.625	2.312	2.187	1.437
28	1.750	2.437	2.312	1.437
30	1.875	2.562	2.437	1.500
32	2.000	2.687	2.562	1.500
34	2.125	2.812	2.687	1.500
36	2.250	2.937	2.812	1.562
38	2.375	3.062	2.937	1.562
40	2.500	3.312	3.187	1.562
42	2.625	3.437	3.312	1.625
44	2.750	3.562	3.437	1.625
46	2.875	3.750	3.625	1.687
48	3.000	3.875	3.750	1.687
50	3.125	4.000	3.875	1.750
52	3.250	4.125	4.000	1.750
54	3.375	4.250	4.125	1.750
56	3.500	4.375	4.250	1.875
58	3.625	4.500	4.375	1.875
60	3.750	4.625	4.500	1.875
62	3.875	4.750	4.625	1.875
64	4.000	4.875	4.750	1.875

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 300 PSI (21.1Kg/cm²)

Temperature: -57°C to 316°C

**Depends on elastomer material*

- **Metal Parts:** 316 Stainless Steel, Hastelloy "C"
- **Seat:** Silicon Carbide, Tungsten Carbide
- **Bellow:** NBR (Nitrile), FKM (Viton®), E.P.R (EPDM), Kalrez/Perlast (FFKM), Aflas (TFE/P), Creavey (PTFE/FKM).
- **Rotary Face:** Graphite, Silicon Carbide, Tungsten Carbide
- **Spring:** Hastelloy "C", Alloy AM-350

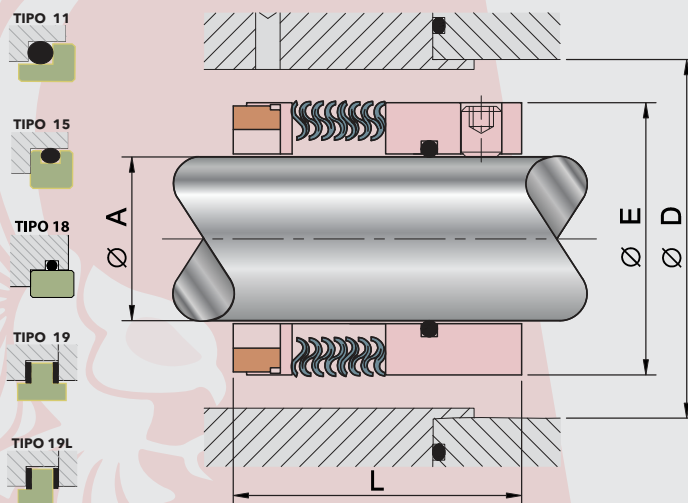

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

