



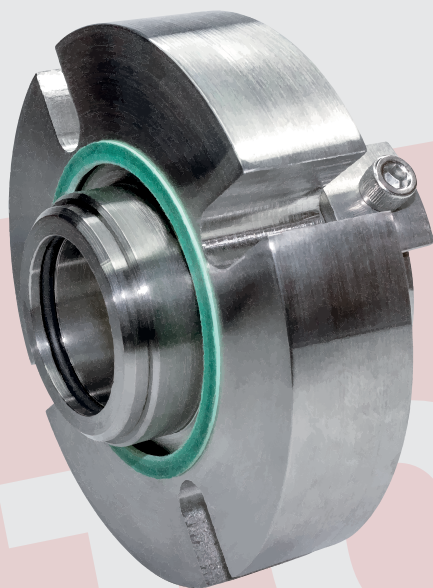

DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	B ±0.015	C MIN.	D MAX.	E ±0.015	F ±0.015	G MIN.	G MAX.	H ±0.015
16	1.000	4.000	1.625	1.531	1.812	0.437	2.875	3.625	0.437
18	1.125	4.250	1.750	1.656	1.812	0.437	3.000	3.875	0.437
20	1.250	4.250	1.875	1.781	1.812	0.437	3.125	3.875	0.437
22	1.375	4.375	2.000	1.907	1.875	0.437	3.250	4.000	0.437
24	1.500	4.500	2.125	2.031	1.875	0.437	3.375	4.125	0.437
26	1.625	5.250	2.375	2.250	2.000	0.500	3.750	4.750	0.562
28	1.750	5.500	2.500	2.375	2.000	0.500	3.875	5.000	0.562
30	1.875	5.500	2.625	2.500	2.000	0.500	4.000	5.000	0.562
32	2.000	6.000	2.750	2.625	2.000	0.500	4.250	5.000	0.562

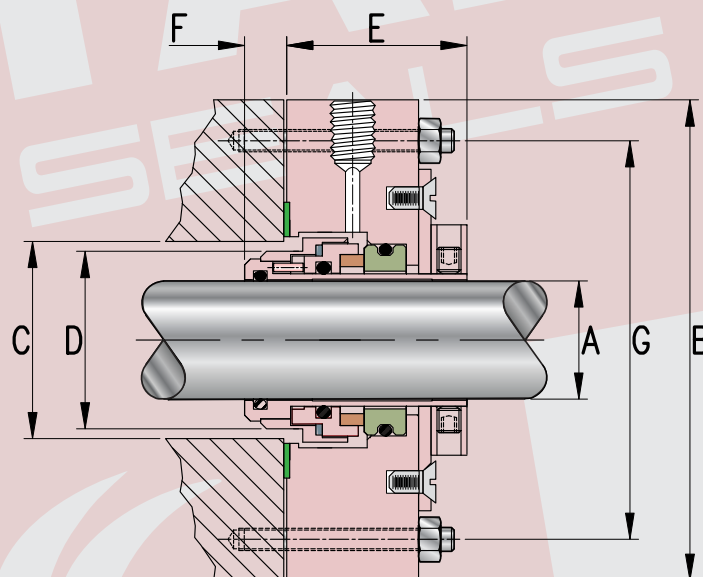

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 125 PSI (8.8Kg/cm²)

Temperature: -57°C to 204°C*

*Depends on elastomer material

- **Metal Parts:** 316 Stainless Steel
- **Seat:** Ceramic, Silicon Carbide, Tungsten Carbide, Stainless Steel, Ni-Resist
- **Bellow:** NBR (Nitrile®), FKM (Viton®), EPDM (EPDM), Kalrez/Perlast (FFKM), Aflas (TFE/P), Silicon (VMQ).
- **Rotary Face:** Graphite, Tungsten Carbide, Silicon Carbide
- **Spring:** 316 Stainless Steel

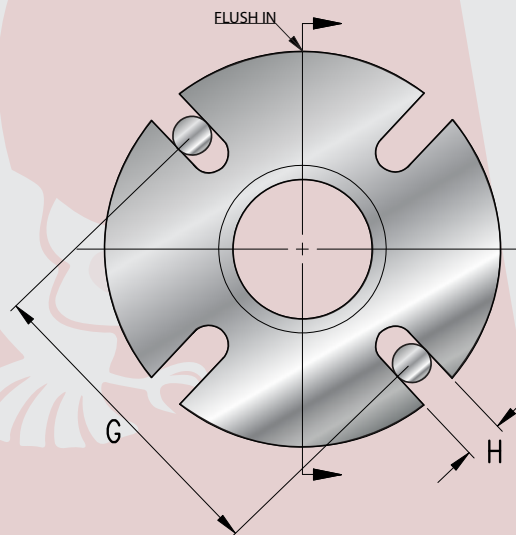

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

