


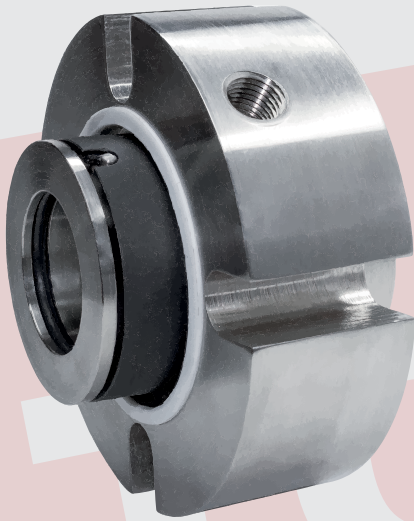

DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	B ±0.015	C MIN.	D MAX.	E ±0.015	F ±0.015	G ±0.015	H ±0.015
20	1.250	4.250	1.695	1.625	2.000	0.750	3.213	0.562
22	1.375	4.375	1.820	1.750	2.000	0.750	3.338	0.562
24	1.500	4.875	2.007	1.937	2.000	0.750	3.599	0.562
26	1.625	5.000	2.132	2.062	2.000	0.750	3.766	0.562
28	1.750	5.250	2.240	2.170	2.000	0.750	3.875	0.562
30	1.875	5.250	2.382	2.312	2.000	0.750	3.875	0.562
32	2.000	5.500	2.507	2.437	2.000	0.875	4.000	0.562
34	2.125	5.875	2.632	2.562	2.000	0.875	4.469	0.687
36	2.250	6.500	2.757	2.687	2.000	0.875	4.566	0.687
38	2.375	6.500	2.882	2.812	2.000	0.875	4.719	0.687
40	2.500	6.750	3.132	3.062	2.000	0.875	5.000	0.687

OPERATING CONDITIONS



Speed: Up to 3,600 RPM.

Pressure: 450 PSI (32.0Kg/cm²)

Temperature: -57°C to 316°C*

*Depends on elastomer material

- **Metal Parts:** 316 Stainless Steel
- **Seat:** Silicon Carbide, Graphite.
- **Bellow:** NBR (Nitrile®), FKM (Viton®), EPR (EPDM), Kalrez/Perlast (FFKM), Aflas (TFE/P), Creavey (PTFE/FKM), Silicon (VMQ).
- **Rotary Face:** Graphite, Silicon Carbide
- **Spring:** Hastelloy "C"

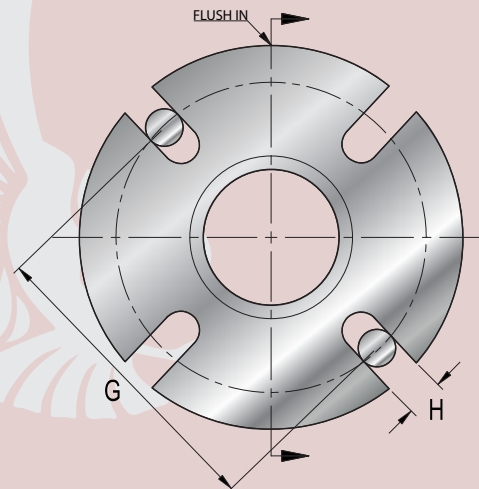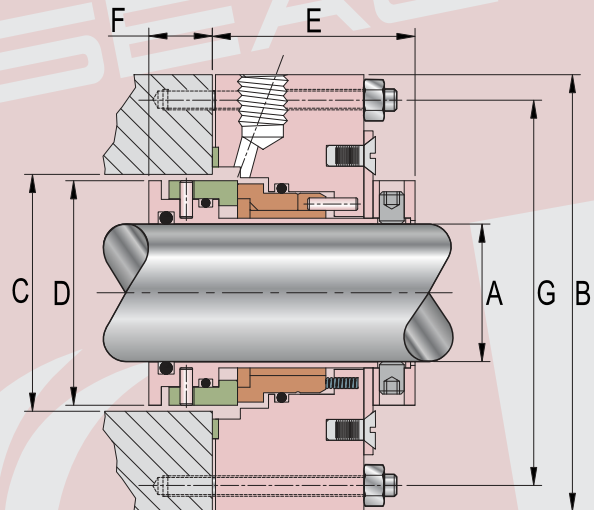

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

