



DIMENSIONAL DATA (INCHES)

SIZE No.	A ±0.002	STEP ±0.002	D ±0.002	E ±0.015	L ±0.015
16	1.000	0.875	1.625	1.437	1.312
18	1.125	1.000	1.750	1.562	1.375
20	1.250	1.125	1.875	1.687	1.375
22	1.375	1.125	2.125	1.937	1.687
24	1.500	1.250	2.125	1.937	1.437
26	1.625	1.375	2.437	2.250	1.593
28	1.750	1.500	2.500	2.312	1.750
30	1.875	1.625	2.687	2.500	1.750
32	2.000	1.750	2.812	2.625	1.750
34	2.125	1.875	3.000	2.812	2.062
36	2.250	2.000	3.031	2.843	1.750
38	2.375	2.125	3.187	3.000	2.062
40	2.500	2.250	3.312	3.125	1.750
42	2.625	2.375	3.437	3.250	2.062
44	2.750	2.500	3.562	3.375	2.062
46	2.875	2.625	3.687	3.500	2.062
48	3.000	2.750	3.812	3.625	2.062
50	3.125	2.875	3.937	3.750	2.062
52	3.250	3.000	4.062	3.875	2.062
54	3.375	3.125	4.187	4.000	2.062
56	3.500	3.250	4.312	4.125	2.062
58	3.625	3.375	4.437	4.250	2.062
60	3.750	3.500	4.562	4.375	2.062
62	3.875	3.625	4.687	4.500	2.062
64	4.000	3.750	4.812	4.625	2.062

OPERATING CONDITIONS


Speed: Up to 3,600 RPM.

Pressure: 300 PSI (21Kg/cm²)

Temperature: -57°C to 316°C

**Depends on elastomer material*

- **Metal Parts:** 316 Stainless Steel
- **Seat:** Ceramic, Silicon Carbide, Tungsten Carbide, Stainless Steel, Ni- Resist.
- **Bellow:** NBR (Nitrile), FKM (Viton®), CR (Neopreno®), E.P.R (EPDM), Kalrez/Perlast (FFKM), Aflas (TFE/P), Creavey (PTFE/FKM), Silicón (VMQ)
- **Rotary Face:** Graphite
- **Spring:** Hastelloy "C"

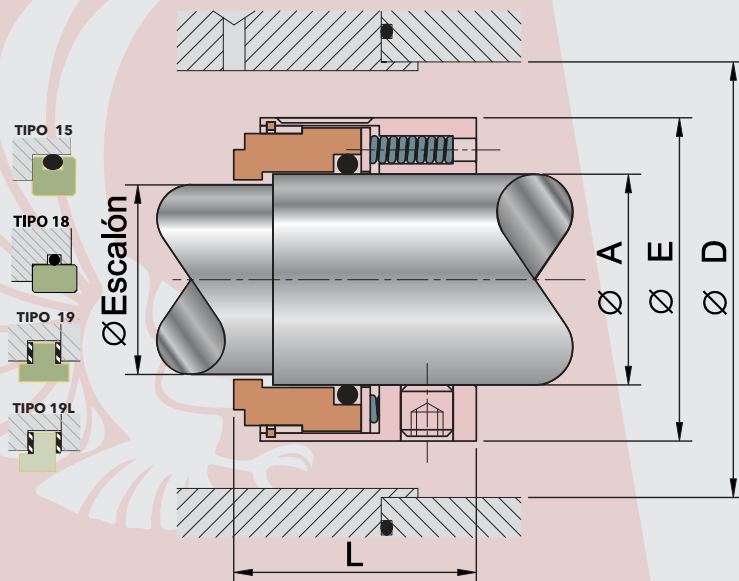

"If you have any questions regarding the materials and/or dimensions, please contact us at sales@total-seals.com

